





TRANSFORMING HARDSCAPES

JNILOCK®

THE **ONE** INNOVATOR WITH GAME-CHANGING PRODUCTS

BUILD VERTICALS FASTER

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features in hours – not days!

Simply build the sturdy, aluminum frame in any configuration and choose from a wide selection of fascia panels to clad it with.











TABLE OF CONTENTS - CHICAGO

PAVERS

ADA Paver 4
Anchorlock™
Arcana™ 6
Artline™ II Campo°
Artline [™] Smooth 8
Artline [™] Umbriano [°]
Beacon Hill™ Flagstone
Beacon Hill™ Smooth
Bristol Valley® 14
Brussels Block® 16
Copthorne°
Courtstone°
Eco-Line® 19
Eco-Optiloc™
Eco-Priora [™] 21
Eco-Promenade® 22
Promenade EcoTerra [™] 23
Granito™
Hex [™] 25
Hollandstone [™]
Holland Premier™ 28
Mattoni [™] 29
Natural Stone - Limestone
Natural Stone - Sandstone
Nordic Cobble™ 34
Optiloc°
Porcelain
Promenade [™] 39
Richcliff° 41
Series [™]
Skyline™
Soreno [™]
Town Hall°
Treo° Smooth 47
Tribeca Cobble™
Turfstone™ 49
Umbriano™ 50
Westport [™] 52
Westport [™] Smooth

RETAINING WALLS

Brussels Dimensional Stone®	54
DuraHold®	55
Estate Wall™	56
Lineo™ Dimensional Stone	57
Mackinaw™	58
Olde Quarry™	59
Olde Quarry™ Smooth	60
Pisa [™]	61
Pisa [™] Smooth XL	62
Rivercrest® Wall	63
SienaEdge™	64
SienaStone™	65
U-Cara® Multiface Wall System	67
U-Cara® Modular System	72
U-Cara® Wall Mount System	73
Architectural Coping	74
Brussels Fullnose [™]	75
6x12 Fullnose	76
Ledgestone [™]	77
Umbriano® Coping	79
Universal U-Grip™ Base	80

FIRE FEATURES

Sunset Firepit	.81
Jnilock Elements	82

ACCESSORIES

Paver Cleaners and Adhesives	.84
Paver Sealers and Sand Products	. 85
Permeable Chip Products	.86
Geotextiles and Fabric Products	.86
Gator Base System	. 87
Edging & Stainless FP Insert	. 88
Unilock Pedestal System	.89

PRODUCT AND INSTALLATION INFORMATION

Sealer and Polysand Best Practices	90
Terms and Conditions of Sale	91
Laying Patterns	92
Freight Rates	94
Important Notes	94
Product Directory	98

APPLICATION INDEX







Pedestrian







Roadways-Permeable









Fire feature







Seat walls



Borders & accents







Structural wall

Garden wall

Pillar





Wall Coping

Pool coping Step treads



DESCRIPTION OF EDGE DETAILS





Zero-Edge





Rounded Bevel

Micro Bevel

ADA Paver CLASSIC



APPLICATIONS







APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES CLASSIC

Budget-friendly traditional product mix

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936 Eligible for LEED v4.1 credits

	12 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Sections	-
	Stone	0.97

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Sections	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	1.02
	Sections	-
	Layer	11.81
	Bundle	94.49

	SqFt	1.03	
UNITS PER	Sections	-	
	Bundle	96.00	

	Layer	389
LBS PER	Sections	-
	Bundle	3,114

COLORS	Reflectance	Stock
Charcoal	SR n/a SRI n/a	S0
Red	SR n/a SRI n/a	SO



COMMERCIAL

Single Unit



STANDARD300 x 300 x 70mm
11% x 11% x 2 ¾
96 units/Bundle
.97 Sq.Ft./Stone

Anchorlock[™] CLASSIC



APPLICATIONS









APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix


DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936 Eligible for LEED v4.1 credits

LAYING PATTERN



Anchorlock A

	8 % x 8 %
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 MM

SQFT PER	Bundle	86.72
	Layer	10.84
	Sections	-
	Stone	0.41

PER BUNDLE	Layers	8.00
	Sections	-

	SqFt	-
SOLDIER LNFT PER	Sections	-
SOLDIER LNFT PER	Layer	-
	Bundle	-

	SqFt	-
SAILOR LNFT PER	Sections	-
SAILOR LINFT PER	Layer	-
	Bundle	-

	SqFt	2.46	
UNITS PER	Sections	-	
	Bundle	213.36	

	Layer	374
LBS PER	Sections	-
	Bundle	2,991

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO

05

Single Unit



STANDARD225 x 225 x 80mm
8 % x 8 % x 3 %
213.36 units/Bundle
.41 Sq.Ft./Stone





		12 x 24	18 x 24	24 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	50 MM	50 MM	50 MM
	Bundle	36.00	54.00	72.00
SQFT PER	Layer	4.00	6.00	8.00
SUFTPER	Sections	-	-	-
	Stone	2.00	3.00	4.00





APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (1)



Factory sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

	Stone	2.00	3.00	4.00
PER BUNDLE	Layers	9.00	9.00	9.00
FER DONDEL	Sections	-	-	-
	SqFt	0.49	0.50	0.50
SOLDIER LNFT PER	Sections	-	-	-
SOLDIER ENIT PER	Layer	1.98	2.97	3.98
	Bundle	17.78	26.75	35.79
	SqFt	0.99	0.66	0.50
SAILOR LNFT PER	Sections	-	-	-
SAILOR LINE I FLIX	Layer	3.98	3.98	3.98
	Bundle	35.79	35.79	35.79
	I			
	SqFt	0.50	0.33	0.25
UNITS PER	Sections	-	-	-
	Bundle	18.00	18.00	18.00
	l .			
	Layer	96	144	192
LBS PER	Sections	-	-	-
	Bundle	864	1,296	1,728

COLORS	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	✓	✓	✓
Corvara	SR n/a SRI 34	✓	1	✓
Modena	SR n/a SRI 53	✓	1	✓
Vivanto	SR n/a SRI 16	1	1	1

LAYING PATTERNS










Arcana Random C

Arcana Random F

X & T Slab Spacers Bagged Separately (see page 86)

CONTRACTORS COMMERCIAL







24 x 24 606 x 606 x 50mm 23% x 23% x 2" 18 units/Bundle 4 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Unilock recommends installing Arcana using X & T Slab Spacers. Please see page 86. Contact Unilock for more information.

Artline™ II Campo® Finish





APPLICATIONS









APPEARANCE

Edge Detail - Micro Surface Texture - II Campo Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERN



Artline Random A

7 Unit Random Bundle

7 Unit Random Bundle

Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	70 MM

SOFT DED	Bundle	93.25
	Layer	11.66
SQFT PER	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-	
	Sections	-	
	Layer	-	
		Bundle	-

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

	SqFt	-	
UNITS PER	Sections	-	
	Bundle	192.00	

	Layer	370
LBS PER	Sections	-
	Bundle	2,963

ı	COLORS	Reflectance	Stock
	Bavarian Blend	SR n/a SRI n/a	✓
	Granite Blend	SR n/a SRI n/a	1





CONTRACTORS

COMMERCIAL



UNIT A125 x 169 x 70mm
4% x 6% x 2%"
32 units/Bundle
.23 Sq.Ft./Stone



UNIT B125 x 262.5 x 70mm
4 % x 10 % x 2 ¾"
32 units/Bundle
.35 Sq.Ft./Stone



UNIT C125 x 337.5 x 70mm
4 % x 13 % x 2 ¾"
32 units/Bundle
.45 Sq.Ft./Stone



UNIT D125 x 450 x 70mm
4 % x 17 ¾ x 2 ¾"
32 units/Bundle
.61 Sq.Ft./Stone



UNIT E 187.5 x 225 x 70mm 7½ x 8% x 2¾" 32 units/Bundle .45 Sq.Ft./Stone



UNIT F 187.5 x 337.5 x 70mm 7½ x 13¾ x 2¾" 16 units/Bundle .69 Sq.Ft./Stone



UNIT G 187.5 x 450 x 70mm 7½ x 17¾ x 2¾" 16 units/Bundle .91 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Artline™ Smooth Finish





APPLICATIONS









APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance

COMFORT STEP



Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	_

	SqFt	-
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	-
	Bundle	-

	SqFt	-
UNITS PER	Sections	-
	Bundle	192.00

	Layer	370
LBS PER	Sections	•
	Bundle	2,963

COLORS	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	/
Fossil	SR n/a SRI 21	✓
Steel Mountain	SR n/a SRI 32	/

LAYING PATTERN



Artline Random A



UNIT A 125 x 169 x 70mm 4 1/8 x 6 3/4 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone



UNIT B 125 x 262.5 x 70mm 4 1/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone



CONTRACTORS



COMMERCIAL



125 x 337.5 x 70mm 4 1/8 x 13 3/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone



125 x 450 x 70mm 4 1/8 x 17 3/4 x 2 3/4" 32 units/Bundle .61 Sq.Ft./Stone



.45 Sq.Ft./Stone

UNIT F

187.5 x 337.5 x 70mm $7\frac{1}{2} \times 13\frac{3}{8} \times 2\frac{3}{4}$ " 16 units/Bundle .69 Sq.Ft./Stone



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Artline[™] Umbriano[®] Finish





APPLICATIONS









APPEARANCE

Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

	SqFt	-
SOLDIER LNFT PER	Sections	-
	Layer	-
	Bundle	-

	SqFt	-
SAILOR LNFT PER	Sections	-
SAILOR LINFT PER	Layer	-
	Bundle	-

		SqFt	-
UNITS PE	R	Sections	-
		Bundle	192.00

	Layer	373
LBS PER	Sections	-
	Bundle	2,986

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	✓
Winter Marvel	SR .35 SRI 38	

LAYING PATTERN



Artline Random A



125 x 169 x 70mm 4 1/8 x 6 3/4 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone




UNIT B 125 x 262.5 x 70mm 4 1/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone



CONTRACTORS



COMMERCIAL





125 x 337.5 x 70mm 4 1/8 x 13 3/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone



UNIT D 125 x 450 x 70mm $4\% \times 17\% \times 2\%$ 32 units/Bundle .61 Sq.Ft./Stone



UNIT E 187.5 x 225 x 70mm $7\frac{1}{2} \times 8\frac{3}{8} \times 2\frac{3}{4}$ " 32 units/Bundle .45 Sq.Ft./Stone



UNIT F 187.5 x 337.5 x 70mm $7\frac{1}{2} \times 13\frac{3}{8} \times 2\frac{3}{4}$ " 16 units/Bundle .69 Sq.Ft./Stone



UNIT G 187.5 x 450 x 70mm $7\frac{1}{2} \times 17\frac{3}{4} \times 2\frac{3}{4}$ " 16 units/Bundle .91 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid .Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Beacon Hill™ Flagstone 60mm





APPLICATIONS



APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C

			XL UNIT
	Bundle Type	RANDOM	SINGLE
	Plant Produced	MARENGO	MARENGO
	Thickness (mm)	60 MM	60 MM
	Bundle	116.57	116.57
SOET DED	Layer	11.66	11.66
SQFT PER	Section	-	-
	Stone	-	5.83
DED DUNDI E	Layers	10.00	10.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.32
SOLDIER LNFT PER	Section	-	-
SOLDIER LINFT PER	Layer	-	3.74
	Bundle	-	37.40
	SqFt	0.80	0.53
	Section	-	-
SAILOR LNFT PER	Layer	9.35	6.23
	Bundle	93.50	62.30
	SqFt	-	0.17
UNITS PER	Section	-	-
	Bundle	80.00	20.00
	Layer	322	324
LBS PER	Section	-	-
	Bundle	3,221	3,241

COLORS	Reflectance	Stock	Stock
Alpine Grey	SR n/a SRI n/a	✓	✓
Bavarian	SR n/a SRI n/a	✓	✓
Fossil	SR n/a SRI n/a	✓	✓ ·
Walnut	SR n/a SRI n/a	/	-







COMMERCIAL



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 60mm 15 x 7½ x 23/8" 30 units/Bundle .69 Sq.Ft./Stone



XL UNIT 950 x 570 x 60mm 371/2 x 221/2 x 23/8" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Single Unit

Beacon Hill™ Flagstone 80mm





APPLICATIONS









APPEARANCE

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS







BeaconHill Fixed Random B

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

	Bundle	81.60
SOET DED	Layer	11.66
SQFT PER	Section	-
	Stone	-

PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-

	SqFt	-
SOLDIER LNFT PER	Section	-
SOLDIER LIFT PER	Layer	-
	Bundle	-

	SqFt	0.80
SAILOR LNFT PER	Section	-
SAILUR LINFT PER	Layer	9.35
	Bundle	65.45

	SqFt	-
UNITS PER	Section	-
	Bundle	56.00

	Layer	426
LBS PER	Section	-
	Bundle	2,979

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓
Walnut	SR n/a SRI n/a	✓







COMMERCIAL

Unit Random Bundle



LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 ½ "14 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 80mm 15 x 15 x 31/8" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 80mm 15 x 7½ x 3½" 21 units/Bundle .69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.







APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color




EASYCLEAN™ (Champagne and Opal)

Factory sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS







BeaconHill Fixed Random B

			SMALL RECTANGLE	XL UNIT
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	MARENGO	MARENGO	MARENGO
	Thickness (mm)	60 MM	60 MM	60 MM
	Bundle	116.57	116.57	116.57
SQFT PER	Layer	11.66	11.66	11.66
SQFIPER	Sections	-	-	-
	Stone	-	0.78	5.83
PER BUNDLE	Layers	10.00	10.00	10.00
PER BUNDLE	Sections	-	-	-
	SqFt	-	0.80	0.32
SOLDIER LNFT PER	Sections	-	-	-
SOLDIER LINFT PER	Layer	-	9.35	3.74
	Bundle	-	93.50	37.40
	SqFt	0.80	1.60	0.53
SAILOR LNFT PER	Sections	-	-	-
SAILUR LIFT PER	Layer	9.35	18.70	6.23
	Bundle	93.50	187.01	62.30
	SqFt	-	1.29	0.17
UNITS PER	Sections	-	-	-
	Bundle	80.00	150.00	20.00
	Layer	322	315	325
LBS PER	Sections	-	-	-
	Bundle	3,216	3,150	3,249

COLORS	Reflectance	Stock	Stock	Stock
Bavarian	SR n/a SRI n/a	1	✓	✓
Dark Charcoal	SR n/a SRI n/a	-	1	-
Fossil	SR .22 SRI 21	1	-	✓
Granite Fusion	SR .28 SRI 29	1	✓	✓
Ivory	SR n/a SRI n/a	-	✓	-
Champagne 😈	SR n/a SRI n/a	✓	✓	✓
Opal Blend 0	SR n/a SRI n/a	✓	-	✓



CONTRACTORS



COMMERCIAL

Unit Random Bundle



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone




SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 60mm 15 x 71/2 x 23/8" 30 units/Bundle .69 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 60mm $15 \times 7 \frac{1}{2} \times 2\frac{3}{8}$ " 150 Units/Bundle .78 Sq.Ft./Stone



XL UNIT 950 x 570 x 60mm 37½ x 22½ x 23%" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Single Unit

Beacon Hill™ Smooth 80mm





APPLICATIONS









APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Opal Only)



Factory sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS







BeaconHill Fixed Random B

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

COLL DED	Bundle	81.60
	Layer	11.66
SQFT PER	Section	-
	Stone	-

PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-

	SqFt	-
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	-
	Bundle	-

	SqFt	0.80
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	9.35
	Bundle	65.45

	SqFt	-
UNITS PER	Section	-
	Bundle	56.00

	Layer	426		
	LBS PER	Section	-	
		Bundle	2,982	

COLORS	Reflectance	Stock
Bavarian	SR .22 SRI 21	/
Fossil	SR .28 SRI 29	SO
Granite Fusion	SR .28 SRI 29	/
Opal Blend 😈	SR .28 SRI 29	S0







COMMERCIAL

Random Bundle



LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 1/8" 14 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 80mm 15 x 15 x 3 1/8" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 80mm 15 x 7½ x 3½" 21 units/Bundle .69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.







APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance

COMFORT STEP




Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Bristol Valley Random A Bristol Valley Random B

			XL UNIT
	Bundle Type	RANDOM	SINGLE
	Plant Produced	MARENGO	MARENGO
	Thickness (mm)	60 MM	60 MM
	Bundle	116.57	116.57
	Layer	11.66	11.66
SQFT PER	Section	-	-
	Stone	-	5.83
	Layers	10.00	10.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.32
	Section	_	-
SOLDIER LNFT PER	Layer	-	3.74
	Bundle	-	37.40
	SqFt	0.80	0.53
	Section	-	-
SAILOR LNFT PER	Layer	9.35	6.23
	Bundle	93.50	62.30
	SqFt	_	0.17
UNITS PER	Section	-	-
	Bundle	80.00	20.00
	Layer	330	321
LBS PER	Section	_	-
	Bundle	3,302	3,210

COLORS	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	/
Fossil	SR n/a SRI n/a	/	/
Steel Mountain	SR n/a SRI n/a	/	/
Walnut	SR n/a SRI n/a	/	-





CONTRACTORS





M



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



SOUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 ½ x 2 3/8" 30 units/Bundle .69 Sq.Ft./Stone



XL UNIT 950 x 570 x 60mm $37\frac{1}{2} \times 22\frac{1}{2} \times 2\frac{3}{8}$ " 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Single Unit













APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (i)



Factory sealed to provide integral stain resistance

COMFORT STEP





Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS





Bristol Valley Random A Bristol Valley Random B

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

	Bundle	81.60
SQFT PER	Layer	11.66
SQFIPER	Sections	-
	Stone	-

PER BUNDLE	Layers	7.00
PER DUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	0.80
	Sections	-
	Layer	9.35
	Bundle	65.45

	SqFt	-	
UNITS PER	Sections	-	
	Bundle	56.00	

	Layer	418
LBS PER	Sections	-
	Bundle	2,925

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	S0
Steel Mountain	SR n/a SRI n/a	/





CONTRACTORS

COMMERCIAL

Unit Random Bundle



LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 1/8" 14 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 80mm 15 x 15 x 3 1/8" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 80mm 15 x 7 ½ x 3 1/8" 21 units/Bundle 69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.











APPEARANCE

Edge Detail - Zero Surface Texture - Weathered Joint Spacing - 2 mm

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


LAYING PATTERNS







Brussels Multi-Unit Random AE



Brussels Multi-Unit Random AD

.20 Sq.Ft./Stone

		HALF	STANDARD	XL
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	EL	KHORN / CHICAG	GO
	Thickness (mm)	70 MM	70 MM	70 MM
	Bundle	88.70	94.91	95.70
SQFT PER	Layer	11.09	11.86	9.57
SUFFER	Sections	12.67	15.82	31.90
	Stone	0.20	0.40	0.80
DED BUNDLE	Layers	8.00	8.00	10.00
PER BUNDLE	Sections	7.00	6.00	3.00
	SqFt	1.72	1.44	0.86
001 DIED 1 NET DED	Sections	21.84	22.70	27.30
SOLDIER LNFT PER	Layer	19.11	17.03	8.19
	Bundle	152.86	136.22	81.89
	SqFt	2.87	1.73	1.43
SAILOR LNFT PER	Sections	36.33	27.30	45.67
SAILUR LNFT PER	Layer	31.78	20.47	13.70
	Bundle	254.28	163.78	137.01
	SqFt	5.05	2.53	1.25
UNITS PER	Sections	64.00	40.00	40.00
	Bundle	448.00	240.00	120.00
	Layer	358	389	311
LBS PER	Sections	409	518	1,037
	Bundle	2,865	3,110	3,112

COLORS	Reflectance	Stock	Stock	Stock
Limestone	SR .28 SRI 29	✓	✓	1
River	SR n/a SRI 34	✓	✓	/
Sandstone	SR .41 SRI 46	✓	1	/
Sierra	SR n/a SRI n/a	✓	/	/



CONTRACTORS



COMMERCIAL





HALF







208 x 348 x 70mm 8 ½ x 13 ¾ x 2 ¾" 120 units/Bundle .80 Sq.Ft./Stone

Copthorne[®]





APPLICATIONS









APPEARANCE

Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

Cast from historic street pavers

$\textbf{ULTIMA}^{\text{TM}}$

Up to 4x stronger than poured-in-place concrete

EASYCLEAN™ 🕕




Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS





Copthorne BW A

Copthorne RB C

	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	60 MM
	Bundle	89.20
	Layer	11.15
SQFT PER	Sections	11.10
	Stone	0.15
	Stone	0.15
PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.43
	Sections	-
SOLDIER LNFT PER	Layer	15.99
	Bundle	127.95
	SqFt	4.41
	Sections	7.71
SAILOR LNFT PER	Layer	49.21
	Bundle	393.70
	·	
	SqFt	6.73
UNITS PER	Sections	-
	Bundle	600.00
	Layer	294
LBS PER	Sections	-
	Bundle	2,349

COLORS	Reflectance	Stock
Artic Grey	SR 49 SRI 57	✓
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI 38	✓
Burnt Clay	SR n/a SRI 40	✓
Old Oak	SR n/a SRI 41	/
Steel Blue	SR n/a SRI n/a	✓





CONTRACTORS

COMMERCIAL

Single Unit



STANDARD 65 x 200 x 60mm 25/8 x 7 1/8 x 2 3/8" 600 Units/Bundle .15 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 90. Contact Unilock for more information.













APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 15 mm

TECHNOLOGIES ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

REALA™

Cast from European cobblestones

ULTIMA™

Up to 4x stronger than poured-in-place concrete

EASYCLEAN™ 🕕

Factory sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS

Courtstone Random A





LARGE RECTANGLE185 x 130 x 60mm
73/8 x 5 x 23/8"
64 Units/Bundle
.28 SqFt/Stone



RECTANGLE 165 x 130 x 60mm 6 ½ x 5 x 2 3/8" 64 Units/Bundle .23 SqFt/Stone




SMALL RECTANGLE145 x 130 x 60mm
5 x 5 34 x 2 3/6"
64 Units/Bundle
.20 SqFt/Stone



SQUARE 130 x 130 x 60mm 5x 5 x 2 3/6" 64 Units/Bundle .18 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 90. Contact Unilock for more information.

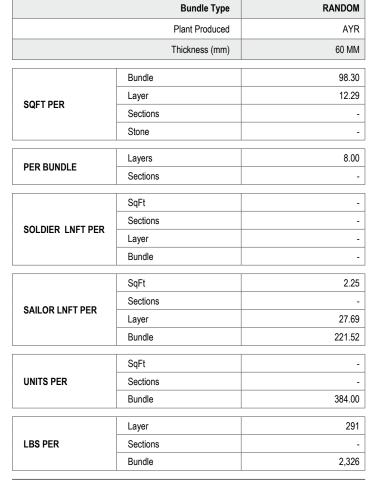

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓



CONTRACTORS




COMMERCIAL

Bundle

Random

Unit



RANDOM

55.17

11.03

5.00

160.00

513

2,564

Stock

S0

MULTI-PLANT 100 MM

Bundle Type

Plant Produced

Thickness (mm)

Bundle Layer

Sections Stone Layers

Sections SqFt Sections

Layer

Bundle

SqFt

Layer Bundle

SqFt

Layer

Sections

Bundle

Please contact your local Sales Representative for color options.

Reflectance

SR n/a SRI n/a

Sections Bundle

Sections

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Custom Colors & Finishes



APPLICATIONS











APPEARANCE

Edge Detail - Micro Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 6.25 mm Void - 5.80%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)



Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Ecoline Fixed Random A



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



Exposed Granite Finish



SMOOTH Premier Finish



Mottled Finish with/ ColorFusion and EasyClean



Pii



20 Units/Bundle

.32 SqFt/Stone



UNIT B 317 x 84 x 100mm 12 1/2 x 3 3/8 x 3 7/8" 20 Units/Bundle .29 SqFt/Stone



UNIT C 277 x 84 x 100mm $10\% \times 3\% \times 3\%$ " 20 Units/Bundle .25 SqFt/Stone



UNIT D 237 x 84 x 100mm $9\% \times 3\% \times 3\%$ " 20 Units/Bundle .21 SqFt/Stone



UNIT E 357 x 114 x 100mm 14 x 4 ½ x 3 1/8" 20 Units/Bundle .44 SqFt/Stone



UNIT F 317 x 114 x 100mm 12 1/2 x 4 1/2 x 3 7/8" 20 Units/Bundle .39 SqFt/Stone



277 x 114 x 100mm 10 % x 4 ½ x 3 %" 20 Units/Bundle .34 SqFt/Stone



UNIT H 237 x 114 x 100mm $9\frac{3}{8} \times 4\frac{1}{2} \times 3\frac{7}{8}$ " 20 Units/Bundle .29 SqFt/Stone



Bundle Type

Plant Produced Thickness (mm)

Bundle

Layer

Stone

Layers

SqFt Sections

Layer

SqFt

Layer Bundle

SqFt

Sections

Bundle

Layer

Sections

Sections

Bundle

Sections

Sections

ALL FINISHES

SINGLE MULTI-PLANT

80 MM

84.80 10.60

0.50

8.00

1.98

168.00

358

2,860

Stock

SO



APPLICATIONS











APPEARANCE

Edge Detail - Chamfer Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 7mm Void - 7.3%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)



Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



EcoOptiloc Cluster A

SAILOR LNFT PER
UNITS PER
LBS PER
COLORS
Custom Colors & Finis
Please contact your

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

	Bundle		
	Reflectance		
rs & Finishes	SR n/a SRI n/a		
act your local S	ales Representativ	e for color options.	



COMMERCIAL



CLASSIC Thrumix Finish



IL CAMPO® **Brushed Finish**



SERIES™ Exposed Granite Finish



HTOOM2 Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

Single Unit



STANDARD 250 x 250 x 80mm 9 % x 9 % x 3 1/8" 168 Units/Bundle .50 SqFt/Stone







APPLICATIONS











APPEARANCE

Edge Detail - Micro Surface Texture - Smooth / Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 7mm Void - 4.6-7.08%

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)



Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS

See laying patterns on page 92.

		CLASSIC	ENDURACOLOR
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	80 MM	80 MM
	Bundle	75.95	75.95
SQFT PER	Layer	10.85	10.85
SQFIPER	Section	-	-
	Stone	0.31	0.31
PER BUNDLE	Layers	7.00	7.00
PER BUNDLE	Sections	-	-
	SqFt	1.27	1.27
COLDIED LINET DED	Section	-	-
SOLDIER LNFT PER	Layer	13.78	13.78
	Bundle	96.46	96.46
	SqFt	2.54	2.54
CAN OR LAIFT REP	Section	-	-
SAILOR LNFT PER	Layer	27.56	27.56
	Bundle	192.91	192.91
	SqFt	3.23	3.23
UNITS PER	Section	-	-
	Bundle	245.00	245.00
	Layer	381	388
LBS PER	Section	-	-
	Bundle	2,669	2,717

COLORS	Reflectance	Stock	Stock
Granite	SR .26 SRI 27	-	✓
River	SR .32 SRI 34	✓	-
Sierra	SR n/a SRI n/a	✓	-
Custom Colors & Finishes	SR n/a SRI n/a	S0	SO
Please contact your local Sales Representative for color options.			





CONTRACTORS

COMMERCIAL



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES" Exposed Granite Finish



SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

Single Units



RECTANGLE 120 x 240 x 80mm 43/4 x 91/2 x 3 1/8" 245 units/Bundle .31 Sq.Ft./Stone



RECTANGLE 120 x 240 x 80mm 43/4 x 91/2 x 3 1/8" 217 units/Bundle



SMALL UNIT 120 x 120 x 80mm 4³/₄ x 4³/₄ x 3 ¹/₈" 56 units/Bundle





APPLICATIONS











APPEARANCE

Edge Detail - Micro Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 7 mm Void - 10.12 %

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)



Factory sealed to provide integral stain resistance


COLOR FUSION™ (Umbriano)

Subtly mottled color finish


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



EcoPromenade 3x12 RB_A



EcoPromenade 3x12_DHB_B

	ALL FINISHES
Bundle Type	SINGLE
Plant Produced	MULTI-PLANT
Thickness (mm)	100 MM

	Bundle	63.94
SOET DED	Layer	10.66
SQFT PER	Section	-
	Stone	0.24

PER BUNDLE	Layers	6.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	10.83
	Bundle	64.96

SAILOR LNFT PER	SqFt	4.06
	Section	-
SAILOR LINFT PER	Layer	43.31
	Bundle	259.84

	SqFt	4.13
UNITS PER	Section	-
	Bundle	264.00

	Layer	465
LBS PER	Section	-
	Bundle	2,789

COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO
Please contact your local	Sales Representativ	e for color options.





CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES™ **Exposed Granite Finish**



HTOOM2 Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



STANDARD 75 x 300 x 100mm 3 x 11 1/8 x 3 1/8" 264 units/Bundle .24 Sq.Ft./Stone

Promenade EcoTerra™





APPLICATIONS





APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - n/a Void - n/a

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color


ECOTERRA®

Reduced carbon emissions and refined surface protection

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



		4 x 12
	Bundle Type	SINGLE
	Plant Produced	ONTARIO
	Thickness (mm)	70 MM
	Bundle	93.04
	Layer	11.63
SQFT PER	Section	-
	Stone	0.32
DED DUNDLE	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.02
	Section	-
SOLDIER LNFT PER	Layer	11.81
	Bundle	94.49
	SqFt	3.05
CALLOD LAIFT DED	Section	-
SAILOR LNFT PER	Layer	35.43
	Bundle	283.46
	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00
	Layer	393
LBS PER	Section	-
	Bundle	3,140
COLORS	Reflectance	Stock

COLORS	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	/
Light Steel Gray	SR n/a SRI n/a	/



CONTRACTORS


Single Unit



4 x 12 100 x 300 x 70 mm 3% x 11% x 23/4 288 units/Bundle .32 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.













APPEARANCE

Edge Detail - Rounded Surface Texture - Granito Textured Joint Spacing - 7 mm Void - n/a

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

ARTISTA™

Boldly mottled color finish


EASYCLEAN™

Factory Sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS







Pattern Hex_A

		ENDURACOLOR	HEX
	Bundle Type	RANDOM	SINGLE
	Plant Produced	PICKERING	PICKERING
	Thickness (mm)	60 MM	70 MM
	Bundle	94.14	73.92
SQFT PER	Layer	10.46	9.24
OQ: 11 EK	Section	-	-
	Stone	-	2.6
	Layers	9.00	8.00
PER BUNDLE	Sections	-	-
	0.5		
	SqFt	-	-
SOLDIER LNFT PER	Section	-	-
	Layer	-	-
	Bundle	-	-
	SqFt	0.85	_
	Section	0.03	
SAILOR LNFT PER	Layer	8.86	-
	Bundle	79.72	-
	SqFt	-	0.39
UNITS PER	Section	-	-
	Bundle	72.00	192.00

COLORS	Reflectance	Stock	Stock
Sabia	SR n/a SRI n/a	/	1
Scuro	SR n/a SRI n/a	/	1

Layer

Section Bundle

LBS PER



306.24

2,450

COMMERCIAL







SQUARE 360 x 360 x 60mm 14 ½ x 14 ½ x 2 3/6" 27 units/Bundle



Single Unit



287

2,583

HEX200 x 200 x 70mm
7% x 7 % x 23/4"
192 units/Bundle
.42 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

3-Unit Random Bundle















APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color





Factory sealed to provide integral stain resistance

COLORFUSION™

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



HexPaver A

Bundle Type		SINGLE
Plant Produced	MARENGO	MARENGO
Thickness (mm)	60 MM	70 MM
Bundle	108.31	73.92
Layer	10.83	9.24
Section	-	-
Stone	0.45	0.39
Layers	10.00	8.00
Sections	-	-
SqFt	-	-
Section	-	-
Layer	-	-
Bundle	-	-
SqFt	-	-
Section	-	-
Layer	-	-
Bundle	-	-
SqFt	2.22	2.60
Layer	24	24
Bundle	240.00	192.00
Layer	276	306
Section	-	-
Bundle	2,762	2,450
	Plant Produced Thickness (mm) Bundle Layer Section Stone Layers Sections SqFt Section Layer Bundle SqFt Section Layer Bundle SqFt Layer Bundle Layer Bundle Layer Section Layer Section Layer Section Layer Section Layer Section SqFt Layer Section SqFt Layer Section SqFt Section SqFt Section SqFt Section SqFt Section SqFt SqFt SqFt SqFt SqFt SqFt SqFt SqFt	Plant Produced MARENGO Thickness (mm) 60 MM Bundle 108.31 Layer 10.83 Section - Stone 0.45 Layers 10.00 Sections - SqFt - Section - Layer - Bundle - SqFt - Section - Layer - Bundle - Layer 24 Bundle 240.00 Layer 276 Section -

COLORS	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	SO
Midnight Sky	SR .17 SRI 15	✓	SO
Winter Marvel	SR .35 SRI 38	✓	SO







COMMERCIAL

Single Unit



205 x 205 x 60mm $8 \times 8 \times 2^{3/8}$ " 240 Units/Bundle .45 SqFt/Stone



200 x 200 x 70mm $7\% \times 7\% \times 2\%$ 192 Units/Bundle .39 SqFt/Stone







APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


LAYING PATTERNS



Hollandstone 4x8 RB_B



Hollandstone 4x8 HB_C



Hollandstone 4x8 BW_D

	4 x 8
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

	Bundle	118.00
SOUT DED	Layer	11.80
SQFT PER	Section	19.67
	Stone	0.22

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	6.00

		SqFt	1.50
s	SOLDIER LNFT PER	Section	29.53
	SOLDIER LINFT PER	Layer	17.72
		Bundle	177.17

	SqFt	3.00
SAILOR LNFT PER	Section	59.06
SAILOR LINFT PER	Layer	35.43
	Bundle	354.33

	SqFt	4.58
UNITS PER	Section	90.00
	Bundle	540.00

	Layer	323
LBS PER	Section	538
	Bundle	3,229

COLORS	Reflectance	Stock
Autumn Red	SR n/a SRI n/a	✓
Charcoal	SR .12 SRI 9	✓
River	SR .32 SRI 34	✓
Sierra	SR n/a SRI n/a	/







COMMERCIAL

Single Unit



STANDARD 100 x 200 x 60mm 3 % x 7 % x 2 3/6" 540 units/Bundle .22 Sq.Ft./Stone

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section Stone

Layers

Sections

SqFt Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section

Bundle

Layer

Section Bundle

Reflectance

Please contact your local Sales Representative for color options.

SR n/a SRI n/a

SQFT PER

PER BUNDLE

SOLDIER LNFT PER

SAILOR LNFT PER

UNITS PER

LBS PER

COLORS

Custom Colors & Finishes

4 x 8

SINGLE

82.60

11.80

0.22

7.00

1.50

17.71

124.00

3.00

35.43

248.03

4.58

378.00

429

3,005

Stock

MULTI-PLANT 80 MM **HERRINGBONE**

SINGLE MULTI-PLANT

80 MM

82.60

11.80

0.22

7.00

4.58

378.00

423

2,963

Stock

SO



APPLICATIONS









APPEARANCE

Edge Detail - Chamfer Surface Texture - Smooth / Series Exposed Umbriano Mottled / II Campo Brushed Joint Spacing - 3 mm

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano°)



Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano°)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Hollandstone 4x8 RB_B



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES" Exposed Granite Finish



CONTRACTORS

SMOOTH Premier Finish



COMMERCIAL

UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

Single Unit



STANDARD 100 x 200 x 80mm 3 1/8 x 7 1/8 x 3 1/8" 378 units/Bundle .22 Sq.Ft./Stone





RECTANGLE 100 x 200 x 80mm 3 1/8 x 7 1/8 x 3 1/8" 350 Units/Bundle



SMALL UNIT 100 x 200 x 80mm 3 1/8 x 3 1/8 x 3 1/8" 56 Units/Bundle









APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


LAYING PATTERNS



Holland Premier 4x8 RB_B



Holland Premier 4x8 HB_C



Holland Premier 4x8 BW_D

	4 x 8
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

	Bundle	118.00
SQFT PER	Layer	11.80
SQFIFER	Section	-
	Stone	0.22

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-

	SqFt	1.50
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	17.72
	Bundle	177.17

	SqFt	3.00
SAILOR LNFT PER	Section	-
SAILOR LIFT PER	Layer	35.43
	Bundle	354.33

	SqFt	4.58
UNITS PER	Section	-
	Bundle	540.00

	Layer	327
LBS PER	Section	-
	Bundle	3.270

COLORS	Reflectance	Stock
Charleston	SR n/a SRI 36	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite	SR n/a SRI n/a	✓
Heritage Brown	SR n/a SRI n/a	✓
Ivory	SR n/a SRI n/a	✓
River	SR .22 SRI 19	✓
Sierra	SR n/a SRI n/a	/







COMMERCIAL





STANDARD 100 x 200 x 60mm 3 % x 7 % x 2 3/6" 540 units/Bundle .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.









APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color


ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



nttoni RB_A	Mattoni HB_C

		SMOOTH
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM
	Bundle	111.60
	Layer	11.16
SQFT PER	Section	-
	Stone	0.16
	Lavors	10.00
PER BUNDLE	Layers Sections	10.00
	Sections	-
	SqFt	1.27
SOLDIER LNFT PER	Section	-
SOLDIER LNF1 PER	Layer	14.17
	Bundle	141.73
	SqFt	5.08
	Section	-
SAILOR LNFT PER	Layer	56.69
	Bundle	566.92
	SqFt	6.45
UNITS PER	Section	- 0.40
J. J. L. K	Bundle	720.00
		1
	Layer	306
LBS PER	Section	-
	Bundle	3,062

COLORS	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI 29	√
Sable	SR n/a SRI n/a	✓





CONTRACTORS

COMMERCIAL

Single Unit



STANDARD 60 x 240 x 60mm $2\frac{3}{8} \times 9\frac{1}{2} \times 2\frac{3}{8}$ " 720 Units/Bundle .16 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Limestone Slabs



		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type		SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 MM	22 MM	22 MM	22 MM
SQFT PER	Crate	180.00	186.00	160.00	180.00
	Units	2.00	3.00	4.00	6.00
LIMITE DED	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
	Crate	2,149	2,221	1,910	2,149

COLORS Reflectance Stock Stock Stock Black River SR n/a SRI n/a ✓ ✓ ✓ ✓ ✓

APPLICATIONS



APPEARANCE

Edge Detail - Sawn Edge Surface Texture - Riven

TECHNICAL INFORMATION

More information is available online.





CONTRACTORS

COMMERCIAL

LAYING PATTERNS



Pattern 12x24 RB A Pattern 24x24 RB B Pattern Multi-Unit C





12 x 24 300 x 600 x 22mm 11 % x 23 % x %" 2.0 Sq.Ft./Stone 90 units/Crate



18 x 24 450 x 600 x 22mm 17 ¾ x 23 % x %" 3.0 Sq.Ft./Stone 62 units/Crate



24 x 24 600 x 600 x 22mm 23 % x 23 % x %" 4.0 Sq.Ft./Stone 40 units/Crate



24 x 36 600 x 900 x 22mm 23 % x 35 ½ x %" 6.0 Sq.Ft./Stone 30 units/Crate

Notes: **SOLD IN FULL CRATES ONLY.** Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. Please see important notice on page 94 regarding installation practices. Important: Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurement are nominal. Product is not intended for vehicular applications.

Natural Stone - Limestone Steps, Coping and Pillar Cap



		48 x 12 ROCK FACED COPING	48 x 14 ROCK FACED COPING	24 x 24 ROCK FACED PILLAR CAP	28 x 28 ROCK FACED PILLAR CAP
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 MM	50 MM	64 MM	64 MM
UNITE DED	Crate	20.00	20.00	14.00	12.00
UNITS PER	SqFt	-	-	-	-
LBS PER	Unit	106	128	186	200
	Crate	2,122	2,552	2,606	2,402

C	OLORS	Reflectance	Stock	Stock	Stock	Stock
В	Black River	SR n/a SRI n/a	1	1	1	1

APPLICATIONS









APPEARANCE

Edge Detail - Rock Faced Surface Texture - Riven

TECHNICAL INFORMATION

More information is available online.

		48 x 16 STEP
	Bundle Type	SINGLE
	Thickness (mm)	150 MM
FCFT PER	Crate	32.00

		20.00
FCFT PER	Crate	32.00
LNFT PER	Crate	24.00
UNITS PER	Crate	6.00

LBS PER	Unit	421
LDS PER	Crate	2,526

COLORS	Stock
Black River	✓







COMMERCIAL

48 Step

48 x 16 STEP 1,200 x 150 x 400mm 47 1/4 x 5 7/8 x 15 3/4" 6 units/Crate

Pillar Cap



24" PILLAR CAP 600 x 600 x 64mm 23 % x 23 % x 2 5% " 14 units/Crate 28" PILLAR CAP 710 x 710 x 64mm 28 x 28 x 25%" 12 units/Crate

Coping



48 x 12 ROCK FACE 1,200 x 300 x 50mm 47 1/4 x 11 1/8 x 2" 20 units/Crate

48 x 14 ROCK FACE 1,200 x 344 x 50mm 47 1/4 x 13 5/8 x 2" 20 units/Crate

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealers for natural stone. All measurements are nominal. Product is not intended for vehicular applications.

Natural Stone - Sandstone Slabs



		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 MM	22 MM	22 MM	22 MM
SQFT PER	Crate	180.00	186.00	160.00	180.00
SUFIFER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
	Unit	24	36	48	72

APPLICATIONS



APPEARANCE

Edge Detail

Sawn Edge (Golden Sand, Greyfield and Ivory Sand) Rock Faced (Autumn Harvest and Stone Cliff Grey)

Surface Texture
Brushed (Golden Sand, Greyfield and Ivory Sand)
Riven (Autumn Harvest and Stone Cliff Grey)

TECHNICAL INFORMATION

More information is available online.

COLORS	Reflectance	Stock	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	/	1	/	1
Golden Sand	SR n/a SRI n/a	/	/	/	/
Ivory Sand	SR n/a SRI n/a	/	/	/	/
Stone Cliff Grey	SR n/a SRI n/a	/	1	/	/
Greyfield	SR n/a SRI n/a	/	/	/	/

2,149



2,221

1,910



2,149


CONTRACTORS

COMMERCIAL


LAYING PATTERNS



NaturalStone 12x24 RB A



NaturalStone 24x24 RB B



LBS PER

Crate

NaturalStone Multi-Unit C



12 x 24 300 x 600 x 22mm 11% x 23 % x 7/6" 90 units/Crate 2.0 Sq.Ft./Stone



18 x 24 450 x 600 x 22mm 17 ³/₄ x 23 ⁵/₈ x ⁷/₈" 62 units/Crate 3.0 Sq.Ft./Stone



24 x 24 600 x 600 x 22mm 23 5% x 23 5% x 7%" 40 units/Crate 4.0 Sq.Ft./Stone



24 x 36 600 x 900 x 22mm 23 % x 35 ½ x %" 30 units/Crate 6.0 Sq.Ft./Stone

Notes: **SOLD IN FULL CRATES ONLY. This product** is **not intended for vehicular applications**. Unilock offers adjustable pedestals. ** Product is only available to dealers. ** Please see important notice on page 94 regarding installation practices. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

Natural Stone - Sandstone Steps, Coping and Pillar Cap



APPLICATIONS









COLORS Stock Ivory Sand S0

Bundle Type

Thickness (mm)

Crate

Crate

Crate

Unit

Crate

APPEARANCE

Edge Detail - Rock Faced

Surface Texture
Brushed (Golden Sand, Greyfield
and Ivory Sand)
Riven (Stone Cliff Grey)

TECHNICAL INFORMATION

More information is available online.

		48 x 12 4' FULLNOSE COPING	48 x 12 4' ROCK FACED COPING	48 x 14 4' ROCK FACED COPING	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP
Bundle Type		SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Thickness (mm)		50 MM	50 MM	50 MM	65 MM	65 MM
UNITS PER	Crate	20.00	20.00	20.00	14.00	12.00
UNITS PER	SqFt		-	-	-	-
LDCDED	Unit	106	106	128	186	200
LBS PER	Crate	2,116	2,122	2,552	2,606	2,402

FCFT PER

LNFT PER

UNITS PER

LBS PER

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Golden Sand	SR n/a SRI n/a	✓	✓	-	S0	S0
Greyfield	SR n/a SRI n/a	1	1	-	-	-
Ivory Sand	SR n/a SRI n/a	1	1	-	✓	S0
Stone Cliff Grey	SR n/a SRI n/a	✓	✓	✓	✓	1



24 x 24 PILLAR CAP 600 x 600 x 65mm 23 % x 23 % x 2 %" 14 units/Crate



28 x 28 PILLAR CAP 725 x 725 x 65mm 28 5% x 28 5% x 2 5%" 12 units/Crate



CONTRACTORS



48 x 16 STEP SINGLE

150 MM

32.00

24.00

6.00

421

2,526

COMMERCIAL



48 x 16 STEP 1,200 x 150 x 400mm 47 1/4 x 5 1/8 x 15 3/4" 6 units/Crate Ivory Sand Only SPECIAL ORDER



4' FULLNOSE 48 x 12 1,200 x 50 x 300mm 47 1/4 x 2 x 11 1/8 " 20 units/Crate



4' ROCK FACE 48 x 12 1,200 x 50 x 300mm 47 1/4 x 2 x 11 7/8" 20 units/Crate



4' ROCK FACE 48 x 14 1,200 x 50 x 350mm 47 1/4 x 2 x 13 %" 20 units/Crate Stone Cliff Grey Only

Pillar Caps

Nordic Cobble[™] **⊘**





APPLICATIONS









APPEARANCE

Edge Detail - Zero Surface Texture - Textured

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS

#	Ħ	#





 $NordicCobble_A$

NordicCobble_Fan

 $NordicCobble_Circle$

	PREMIER
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

	Bundle	98.25
COLT DED	Layer	9.83
SQFT PER	Section	-
	Stone	0.09

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-

	SqFt	3.39
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	33.31
	Bundle	333.07

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

	SqFt	10.99
UNITS PER	Section	-
	Bundle	1,080

	Layer	230.00
LBS PER	Section	-
	Bundle	2,300

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	✓
Granite Fusion	SR n/a SRI n/a	✓
Opal	SR n/a SRI n/a	✓



COMMERCIAL

Single Unit



STANDARD 89.9 x 94 x 60mm 3 % x 3 ¾ x 2 ¾ " 1,080 units/Bundle .09 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.













APPEARANCE

Edge Detail - Chamfer Surface Texture - Custom (see below) Umbriano Mottled / II Campo Brushed Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)

Factory sealed to provide integral stain resistance


COLOR FUSION™ (Umbriano)

Subtly mottled color finish


TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS







	ALL FINISHES
Bundle Type	SINGLE
Plant Produced	MULTI-PLANT
Thickness (mm)	80 MM

	Bundle	77.33
COET DED	Layer	9.67
SQFT PER	Section	-
	Stone	0.54

PER BUNDLE	Layers	8.00
	Sections	-

SOLDIER LNFT PER	SqFt	1.59
	Section	-
	Layer	15.35
	Bundle	122.83

SAILOR LNFT PER	SqFt	1.59
	Section	-
	Layer	15.35
	Bundle	122.83

	SqFt	1.86	
UNITS PER	Section	-	
	Bundle	144.00	

LBS PER	Layer	350
	Section	-
	Bundle	2,801

COLORS	Reflectance	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO
Please contact your local Sales Representative for color options.		





CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES™ Exposed Granite Finish



HTOOMS Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

Single Unit



STANDARD 260 x 260 x 80mm 10 $\frac{1}{4}$ x 10 $\frac{1}{4}$ x 3 $\frac{1}{8}$ " 144 units/Bundle .54 Sq.Ft./Stone










APPEARANCE

Surface Texture - Stone Finish

TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS









Porcelain 24x24 SB_B

		DEL CONCA SQUARE PRESSED EDGE	DEL CONCA COPING
	Bundle Type	SINGLE	SINGLE
	Thickness (mm)	20 MM	30 MM
		I	
	Crate	248.00	-
SQFT PER	Box	7.75	-
	Unit	3.88	-
	Box	32.00	38.00
PER CRATE	SqFt	248.00	-
	Unit	64.00	38.00
UNITS PER	Crate	64.00	38.00
ONITOT EX	Box	2.00	1.00
	Unit	36	30
LBS PER	SqFt	9	-
LDSFLK	Вох	72	30
	Crate	2,288	1,127

COLORS	Reflectance	Stock	Stock
Chamonix Bianco	SR n/a SRI n/a	/	-
Chamonix Grey	SR n/a SRI n/a	/	-
Gotham Grey	SR n/a SRI n/a	/	/
Gotham Nero	SR n/a SRI n/a	/	-
New England White	SR n/a SRI n/a	/	-
New England Ivory	SR n/a SRI n/a	/	-
New England Cold Gray	SR n/a SRI n/a	/	-
Travstone Beige	SR n/a SRI n/a	/	/







COMMERCIAL







DEL CONCA COPING 330 x 600 x 30mm 13 x 23 5/8 x 1 1/4" 38 Units/Crate

Notes: SOLD IN FULL CRATES ONLY. Porcelain tile is available for purchase by Unilock Authorized Dealers only. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.










APPEARANCE

Surface Texture - Woodgrain Finish (DelConca) & Stone Finish

TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS







Porcelain 16x32 HB_D

		DEL CONCA RECTANGLE PRESSED EDGE	UNILOCK RECTANGLE PRESSED EDGE
	Bundle Type	SINGLE	SINGLE
	Thickness (mm)	20 MM	20 MM
	Pallet	165.36	186.00
SOET DED			6.89
SQFT PER	Box	6.89	
	Unit	3.45	3.44
	Вох	24.00	27.00
PER PALLET	SqFt	165.36	186.00
	Unit	48.00	54.00
UNITS PER	Pallet	48.00	54.00
OMITOT EN	Box	2.00	2.00
	Unit	32	32
	SqFt	9	9
LBS PER	Box	64	64
	Pallet	1.538	1.726

COLORS	Reflectance	Stock	Stock
Cosmic Grey	SR n/a SRI n/a	-	✓
Dove Grey Travertine	SR n/a SRI n/a	-	✓
New England White	SR n/a SRI n/a	✓	-
New England Ivory	SR n/a SRI n/a	✓	-
New England Cold Gray	SR n/a SRI n/a	✓	-
Quartzite Dark Gray	SR n/a SRI n/a	/	-
Quartzite Sand	SR n/a SRI n/a	/	-







COMMERCIAL

Single Unit



DEL CONCA RECTANGLE 400 x 800 x 20mm 15 ¾ x 31 ½ x %"

3.45 Sq.Ft./Stone 48 Units/Crate



UNILOCK RECTANGLE

400 x 800 x 20mm 15 34 x 31 ½ x %" 3.44 Sq.Ft./Stone 54 Units/Crate

Notes: **SOLD IN FULL CRATES ONLY.** Porcelain tile is available for purchase by Unilock Authorized Dealers only. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

Porcelain Modular Bundle





APPLICATIONS



APPEARANCE


Surface Texture - Stone Finish

TECHNICAL INFORMATION

More information is available online.

LAYING PATTERNS





Porcelain Fixed Random_G

Porcelain Fixed Random_H

	DEL CONCA MODULAR BUNDLE
Bundle Type	RANDOM
Thickness (mm)	20 MM

	Pallet	434.00
SQFT PER	Box	-
	Unit	-

	Box	-
PER PALLET	SqFt	-
	Unit	-

LINITS PER	Pallet	192
UNITS PER	Box	-

LBS PER	Unit	-
	SqFt	-
	Box	-
	Pallet	3,973

COLORS	Reflectance	Stock
Travstone Beige	SR n/a SRI n/a	/





CONTRACTORS

COMMERCIAL







12 x 24 300 x 600 x 20mm 11 % x 23 % x %" 64 units/124 Sq.Ft.



24 x 24 600 x 600 x 20mm 23 5% x 23 5% x 7%" 64 units/248 Sq.Ft.

Notes: **SOLD IN FULL CRATES ONLY.** All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.**

Modular Bundle











APPEARANCE

Edge Detail - Rounded Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 4 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)



Factory sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERN



Promenade Multi-Unit Random G

		6 x 24	6 x 24
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	70 MM	150 MM
	Bundle	93.00	46.50
		11.62	11.63
SQFT PER	Layer	11.02	11.03
	Section	-	-
	Stone	0.97	0.97
DED DUNDLE	Layers	8.00	4.00
PER BUNDLE	Sections	-	-
	SqFt	0.51	0.51
	Section	-	-
SOLDIER LNFT PER	Layer	-	5.91
	Bundle	47.24	23.62
	SqFt	2.03	2.03
	Section	-	-
SAILOR LNFT PER	Layer	23.63	23.62
	Bundle	-	94.49
	SqFt	1.03	1.03
UNITS PER	Section	-	-
	Bundle	96.00	48.00
	Layer	372	798
LBS PER	Section	-	-
	Bundle	2,978	3,192
	SqFt Section Bundle Layer Section	1.03 - 96.00 372	1.0 48.0 79

	COLORS	Reflectance	Stock	Stock
	Custom Colors & Finishes	SR n/a SRI n/a	SO	SO
Please contact your local Sales Representative for color options.				



COMMERCIAL



CLASSIC Thrumix Finish



Brushed Finish



Exposed Granite Finish



Premier Finish



Mottled Finish with/ ColorFusion and EasyClean

Single Units



6 x 24 150 x 600 x 70mm 5 % x 23 5/8 x 2 3/4" 72 units/Bundle 1.29 Sq.Ft./Stone



6 x 24 150 x 600 x 150mm 5 1/8 x 23 5/8 x 5 7/8" 48 units/Bundle .97 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

CLASSIC / ENDURACOLOR



APPLICATIONS









APPEARANCE

Edge Detail - Rounded Surface Texture - Multi-Finish Available Joint Spacing - 4 mm

TECHNOLOGIES CLASSIC

Budget-friendly traditional product mix


$\textbf{ENDURACOLOR}^{\text{\tiny{TM}}}$

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



		3 x 12	4 x 12	4 x 16	8 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	100 MM	100 MM	100 MM	100 MM
	Bundle	63.94	58.13	51.67	51.67
COLL DED	Layer	10.66	11.63	10.33	10.33
SQFT PER	Section	-	-	-	-
	Stone	0.24	0.32	0.43	1.29
DED DUNDI E	Layers	6.00	5.00	5.00	5.00
PER BUNDLE	Sections	-	-	-	-
	SqFt	1.35	1.02	0.76	0.51
SOLDIER	Section	-	-	-	-
LNFT PER	Layer	14.44	11.81	7.87	5.25
	Bundle	86.61	59.06	39.37	26.25
	SqFt	4.06	3.05	3.05	1.52
SAILOR	Section	-	-	-	-
LNFT PER	Layer	43.31	35.43	31.50	15.75
	Bundle	259.84	177.17	157.48	78.74
	SqFt	4.13	3.10	2.32	0.77
UNITS PER	Section	-	-	-	-
	Bundle	264.00	180.00	120.00	40.00
	Layer	465	532	469	483
LBS PER	Section	-	-	-	-
	Bundle	2,789	2,659	2,345	2,414
COLORS	Reflectance	Stock	Stock	Stock	Stock
Custom Colors & Finishes	SR n/a SRI n/a	S0	SO	S0	S0
Please contact your local Sales Representative for color options.					



COMMERCIAL



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES™ Exposed Granite Finish



SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



3 x 12 75 x 300 x 100mm 3 x 11 % x 3 %" 264 units/Bundle .24 Sq.Ft./Stone



4 x 12 100 x 300 x 100mm 3 % x 11 % x 3 %" 180 units/Bundle .32 Sq.Ft./Stone



4 x 16 100 x 400 x 100mm 3 % x 15 % x 3 %" 120 units/Bundle .43 Sq.Ft./Stone



8 x 24 200 x 600 x 100mm 7 % x 23 % x 3 %" 40 units/Bundle 1.29 Sq.Ft./Stone

Notes: Special Order – Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

Single Units













APPEARANCE

Surface Texture - Textured Joint Spacing - 10 mm

TECHNOLOGIES ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance

REALA™

Cast from natural stone

ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Richcliff Fixed Random A



Richcliff Fixed Random B



Richcliff LargeRec HB_H

		LARGE RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	AYR	AYR
Thickness (mm)	60 MM	60 MM
D dl -	00.20	00.00

	Bundle	90.30	82.39
SOET DED	Layer	11.29	10.30
SQFT PER	Section	-	-
	Stone	-	1.72

PER BUNDI E	Layers	8.00	8.00
PER BUNDLE	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.58
	Section	-	-
	Layer	-	5.94
	Bundle	-	47.56

SAILOR LNFT PER	SqFt	1.31	1.01
	Section	-	-
	Layer	14.78	10.39
	Bundle	118.22	83.15

	SqFt	-	0.58
UNITS PER	Section	-	-
	Bundle	160.00	48.00

	Layer	309	301
LBS PER	Section	-	-
	Bundle	2,472	2,411

COLORS	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	/	✓ /
Pebble Taupe	SR n/a SRI n/a	/	1
Smoke Shale	SR n/a SRI n/a	/	1



CONTRACTORS



COMMERCIAL



RECTANGLE 226 x 300 x 60mm 8 % x 11 % x 2 %" 64 Units/Bundle .75 SqFt/Stone



SQUARE 226 x 226 x 60mm $8\% \times 8\% \times 2\%$ " 32 units/Bundle .58 Sq.Ft./Stone



SMALL RECTANGLE 150 x 226 x 60mm $5\% \times 8\% \times 2\%$ " 64 units/Bundle .38 Sq.Ft./Stone



Single Unit

LARGE RECTANGLE 302 x 528 x 60mm $11\% \times 20\% \times 23\%$ 48 units/Bundle 1.72 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.









APPEARANCE

Edge Detail - Chamfer Surface Texture - Series Exposed Joint Spacing - 3 mm


TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



		4 x 8
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM
	Bundle	117.90
	Layer	11.79
SQFT PER	Section	19.67
	Stone	0.22
	Layers	10.00
PER BUNDLE	Sections	6.00
	COULOTIO	0.00
	SqFt	1.50
SOLDIER LNFT PER	Section	29.53
SOLDILK LNI I FLK	Layer	17.72
	Bundle	177.17
	SqFt	3.01
	Section	59.06
SAILOR LNFT PER	Layer	35.43
	Bundle	354.33
	SqFt	4.58
UNITS PER	Section	90.00
	Bundle	540.00
	1 .	1
	Layer	306
LBS PER	Section	511
	Bundle	3,065
COLORS	Reflectance	Stock

SR n/a SRI n/a

SR n/a SRI n/a





CONTRACTORS

COMMERCIAL

Single Unit



4 x 8 100 x 200 x 60mm 3 % x 7 % x 2 3/8" 540 units/Bundle .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Golden Tan

Onyx Black













APPEARANCE

Edge Detail - Chamfer Surface Texture - Series Exposed Joint Spacing - 3 mm

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS







Series 4x12_RB_L Series 4x12_HB_M

Series 4x12_DHB_N

	4 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46

	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00

	Layer	426
LBS PER	Section	-
	Bundle	3,404

COLORS	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Nordic Star	SR n/a SRI n/a	✓





CONTRACTORS

COMMERCIAL

Single Unit



4 x 12 100 x300 x 80mm 3 % x 11 % x 3 %" 288 units/Bundle .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.









APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 2 mm


TECHNOLOGIES ENDURACOLOR™


Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

LAYING PATTERNS





Skyline 24x24_SB_A Skyline 24x24_RB_B

	24 x 24
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	50 MM

SQFT PER	Bundle	80.00
	Layer	8.00
	Section	-
	Stone	4.00

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

SAILOR LNFT PER	SqFt	0.50	
	Section	-	
	SAILOR LIFT FER	Layer	4.00
		Bundle	40.00

	SqFt	0.25
UNITS PER	Section	-
	Bundle	20.00

	Layer	183
LBS PER	Section	-
	Bundle	1,833

COLORS	Reflectance	Stock
Chamois	SR. 41 SRI 46	✓
Silver Grey	SR n/a SRI n/a	✓





CONTRACTORS

COMMERCIAL





24 x 24 606 x 606 x 50mm 23 % x 23 % x 2" 20 units/Bundle 4.00 Sq.Ft./Stone



PEDESTAL SYSTEMContact your local Unilock Rep for more information.

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **This product is not intended for vehicular applications**. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and

availability. All measurements are nominal.









APPEARANCE

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm

TECHNOLOGIES

$\textbf{ENDURACOLOR}^{\text{\tiny{TM}}}$

Refined surface and long-lasting color

EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance


$\textbf{COMFORT STEP}^{\text{\tiny{TM}}}$

Ultra smooth surface texture

TECHNICAL INFORMATION

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

LAYING PATTERNS



Soreno 16x32 RB_A

	16 x 32	SHOT BLAST
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	50 MM	50 MM

SQFT PER	Bundle	64.27	64.27
	Layer	3.57	3.57
	Section	-	-
	Stone	3.57	3.57

PER BUNDLE	Layers	18.00	18.00
PER BUNDLE	Sections	-	-

	SOLDIER LNFT PER	SqFt	0.37	0.38
		Section	-	-
		Layer	1.34	1.34
		Bundle	24.04	24.12

SAILOR LNFT PER	SqFt	0.75	0.75
	Section	-	-
SAILUR LINFT PER	Layer	2.67	2.67
	Bundle	48.13	48.06

	SqFt	0.28	0.28
UNITS PER	Section	-	-
	Bundle	18.00	18.00

	Layer	86	86
LBS PER	Section	-	-
	Bundle	1,549	1,549

COLORS	Reflectance	Stock	Stock
Light Granite	SR n/a SRI 50	✓	-
Toscana Beige	SR n/a SRI 77	/	-
Dark Charcoal	SR n/a SRI n/a	-	✓



CONTRACTORS

Single Units



16 x 32 407 x 815 x 50mm 16 x 32 x 2" 18 units/Bundle 3.57 Sq.Ft./Stone



PEDESTAL SYSTEM Contact your local Unilock Rep for more information.

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements

are nominal. Contact Unilock for more information.













APPEARANCE

Edge Detail - n/a Surface Texture - Textured Joint Spacing - 10 mm Void - 6.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™ 🕕



Factory sealed to provide integral stain resistance

REALA™

Cast from historical brick


ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Town Hall 4x10 DHB_B Town Hall 4x10 HB_B

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	70 MM
	Bundle	88.41
SQFT PER	Layer	11.05
OQITIEN	Section	-
	Stone	0.28
PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.19
SOLDIER LNFT PER	Section	-
SOLDIER LIFT PER	Layer	13.12
	Bundle	104.99
	SqFt	2.97
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	32.81
	Bundle	262.47
	SqFt	3.62
UNITS PER	Section	-
	Bundle	320.00
	Layer	361
LBS PER	Section	-
	Bundle	2,888

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓
Burgundy Red	SR n/a SRI n/a	✓
Burnt Clay	SR n/a SRI n/a	1
Old Oak	SR n/a SRI n/a	1





CONTRACTORS

COMMERCIAL





STANDARD 250 x 100 x 70mm 9 1/8 x 3 1/8 x 2 3/4" 320 units/Bundle .28 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.















APPEARANCE

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7mm Void - 5.5%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Treo Fixed Random_R Treo Fixed Random_S

	SMOOTH
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	108.99
	Layer	10.90
	Section	-
	Stone	-

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-

	SqFt	-	
SOLDIER LNFT PER	Section	-	
SOLDIER LINFT PER	Layer	-	
	Bundle	-	

CAN OR LINET DED	SqFt	1.35	
	Section	-	
	SAILOR LNFT PER	Layer	14.76
		Bundle	147.64

	SqFt	-
UNITS PER	Section	-
	Bundle	210.00

	Layer	295
LBS PER	Section	-
	Bundle	2,949

1	COLORS	Reflectance	Stock
	Granite	SR n/a SRI n/a	✓
	River	SR n/a SRI n/a	✓
	Sierra	SR n/a SRI n/a	✓
	Tuscany	SR n/a SRI n/a	/





CONTRACTORS

COMMERCIAL

Random Bundle



LARGE RECTANGLE 225 x 337.5 x 60mm 8 % x 13 % x 2 %" 60 units/Bundle .82 Sq.Ft./Stone



SQUARE 225 x 225 x 60mm 8 1/8 x 8 1/8 x 2 3/8" 70 units/Bundle .55 Sq.Ft./Stone



SMALL RECTANGLE 112.5 x 225 x 60mm 4 ½ x 8 % x 2 3/8" 80 units/Bundle .27 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.













APPEARANCE

Edge Detail - Micro Surface Texture - Series Exposed Textured Joint Spacing - 10mm Void - 5.6%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Tribeca Cobble Fixed Random_A

	SERIES EXPOSED TEXTURED
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	70 MM

	Bundle	97.53
SQFT PER	Layer	12.19
SUFIFER	Section	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-	
	Section	-	
	SOLDIER ENFI PER	Layer	-
		Bundle	-

	SqFt	2.34
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	28.49
	Bundle	227.95

	SqFt	-
UNITS PER	Section	-
	Bundle	304.00

	Layer	378
LBS PER	Section	-
	Bundle	3,022

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	✓
Peppered Granite	SR .38 SRI 42	✓







COMMERCIAL

Random Bundle



LARGE RECTANGLE 130 x 305 x 70mm 5 x 12 x 2 ¾" 88 units/Bundle .43 Sq.Ft./Stone



RECTANGLE 130 x 230 x 70mm 5 x 9 x 2 ¾" 88 units/Bundle .32 Sq.Ft./Stone



SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 1/8 x 2 3/4" 128 units/Bundle .25 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.















APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm Void - 40%

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through


CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Turfstone A

	SMOOTH
Bundle Type	SINGLE
Plant Produced	CHICAGO/ ELKHORN
Thickness (mm)	80 MM

SQFT PER	Bundle	80.00
	Layer	10.00
	Section	-
	Stone	2.50

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

	SqFt	0.40
UNITS PER	Section	-
	Bundle	32.00

	Layer	249
LBS PER	Section	-
	Bundle	1,995

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO

Single Unit



LARGE RECTANGLE 400 x 600 x 80mm 15 ¾ x 23 ½ x 3 ½" 32 units/Bundle 2.50 Sq.Ft./Stone





			XL	4 x 8	8 x 16
	Bundle Type	RANDOM	SINGLE	SINGLE	SINGLE
	Plant Produced	MARENGO	MARENGO	MARENGO	GEORGETOWN
	Thickness (mm)	60 MM	60 MM	60 MM	70 MM
	Bundle	116.57	116.57	118.00	82.67
COLT DED	Layer	11.66	11.66	11.80	10.33
SQFT PER	Section	-	-	-	-
	Stone	-	5.83	0.22	0.86

PER BUNDI E	Layers	10.00	10.00	10.00	8.00
PER BUNDLE	Sections	-	-	-	-

	SqFt	-	0.32	1.50	0.76
SOLDIER	Section	-	-	-	-
LNFT PER	Layer	-	3.74	17.72	7.87
	Bundle	-	37.40	159.45	62.99

	SqFt	0.80	0.53	3.00	1.52
SAILOR	Section	-	-	-	-
LNFT PER	Layer	9.35	6.23	35.43	15.75
	Bundle	93.50	62.30	318.90	125.98

	SqFt	-	0.17	4.58	1.16
UNITS PER	Section	-	-	-	-
	Bundle	80.00	20.00	540.00	96.00

	Layer	320	320	320	331	
LBS	PER	Section	-	-	-	-
		Bundle	3,199	3,199	3,201	2,647

COLORS	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓	-	S0
Grenada White	SR n/a SRI n/a	✓	✓	-	-
Midnight Sky	SR .17 SRI 15	✓	-	1	80
Summer Wheat	SR .42 SRI 48	✓	✓	-	80
Winter Marvel	SR .35 SRI 38	✓	-	-	S0



200 x 400 x 70mm 7 1/8 x 15 3/4 x 2 3/4" 96 units/Bundle .86 Sq.Ft./Stone

Single Units



CONTRACTORS



COMMERCIAL

APPLICATIONS







APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ 🕕

Factory sealed to provide integral stain resistance


COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Umbriano Fixed Random_A



LARGE RECTANGLE 380 x 570 x 60mm

15 x 22 ½ x 2 3/8" 20 units/Bundle 2.331 Sq.Ft./Stone

SQUARE

380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.554 Sq.Ft./Stone

SMALL RECTANGLE

Single Unit

190 x 380 x 60mm $7\frac{1}{2} \times 15 \times 2\frac{3}{8}$ " 30 units/Bundle .77 Sq.Ft./Stone



570 x 950 x 60mm 22 ½x 37 ½ x 2 3/8" 20 units/Bundle 5.83 Sq.Ft./Stone



4 x 8 100 x 200 x 60mm 4 x 8 x 2 3/8" 540 units/Bundle

.22 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Only the 8x16 is approved for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Umbriano® 80mm







APPLICATIONS











APPEARANCE

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ 🕕



Factory sealed to provide integral stain resistance


COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Umbriano 4x12 HB_1 Umbriano 4x12 RB_H

	4 x 12
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	80 MM
t-	

SQFT PER	Bundle	93.04
	Layer	11.63
	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

	SAILOR LNFT PER	SqFt	3.05	
		Section	-	
		Layer	35.43	
			Bun	Bundle

	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00

LBS PER	Layer	426
	Section	-
	Rundle	3 404

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	✓
Midnight Sky	SR .17 SRI 15	/
Winter Marvel	SR .35 SRI 38	/





CONTRACTORS

COMMERCIAL



4 x 12 100 x 300 x 80mm $3\% \times 11\% \times 3\%$ 288 units/Bundle .32 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



		RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	ELKHORN	ELKHORN
Thickness (mm)	70 MM	70 MM
Bundle	94.19	94.19
	·	

11.77 11.77 Layer **SQFT PER** Section 0.34 Stone

PER BUNDLE	Layers	8.00	8.00
	PER BUNDLE	Sections	-

	SqFt	-	0.71
SOLDIER LNFT PER	Section	-	-
JOLDIER ENFI PER	Layer	-	8.33
	Bundle	-	66.67

		SqFt	1.24	1.42	
SAILOR LNFT PER	Section	-	-		
	SAILOR ENFT PER	Layer	14.57	16.67	
				Bundle	116.56

	SqFt	-	2.97
UNITS PER	Section	-	-
	Bundle	160.00	280.00

	Layer	372	361
LBS PER	Section	-	-
	Bundle	2,976	2,884

COLORS	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	-	✓
Granite	SR n/a SRI n/a	✓	-
River	SR n/a SRI n/a	✓	-
Sierra	SR n/a SRI n/a	/	_



APPLICATIONS





APPEARANCE

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3 mm

TECHNOLOGIES CLASSIC

Budget-friendly traditional product mix


CLASSIC COAT

Factory-sealed to protect surface texture and color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS



Westport Fixed Random_A

Westport Fixed Random_B





LARGE RECTANGLE 254x 380 x 70mm 10 x 15 x 2 ¾" 32 units/Bundle 1.01 Sq.Ft./Stone



SQUARE 254 x 254 x 70mm 10 x 10 x 2 34" 56 units/Bundle .67 Sq.Ft./Stone



RECTANGLE 127x 254 x 70mm $5 \times 10 \times 2 \frac{3}{4}$ " 72 units/Bundle .34 Sq.Ft./Stone



RECTANGLE 127x 254 x 70mm $5 \times 10 \times 2 \frac{3}{4}$ " 280 units/Bundle .34 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Random Bundle

Westport[™] Smooth



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 3 mm

TECHNOLOGIES CLASSIC

Budget-friendly traditional product mix


CLASSIC COAT

Factory-sealed to protect surface texture and color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

LAYING PATTERNS







Westport Fixed Random_B

			5 x 10
	Bundle Type	RANDOM	SINGLE
	Plant Produced	ELKHORN	ELKHORN
	Thickness (mm)	70 MM	70 MM
	Bundle	94.19	94.19
SQFT PER	Layer	11.77	11.77
	Section	-	-
	Stone	0.59	0.34
	Layers	8.00	8.00
PER BUNDLE	Sections	-	
	SqFt	-	0.71
SOLDIER LNFT PER	Section	-	-
	Layer	-	8.33
	Bundle	-	66.67
	SqFt	1.24	1.42
	Section	1.27	1.72
SAILOR LNFT PER			40.07
	Layer	14.57	16.67
	Bundle	116.56	133.33
	SqFt	1.70	2.97

	Bundle	2,976	2,884
COLORS	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	-	✓
Granite	SR n/a SRI n/a	✓	-
River	SR n/a SRI n/a	✓	-
Siorra	SD n/a SDI n/a	/	



Random Bundle

LARGE RECTANGLE 254x 380 x 70mm 10 x 15 x 2 ¾" 32 units/Bundle 1.01 Sq.Ft./Stone



SQUARE 254 x 254 x 70mm $10 \times 10 \times 2 \frac{3}{4}$ " 56 units/Bundle .67 Sq.Ft./Stone

UNITS PER

LBS PER



Section

Bundle

Layer

Section

RECTANGLE 127x 254 x 70mm 5 x 10 x 2 ¾" 72 units/Bundle .34 Sq.Ft./Stone



Single Unit

160.00

372

280.00

361



127x 254 x 70mm 5 x 10 x 2 ¾" 280 units/Bundle .34 Sq.Ft./Stone

53

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

















CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIOUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

SUNSET FIREPIT KITS

Located on page 80







	TAPERED	STANDARD
Bundle Type	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT
Thickness (mm)	100 MM	100 MM

	Bundle	36.00	32.00
FCFT PER	Layer	6.00	5.33
	Stone	0.25	0.33

PER BUNDLE	Layers	6.00	6.00
	Sections	-	4.00

LNFT PER	Bundle	108.00	96.00
LNFIPER	Unit	0.75	1.00

	SqFt	4.00	3.00
UNITS PER	Section	-	24.00
	Bundle	144.00	96.00

	Layer	488	491
LBS PER	Section	-	736
	Bundle	2,930	2,944

	COLORS	Reflectance	Stock	Stock
	Granite	SR.n/a SRI n/a	✓	-
	Limestone	SR.n/a SRI n/a	-	/
	Sandstone	SR.n/a SRI n/a	/	✓
ĺ	Sierra	SR.n/a SRI n/a	✓	/





CONTRACTORS

COMMERCIAL







STANDARD 300 x 100 x 200mm 11 % x 3 % x 7 %" 96 units/Bundle .33 Fc.Ft./Stone

Notes: SMALL TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY. Maximum height is 24" (under optimum conditions). *Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. Ledgestone**, Brussels Block* XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.

Single Units

Dura Hold[®] CLASSIC



APPLICATIONS





CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		TIE-BACK	1/2 COPING	CORNER 45°
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY	GORMLEY
	Thickness (mm)	300 MM	300 MM	300 MM
	5 "	0.00	0.00	
	Bundle	2.00	3.00	7.04
FCFT PER	Layer	2.00	3.00	7.04
	Stone	2.00	3.00	7.04
	Layers	1.00	1.00	1.00
PER BUNDLE	Sections	-	-	
				I
LNFT PER	Bundle	-	3.00	-
LW III LK	Unit	-	3.00	
	SqFt	0.50	0.33	0.14
UNITS PER	Sections	-	-	-
	Bundle	1.00	1.00	1.00
	Layer	1,660	800	1,480
LBS PER	Sections	- 1,000	-	- 1,400
	Bundle	1,660	800	1,480

COLORS	Reflectance	Stock	Stock	Stock
Natural	SR n/a SRI n/a	S0	S0	S0



COMMERCIAL



Single Units

TIE-BACK1830 x 300 x 600mm
72 x 11 % x 23 5/8"
1 unit/Bundle
2.00 Fc.Ft./Stone



1/2 COPING 915 x 300 x 600mm 36 x 11 % x 23 5%" 1 unit/Bundle 3.00 Fc.Ft./Stone



CORNER 45°1520 x 300 x 600mm
59 % x 11 % x 23 5%"
1 unit/Bundle
7.04 Fc.Ft./Stone

55

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed—end coping units are closed on both ends so that they may be used as left or right units. Tie—back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone* Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

Estate Wall[™] CLASSIC



APPLICATIONS















CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

			CORNER	COPING TAPERED
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
	Bundle	31.25	20.83	18.74
FCFT PER	Layer	6.25	4.17	2.34
	Stone	-	0.52	0.26
PER BUNDLE	Layers	5.00	5.00	8.00
FLIX DONDLL	Sections	4.00	4.00	3.00
		20.00	44.00	20.00
LNFT PER	Bundle	62.30	41.60	66.00
	Unit	1.04	1.04	0.92
	0.5		4.00	0.04
	SqFt	-	1.92	3.84
UNITS PER	Section	15.00	10.00	24.00
	Bundle	60.00	40.00	72.00
			1	· · · · · · · · · · · · · · · · · · ·
	Layer	608	453	299
LBS PER	Section	760	566	797
	Bundle	3,040	2,264	2,392

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	1	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	1	✓





CONTRACTORS

COMMERCIAL



LARGE TAPERED 380 x 150 x 230mm 15 x 5 % x 9" 20 units/Bundle .63 Fc.Ft./Stone



MEDIUM TAPERED 320 x 150 x 230mm 12 % x 5 % x 9" 20 units/Bundle .52 Fc.Ft./Stone



SMALL TAPERED 250 x 150 x 230mm 9 % x 5 % x 9" 20 units/Bundle .42 Fc.Ft./Stone



Single Units

CORNER320 x 150 x 230mm
12 5% x 5 % x 9"
40 units/Bundle
.52 Sq.Ft./Stone



COPING TAPERED 320 x 75 x 300mm 12 % x3 x 11 %" 72 units/Bundle .26 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. **Quarry tubing is only added to orders if requested.** Ledgestone[™], Olde Quarry[™] coping, Brussels Block[®] XL, Brussels Fullnose[™] or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Random Bundle















CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

			PILLAR UNIT
	Bundle Type	RANDOM	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	100 MM	100 MM
	Bundle	31.91	29.97
FCFT PER	Layer	10.64	9.99
	Stone	-	0.33
	Lovers	3.00	3.00
PER BUNDLE	Layers	3.00	
	Sections	-	3.00
LUET DED	Bundle	94.46	-
LNFT PER	Unit	1.50	-
	SqFt	-	3.00
UNITS PER	Section	-	30.00
	Bundle	63.00	90.00
	Layer	948	890
LBS PER	Section		890
LDS PER	Section	-	090

COLORS	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	/	✓
Graphite	SR.n/a SRI n/a	/	✓
River	SR.n/a SRI n/a	/	✓
Sierra	SR.n/a SRI n/a	/	/

Bundle




2,845




2,670

CONTRACTORS

COMMERCIAL





Lineo spacers are used to provide shadow effect during installation and are provded with your Lineo product. 1 Package = 144 Spacers / 68 T's

Single Unit

Random Bundle



XL RECTANGLE 600 x 100 x 200mm 23 % x 3 % x 7 % 18 units/Bundle .33 Fc.Ft./Stone



LARGE RECTANGLE 500 x 100 x 200mm 19 ¾ x 3 % x 7 % 15 units/Bundle .33 Fc.Ft./Stone



RECTANGLE 400 x 100 x 200mm 15 ¾ x 3 % x 7 % 15 units/Bundle .55 Fc.Ft./Stone



SMALL RECTANGLE 300 x 100 x 200mm 11% x 3% x 7% 15 units/Bundle .44 Fc.Ft./Stone



PILLAR UNIT 300 x 100 x 200mm 11 % x 3 % x 7 % 90 units/Bundle .33 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is **produced on a required, refundable skid.** Lineo spacers are shipped with random wall bundles to create even spacing between units. Ledgestone[™], Unilock Natural Stone or 6" x 12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.











CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Split

TECHNOLOGIES

REALA™

Cast from natural stone wall

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER / PILLAR
	Bundle Type	RANDOM	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	102 MM	102 MM
	I		
	Bundle	11.07	12.95
FCFT PER	Layer	2.214	2.59
	Stone	-	-
PER BUNDLE	Layers	5.00	5.00
T EN BONDEE	Sections	-	-
	Bundle	33.00	_
LNFT PER	Unit	-	-
	SqFt	-	-
UNITS PER	Section	-	-
	Bundle	25.00	20.00
	I	T	
	Layer	242.31	173.4
LBS PER	Section	-	-

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Coastal Slate	SR n/a SRI n/a	/	/

1,211.05

867.01

Bundle



LARGE WEDGE26.96 (23.97) x 4 x 9"
685 (609) x 102 x 229mm
5 units/Bundle
.71 Fc.Ft./Stone



MEDIUM WEDGE 18.97 (15.98) x 4 x 9" 482 (406) x 102 x 229mm 10 Units/ Bundle .48 Fc.Ft./Stone



SMALL WEDGE10.98 (8.0) x 4 x 9"
279 (203) x 102 x 229mm
10 Units/ Bundle
.26 Fc.Ft./Stone



Corner/Pillar Bundle

CORNER/PILLAR UNIT 14.96 (13.46) x 4 x 9" 380 (342) x 102 x 229 mm 20 Units/ Bundle .647 Fc.Ft./Stone

(10 rights + 10 lefts per bundle)

Notes: Sold in full bundles only and is produced and sold on a required, refundable skid. While coping is optional with Mackinaw wall, if you are looking for coping, Ledgestone" or Unilock Natural Stone complement it well. All measurements are nominal. Contact Unilock for more information.

Random Bundle

Olde Quarry™



APPLICATIONS















CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Surface Texture - Standard

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER	COPING
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	WISCONSIN	CHICAGO	CHICAGO
	Thickness (mm)	114 MM	114 MM	75 MM
	Bundle	33.75	30.89	24.00
FCFT PER	Layer	5.63	6.18	3.00
	Stone	-	-	-
PER BUNDLE	Layers	6.00	5.00	8.00
FLK BUNDLL	Sections	5.00	4.00	4.00
LNFT PER	Bundle	90.00	82.40	96.00
	Unit	-	-	-
	SqFt	-	2.59	4.00
UNITS PER	Section	18.00	20.00	24.00
	Bundle	90.00	80.00	96.00
	Layer	521	630	380
LBS PER	Section	625	788	760
	Bundle	3,125	3,150	3,039

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	✓	✓
Sandstone	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓



CONTRACTORS



15" LARGE TAPERED 380 x 114 x 230mm 15 x 4 ½ x 9" 30 units/Bundle .47 Fc.Ft./Stone



12" MEDIUM TAPERED 305 x 114 x 230mm 12 x 4 ½ x 9" 30 units/Bundle .38 Fc.Ft./Stone



9" SMALL TAPERED 230 x 114 x 230mm 9 x 4 ½ x 9" 30 units/Bundle .28 Fc.Ft./Stone



Single Units

CORNER 300 x 114 x 230mm 11 % x 4 ½ x 9" 80 units/Bundle .39 Fc.Ft./Stone



COPING TAPERED 305 x 75 x 305mm 12 x 3 x 12" 96 units/Bundle .25 Fc.Ft./Stone

Notes: Structural retaining walls greater than 2' high require professional engineering. Quarry Coping sold and produced on a returnable, refundable pallet. Quarry tubing is added to orders when requested. Tubing may be used to set back walls. Ledgestone[™], Olde Quarry[™] Coping, Brussels Block' XL, Brussels Fullnose or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.

Random Bundle

















CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Surface Texture - Standard

TECHNOLOGIES

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER	
	Bundle Type	RANDOM	SINGLE	
	Plant Produced	WISCONSIN	WISCONSIN	
	Thickness (mm)	114 MM	114 MM	
	Bundle	33.75	18.24	
FCFT PER	Layer	5.63	6.08	
	Stone	-	0.38	
PER BUNDLE	Layers	6.00	3.00	
	Sections	5.00	-	
	Bundle	-	18.24	
LNFT PER	Unit	-	0.38	
SqFt - 2				
	-		2.65	
UNITS PER	Section	18.00	-	
	Layer	15.00	16.00	
	Bundle	90.00	48.00	
	Layer	498	641	
LBS PER	Section	598	-	
	Bundle	2,988	1,922	

COLORS	Reflectance	Stock	Stock
Midnight Charcoal	SR.n/a SRI n/a	/	✓
Sandstone	SR.n/a SRI n/a	/	✓
Natural Grey	SR.n/a SRI n/a	/	1

Random Bundle



15" LARGE TAPERED 380 x 114 x 230mm 15 x 4 ½ x 9" 30 units/Bundle .33 Fc.Ft./Stone



12" MEDIUM TAPERED 305 x 114 x 230mm 12 x 4 ½ x 9" 30 units/Bundle .33 Fc.Ft./Stone



9" SMALL TAPERED 230 x 114 x 230mm 9 x 4 ½ x 9" 30 units/Bundle .55 Fc.Ft./Stone





CORNER 306.6 x 114 x 228.6mm 12 x 4 ½ x 9" 48 units/Bundle .38Fc.Ft./Stone

Notes: Corner and wall bundles are produced and sold on a required, refundable skid. Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request. Use plastic connectors on set-back walls. Quarry tubing is added to orders when requested. Tubing may be used to set back walls. Ledgestone. Olde Quarry Coping, Brussels Block XL, Brussels Fullnose or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.













CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER	XL UNIT	COPING
	Bundle Type	DOUBLE	SINGLE	DOUBLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
	Bundle	30.01	26.66	20.34
FCFT PER	Layer	10.00	5.33	2.91
	Stone	1.67	1.50	0.48
PER BUNDLE	Layers	3.00	5.00	7.00
	Sections	6.00	-	2.00
LNFT PER	Bundle	-	53.34	82.95
	Unit	-	1.33	1.97
	CαF+	0.60		2.06
	SqFt		-	
UNITS PER	Section	3.00	-	21.00
	Bundle	18.00	40.00	42.00
	Layer	547	618	411
LBS PER	Section	274	-	1,437
	Bundle	1,641	3,091	2,875

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
Nevada	SR.n/a SRI n/a	✓	✓	✓
Sierra	SR.n/a SRI n/a	/	1	1



CONTRACTORS



CORNER 200 x 150 x 300mm 7 % x 5 % x 11 %" 18 Double units/Bundle 36 Single units/Bundle 1.67 Fc.Ft./Stone



XL TAPERED UNIT 400 x 150 x 300mm 15 34x 5 % x 11 %" 32 Single units/Bundle .67 Fc.Ft./Stone



COPING300 x 75 x 300mm
11% x 3 x 11 %"
42 Double units/Bundle
.48 Fc.Ft./Stone

Notes: **XL UNITS ARE SOLD IN FULL BUNDLES ONLY. Corner and XL Units are produced and sold on a required, refundable skid.** Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is 3½" every course or 1½" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. Coping bundles are Double units, packaged with 16 closed end pieces per bundle. (8 Left & 8 Right). 12" Closed End Coping pieces are not sold separately. All measurements are nominal. Contact Unilock for more information.

Sold Individually

Pisa[™] Smooth XL CLASSIC



APPLICATIONS









APPEARANCE

Edge Detail - n/a Surface Texture - Smooth

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		XL CORNER	XL TAPERED	COPING & CLOSED-END / COPING
	Bundle Type	SINGLE	SINGLE	BUNDLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
	Bundle	58.15	25.84	15.50
FCFT PER	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.32
PER BUNDLE	Layers	5.00	5.00	8.00
	Sections	-	-	3.00
LNET DED	Bundle	-	-	62.99
LNFT PER	Unit	-	-	1.31
	SqFt	1.03	1.55	3.10
UNITS PER	Section	-	-	16.00
	Bundle	60.00	40.00	48.00
	Layer	719	627	285
LBS PER	Section	- 119	021	761
LDO I LIK	Bundle	3,593	3,135	2,282
	1 1 1	-,	-,	_,

COLORS	Reflectance	Stock	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	1	✓
Granite	SR n/a SRI n/a	✓	1	✓
Midnight Charcoal	SR n/a SRI n/a	✓	1	✓
Natural Grey	SR n/a SRI n/a	-	-	✓
Sandstone	SR n/a SRI n/a	-	-	/







COMMERCIAL

Sold Individually





XL TAPERED 400 x 150 x 300mm 15 3/4 x 5 % x 11 %" 40 units/Bundle 0.65 Fc.Ft./Stone



COPING400 x 75 x 300mm
15 ³/₄ x 3 x 11 ⁷/₈"
24 units/Bundle
0.32 Fc.Ft./Stone



CLOSED-END / COPING 400 x 75 x 300mm 15 34 x 3 x 11 1/8" 24 units/Bundle 0.32 Fc.Ft./Stone

Notes: **XL CORNER AND TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY AND PRODUCED ON A REQUIRED, REFUNDABLE SKID.** Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

2 Unit Bundle

















APPEARANCE

Edge Detail - Zero Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER
Bundle Type		RANDOM	RANDOM
	Plant Produced	AYR	AYR
Thickness (mm)		57 MM	57 MM
	Bundle	24.30	16.21
FCFT PER	Layer	3.04	4.05

PER BUNDLE	Layers	8.00	4.00
	Sections	_	_

Stone

LNFT PER	Bundle	130.69	-	
	Unit	-	-	

	SqFt	-	2.47
UNITS PER	Section	-	-
	Bundle	128.00	40.00

	Layer	249	293
LBS PER	Section	-	-
	Bundle	1,990	1,173

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓ ·	✓
Coastal Slate	SR n/a SRI n/a	1	1





CONTRACTORS

COMMERCIAL

Corner Bundle



LONG CORNER UNIT 17½ x 9-10 x 2¼" 450 x 230-250 x 57mm 20 units/Bundle



SHORT CORNER UNIT 14½ x 9-10 x 2¼"

375 x 230-250 x 57mm 20 units/Bundle

Random Bundle



STANDARD UNIT 1 $8 \times 9 - 10 \times 2\frac{1}{4}$ " 200 x 230-250 x 57mm 32 units/Bundle



STANDARD UNIT 2 12 x 9-10 x 21/4" 300 x 230-250 x 57mm 32 units/Bundle



STANDARD UNIT 3 12 x 9-10 x 21/4" 300 x 230-250 x 57mm 32 units/Bundle



STANDARD UNIT 4 17 x 9-10 x 21/4" 425 x 230-250 x 57mm 32 units/Bundle













CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		STANDARD	COPING
	Bundle Type	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	180 MM	180 MM
	Bundle	20.88	20.88
FCFT PER	Layer	6.96	6.96
	Stone	1.74	1.74
		2.22	0.00
PER BUNDLE	Layers	3.00	3.00
	Sections	-	-
LNFT PER	Bundle	35.43	35.43
LNF1 PER	Unit	2.45	2.45
	SqFt	0.57	0.57
UNITO DED	-		0.37
UNITS PER	Section	-	-
	Bundle	12.00	12.00
	Layer	898	901
LBS PER	Section	-	-
	Bundle	2,695	2,702

COLORS	Reflectance	Stock	Stock
Fieldstone	SR n/a SRI n/a	✓	/
Granite	SR n/a SRI n/a	✓	/
Midnight Charcoal	SR n/a SRI n/a	/	/





CONTRACTORS

COMMERCIAL



STANDARD 900 x 180 x 290mm $35 \frac{1}{2} \times 7 \times 11 \frac{1}{2}$ " 12 units/Bundle 1.94 Fc.Ft./Stone



COPING 900 x 180 x 290mm $35 \frac{1}{2} \times 7 \times 11 \frac{1}{2}$ " 12 units/Bundle 1.94 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

Single Units

SienaStone[™] CLASSIC



APPLICATIONS







APPEARANCE

Edge Detail - n/a Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER 90	CORNER 45	STANDARD	STANDARD 925	COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
-	Thickness (mm)	185 MM	185 MM	185 MM	185 MM	185 MM
	1					
	Bundle	17.19	13.50	12.00	6.00	12.00
FCFT PER	Layer	5.73	4.50	4.00	2.00	4.00
	Stone	2.87	2.25	2.00	2.00	2.00
			-			
PER	Layers	3.00	3.00	3.00	3.00	3.00
BUNDLE	Sections	-	-	-	-	6.00
LNFT	Bundle	-	-	19.50	9.75	19.50
PER	Unit	-	-	3.25	3.25	3.25
	SqFt	0.35	0.44	0.50	0.50	0.50
UNITS PER	Section	-	-	-	-	1.00
	Bundle	6.00	6.00	6.00	3.00	6.00
	1					
	Layer	954	790	926	872	919
LBS PER	Section	-	-	-	-	459
	Bundle	2,862	2,370	2,778	2,617	2,756

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Granite	SR n/a SRI n/a	-	-	-	-	1
Nevada	SR n/a SRI n/a	S0	S0	S0	S0	1
Sierra	SR n/a SRI n/a	SO	SO	SO	SO	1





CONTRACTORS

COMMERCIAL



CORNER 90° 925 x 185 x 500mm 36 ½ x 7 3/8 x 19 3/4" 6 units/Bundle 2.87 Fc.Ft./Stone

Single Units



CORNER 45° 925 x 185 x 500mm 36 ½ x 7 3/8 x 19 3/4" 6 units/Bundle 2.25 Fc.Ft./Stone



STANDARD 1000 x 185 x 500mm 39 % x 7 % x 19 %" 6 units/Bundle 2.00 Fc.Ft./Stone



STANDARD 925 1000 x 185 x 925mm 39 % x 7 % x 36 ½" 3 units/Bundle 2.00 Fc.Ft./Stone



COPING1000 x 185 x 500mm
39 3/6 x 7 3/6 x 19 3/4"
6 units/Bundle
2.00 Fc.Ft./Stone





APPEARANCE

Edge Detail - n/a Surface Texture - Standard

CROSS SECTIONS

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

	48" STEP
Bundle Type	SINGLE
Plant Produced	GORMLEY
Thickness (mm)	180 MM

	Bundle	13.95
FCFT PER	Layer	4.65
	Stone	2.33

PER BUNDLE	Layers	3.00
PER BUNDLE	Sections	-

LNFT PER	Bundle	24.00
LNFIFER	Unit	4.00

	SqFt	0.43
UNITS PER	Section	-
	Rundle	6.00

	Layer	1,081
LBS PER	Section	-
	Bundle	3,242

COLORS	Reflectance	Stock
Dusk	SR.n/a SRI n/a	/





CONTRACTORS

COMMERCIAL

Single Unit



48" STEP 1200 x 180 x 500mm 47 1/4 x 7 x 19 3/4" 6 units/Bundle 2.33 Fc.Ft./Stone



APPLICATIONS

















APPEARANCE

Edge Detail - n/a Surface Texture - Multiple (see below)

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™ (UMBRIANO®)

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits




Download the U-Cara Modular Fireplace Installation Guide.









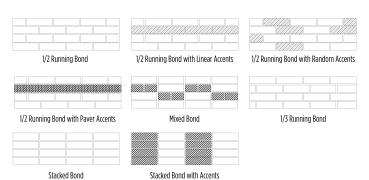

















	Fascia Panels	STANDARD SMOOTH	CLOSED-END SMOOTH	STANDARD UMBRIANO	CLOSED-END UMBRIANO	3" SERIES	STANDARD PITCHED	CLOSED-END PITCHED
	Bundle Type	SINGLE	MULTI	SINGLE	MULTI	SINGLE	SINGLE	MULTI
	Plant Produced	CHICAGO	CHICAGO	GEORGETOWN	GEORGETOWN	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	150 MM	150 MM	71 MM	150 MM	150 MM
	Bundle	61.52	54.18	61.52	54.18	59.32	61.52	54.18
FCFT PER	Crate	-	-	-	-	-	-	-
TOTTLE	Sections	10.25	9.03	10.25	9.03	9.89	10.25	9.03
	Stone	0.73	1.29	0.73	1.29	0.18	0.73	1.29
PER BUNDLE	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00
PER BUNDLE	Sections	-	-	-	-	-	-	-
LNFT PER	Bundle	129.50	104.86	129.50	107.94	-	129.50	107.94
LNF1 PEK	Unit	1.54	2.50	1.54	2.57	-	1.54	2.57
	SqFt	1.37	0.78	1.37	0.78	5.66	1.37	0.78
UNITO DED	Sections	-	-	-	-	-	-	-
UNITS PER	Crate	-	-	-	-	-	-	-
	Bundle	84.00	42.00	84.00	42.00	336.00	84.00	42.00
	Layer	275	207	344	207	250	317	236
	Sections	-	-	-	-	-	-	-
LBS PER	Crate	-	-	-	-	-	-	-
	Bundle	1,648	1,241	2,067	1,240	1,501	1,904	1,416
COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Bavarian	n/a	1	1	-	-	-	1	1
Champagne	n/a	1	1	-	-	-	-	-
Dark Charcoal	n/a	/	✓	-	-	-	-	-
Fossil	n/a	-	-	-	-	-	✓	✓
French Grey	n/a	-	-	✓	✓	-	-	-
Granite Fusion	n/a	1	✓	-	-	-	✓	✓
Onyx Black	n/a	-	-	-	-	1	-	-
Opal Blend	n/a	✓	✓	-	-	-	-	-

FASCIA PANELS STYLES

n/a

Summer Wheat



6" STANDARD 5% x 18 % x 2 % " 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone



6" PITCHED 5 % x 18 3% x 2 3/4" 150 x 466 x 70mm 84 units/Bundle .73 Fc.Ft./Stone



3" SERIES PANEL 2% x 9 x 2 3%" 71 x 231 x 60 mm 336 units/Bundle .18 Fc.Ft./Stone

FASCIA PANELS FINISHES





PITCHED





SERIES

HTOOMS

2 UNIT PITCHED CLOSE-END BUNDLE

2 UNIT STANDARD CLOSE-END BUNDLE



CLOSED-END FASCIA PANEL 5% x 21 x 2 3/8" 150 x 530 x 60mm 42 units/Bundle 1.29 Fc.Ft./Stone 24 Rights & 18 Lefts



STANDARD FASCIA HALF PANEL 6 x 9 1/4 x 2 3/8" 150 x 233 x 60mm 42 units/Bundle 1.29 Fc.Ft./Stone



CLOSED-END PITCHED PANEL 5% x 20 % x 2 3/4" 150 x 530 x 70mm 42 units/Bundle 1.29 Fc.Ft./Stone 24 Rights & 18 Lefts



UMBRIANO®

PITCHED FASCIA HALF PANEL 6 x 9 ½ x 2 ¾6" 150 x 233 x 70mm 42 units/Bundle 1.29 Fc.Ft./Stone 24 Rights & 18 Lefts

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



		LAVANO STANDARD	SUBWAY STANDARD	CLOSED END
	Bundle Type	SINGLE	SINGLE	BUNDLE
Plant Produced		CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	150 MM
	Bundle	61.52	61.52	54.18
FCFT PER	Layer	10.25	10.25	9.03
	Stone	0.73	0.73	1.29

APPLICATIONS

















CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a Surface Texture - Smooth (Subway) Textured (Lavano)

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

LNFT PER	Bundle	129.50	129.50	104.86	
	Unit	1.54	1.54	2.50	
	SqFt	1.37	1.37	0.78	
UNITS PER	Section	-	-	-	
	Bundle	84.00	84.00	42.00	
	Layer	275.00	285.00	207.00	
LBS PER	Section	-	-	-	
	Bundle	1,648	1,709	1,240	
001.000	D. 0. 4	0, 1	0	0, 1	

6.00

6.00

6.00

ı	COLORS	Reflectance	Stock	Stock	Stock
	Dark Charcoal	SR n/a SRI n/a	-	1	1
	Fossil	SR n/a SRI n/a	1	-	
	Granite Fusion	SR n/a SRI n/a	✓	-	
	lvory	SR n/a SRI n/a	-	✓	/
	Opal	SR n/a SRI n/a	-	✓	1





CONTRACTORS

COMMERCIAL



LAVANO STANDARD FASCIA PANEL

5 % x 18 % x 2 3/6" 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone



Closed-End Bundle

Closed-End Bundle

LAVANO HALF FASCIA PANEL

Layers

Sections

PER BUNDLE

5 % x 9 ¼ x 2 3/8" 150 x 233 x 60mm



LAVANO CLOSED-END FASCIA PANEL

 $5\% \times 20\% \times 23\%$ " 150 x 530 x 60mm



Single Unit



SUBWAY STANDARD FASCIA PANEL

5 % x 18 % x 2 % " 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone



SUBWAY HALF FASCIA PANEL

5 % x 9 ¼ x 2 3/8" 150 x 233 x 60mm



SUBWAY CLOSED-END FASCIA PANEL

5% x 20 % x 2 3/8" 150 x 530 x 60mm

U-Cara[®] Multi-Face Wall System



ENDURACOLOR™ Refined surface and long-lasting color

TECHNICAL INFORMATION

COLORFUSION™ (UMBRIANO) Subtly mottled colored finish

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

APPLICATIONS















CROSS SECTIONS


All Cross Sections are available on Unilock's Contractor web site under Products:


contractor.unilock.com


APPEARANCE

Edge Detail - n/a Surface Texture - Smooth, Standard, Series Exposed, Umbriano® Mottled, Pitched & Flamed

U-CARA RETAINING WALL GEOGRID SECTION

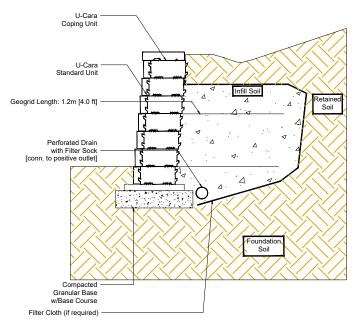

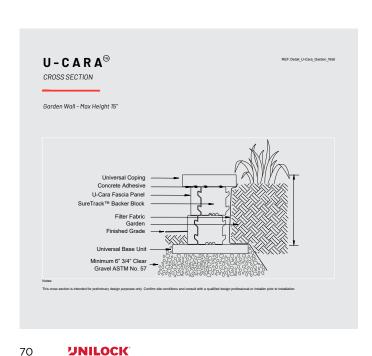

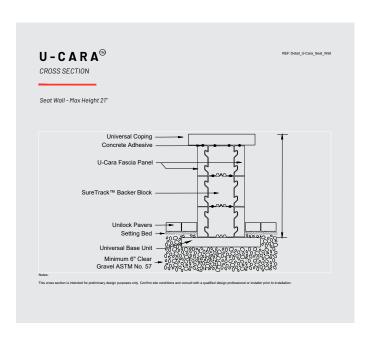

Sure Track



CORNER BACKER 5 % x 6 % x 11 5/8" 150 x 175 x 294mm 56 units/Bundle



LARGE BACKER 5 % x 7 % x 11 5%" 150 x 200 x 294mm 63 units/Bundle



STANDARD BACKER 5 % x 7 % x 5 %" 150 x 200 x 150mm 105 units/Bundle

		LARGE/CORNER/ PILLAR BACKER	LARGE BACKER	STANDARD BACKER
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	150 MM
	Bundle	15.82	20.35	33.91
FCFT PER	Layer	3.96	6.78	11.30
	Stone	0.28	0.32	0.32
PER BUNDLE	Layers	4.00	3.00	3.00
TENDONDEE	Sections	-	-	-
	Bundle	-	41.34	69.99
LNFT PER	Unit	-	0.66	0.67
	SqFt	3.54	3.10	3.10
UNITS PER	Sections	-	-	-
	Bundle	56.00	63.00	105.00
	<u> </u>			
	Layer	521	922	819
LBS PER	Sections	-	-	-
	Bundle	2,085	2,766	2,458



CONTRACTORS



COMMERCIAL

Recommended



UNIVERSAL U-GRIP™ BASE 14 x 19 x 2 1/4" 355 x 482 x 55mm

See page 79 for more information



Extra Components

SURE TRACK CORNER INSERT L = 2"

L = 2" 50mm 40 Inserts per bag RS:ACC 245


Sold in full bags only

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

U-Cara® Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.







NO. MODEL DESCRIPTION


		DECORN HOR
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39"(10/PACK)
UCARA000005	UL-HCK	HEIGHT CONVERSION KIT
UCARA000006	UL-HCK-OS	HEIGHT CONVERSION KIT OVERSIZED
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000014	UL-HCK-CC-OS	HEIGHT CONVERSION CORNER CABINET OVERSIZED
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-0S	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-0S	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 641/2"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (183/8" x 183/8")
RS-UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
RS-UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
RS-UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
RS-UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
RS-UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
RS-UCARA004003	UL-ECK-0S-36	END CLAD KIT 36.5" OS






Download the U-Cara Modular Fireplace Installation Guide.


U-Cara® Wall Mount System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.











Architectural Coping & Pillar Cap





APPLICATIONS













APPEARANCE

Edge Detail - Rounded Surface Texture - Exposed Joint Spacing - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		COPING	PILLAR CAP 28"
	Bundle Type	SINGLE	SINGLE
	Plant Produced		
	Thickness (mm)	60 MM	76 MM
SQFT PER	Bundle	-	-
OQLITER	Unit	-	-
	Bundle		
	Bullule	-	-
FCFT PER	Layer	-	-
	Unit	-	-
	Bundle	42.00	
LNFT PER			
	Unit	2.00	-
	Bundle	21.00	6.00
UNITS PER	SqFt	-	-
1 DO DED	Unit	68	183

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓

Bundle



1,428



1,098

CONTRACTORS

COMMERCIAL



COPING609 x 60mm x 355mm
24 x 2 ³/₆ x 14"
21 units/Bundle



LBS PER

PILLAR CAP 711 x 76mm x 711mm 28 x 3 x 28" 6 units/Bundle

Note: this unit is tapered at the top

Notes: SOLD IN FULL PALLETS ONLY and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

Single Unit



APPLICATIONS













APPEARANCE

Edge Detail - Zero Surface Texture - Weathered Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	BRUSSELS FULLNOSE
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

	Bundle	-
FCFT PER	Layer	-
	Stone	-

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	4.00

LNFT PER	Bundle	130.00
LNFIFER	Unit	0.50

	SqFt	-
UNITS PER	Section	65.00
	Bundle	260.00

	Layer	316
LBS PER	Section	790
	Bundle	3,160

COLORS	Reflectance	Stock
Midnight Charcoal	SR12 SRI 9	/
Sandstone	SR41 SRI 46	/
Sierra	SR. n/a SRI n/a	/



CONTRACTORS

75



Stocked at Aurora, Elkhorn & Tonganoxie

BRUSSELS FULLNOSE 152.4 x 304.8 x 60mm 6 x 12 x 2 3/6" 260 units/Bundle

Notes: Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

6 x 12 Fullnose CLASSIC



APPLICATIONS













APPEARANCE

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	6 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

	Bundle	-
FCFT PER	Layer	-
	Stone	-

PER BUNDLE	Layers	4.00
PER BUNDLE	Sections	-

I NFT PFR	Bundle	104.00
LNFIFER	Unit	0.50

	SqFt	-
UNITS PER	Section	-
	Bundle	208.00

	Layer	698
LBS PER	Section	-
	Bundle	2,791

COLORS	Reflectance	Stock
Midnight Charcoal	SR. n/a SRI n/a	/
Sandstone	SR. n/a SRI n/a	/
Sierra	SR. n/a SRI n/a	/



CONTRACTORS



6 X 12 FULLNOSE 150 x 300 x 60mm 5 % x 11 % x 2 3/8" 208 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Single Unit

Ledgestone[™] Fullnose, Coping & Closed-End Coping



APPLICATIONS













APPEARANCE

Edge Detail - n/a Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	60 MM	70 MM	70 MM	70 MM	70 MM
		- 40				0.07
FCFT	Bundle	5.12	5.52	5.52	6.87	6.87
PER	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57
PER	Layers	13.00	4.00	4.00	4.00	4.00
BUNDLE	Sections	-	-	-	-	-
LNFT	Bundle	26.00	24.00	24.00	30.00	30.00
PER	Unit	2.00	2.00	2.00	2.50	2.50
	SqFt	2.54	2.18	2.18	1.75	1.75
UNITS	Section	2.04	2.10	2.10	-	-
PER	Bundle	13.00	12.00	12.00	12.00	12.00
	Layer	56	193	199	282	279
LBS PER	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116







CONTRACTORS

COMMERCIAL



FULLNOSE COPING 610 x 305 x 60mm $24 \times 12 \times 2 \, \frac{3}{8}$ " 13 units/Bundle .39 Fc.Ft./Stone

Single Units



STANDARD COPING 610 x 305 x 70mm 24 x 12 x 2 ¾" 12 units/Bundle .46 Fc.Ft./Stone



STANDARD CLOSED-END **COPING** 610 x 305 x 70mm 24 x 12 x 2 ¾" 12 units/Bundle .46 Fc.Ft./Stone



LARGE COPING 762 x 343 x 70mm $30 \times 13 \, 1/_{\! 2} \times 2 \, 3/_{\! 4}"$ 12 units/Bundle .57 Fc.Ft./Stone



LARGE CLOSED-END **COPING** 762 x 343 x 70mm 30 x 13 ½ x 2 ¾" 12 units/Bundle .57 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

Ledgestone[™] Pillar Caps, Steps & Fire Pit Coping



APPLICATIONS









APPEARANCE

Edge Detail - n/a Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		30" STEP TREAD	48" STEP	72" STEP	24" PILLAR CAP	29" PILLAR CAP	21 1/2" FIRE PIT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Р	lant Produced	CHICAGO	MULTI-PLANT	MULTI-PLANT	CHICAGO	CHICAGO	CHICAGO
Th	nickness (mm)	70 MM	150 MM	150 MM	100 MM	100 MM	65 MM
	Bundle	6.87	5.91	8.86	3.28	-	-
FCFT PER	Layer	1.72	1.97	2.95	0.66	-	-
	Stone	0.57	1.97	2.95	0.66	-	-
	Lavoro	4.00	3.00	3.00	5.00	5.00	6.00
PER BUNDLE	Layers	4.00	3.00	3.00	5.00	5.00	0.00
BUNDLE	Sections	-	-	-	-	-	-
LNFT PER	Bundle	30.00	12.00	18.00	10.04	-	-
LNFIPER	Unit	2.50	4.00	6.00	2.01	-	-
		Ĭ					
	SqFt	1.75	0.51	0.34	1.52	-	-
UNITS PER	Section	-	-	-	-	-	-
	Bundle	12.00	3.00	3.00	5.00	5.00	24.00
	Lavor	262	556	813	159	206	338
	Layer	202	330	013	159	206	330
LBS PER	Section	-	-	-	-	-	-
	Bundle	1,049	1,669	2,439	795	1,030	1,688

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Buff	n/a	✓	✓	/	✓	✓	/
Grey	n/a	/	✓	/	✓	✓	/





CONTRACTORS

COMMERCIAL

Single Unit



FIRE PIT COPING 254 x 546 x 65mm 10 x 21 ½ x 2 5/8" 24 units/Bundle



30" STEP TREAD 762 x 343 x 70mm 30 x 13 x 2 ¾" 12 units/Bundle .57 Fc.Ft./Stone



48" STEP1220 x 610 x 150mm
48 x 24 x 5 1/6"
3 units/Bundle
1.97 Fc.Ft./Stone



72" STEP1830 x 610 x 150mm
72 x 24 x 5 % "
3 units/Bundle
2.95 Fc.Ft./Stone



24" PILLAR CAP 610 x 610 x 100mm 24 x 24 x 3 %" 5 units/Bundle .66 Fc.Ft./Stone



29" PILLAR CAP 740 x 740 x 100mm 29 1/8 x 29 1/8 x 3 1/8" 5 units/Bundle .66 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

Single Units

Umbriano[®] Coping





APPLICATIONS













APPEARANCE

Edge Detail - Chamfered or Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3mm

TECHNOLOGIES

$\textbf{ENDURACOLOR}^{\text{\tiny{TM}}}$

Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral stain resistance

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		COPING CHAMFERED	COPING FULLNOSE
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	60 MM	60 MM
	Bundle	-	-
FCFT PER	Layer	-	-
	Stone	-	-
PER BUNDLE	Layers	10.00	10.00
	Sections	-	-
LNET DED	Unit	1.97	1.97
LNFT PER	Bundle	78.74	78.74
_	CaEt		
	SqFt	-	-
UNITS PER	Section	-	-
	Bundle	40.00	40.00
	Layer	252	252
LBS PER	Section	-	-
	Bundle	2,517	2,517

COLORS	Reflectance	Stock	Stock
French Grey	SR17 SRI 15	/	✓
Midnight Sky	SR17 SRI 15	✓	✓
Summer Wheat	SR42 SRI 48	✓	✓
Winter Marvel	SR17 SRI 15	/	/



CONTRACTORS



COPING CHAMFERED 360 x 600 x 600mm 14 x 24 x 2 3%" 40 units/Bundle



COPING FULLNOSE

360 x 600 x 60mm 14 x 24 x 2 ³/₈" 40 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Single Unit



APPLICATIONS









APPEARANCE

Edge Detail - n/a Surface Texture - Standard / Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	55 MM

	Bundle	-
FCFT PER	Layer	-
	Stone	-

PER BLINDI E	Layers	9.00
PER BUNDLE	Sections	-

LNFT PER	Bundle	85.50
LNFIPEK	Unit	1.58

	SqFt	-
UNITS PER	Section	-
	Bundle	54.00

	Layer	280
LBS PER	Section	-
	Bundle	2,524

COLORS	Reflectance	Stock
Natural	SR.n/a SRI n/a	1





CONTRACTORS

COMMERCIAL





UNIVERSAL U-GRIP BASE 482 x 55 x 355mm 19 x 2 1/4 x 14" 54 units/Bundle



APPLICATIONS



APPEARANCE

Edge Detail - Zero Surface Texture - Standard Joint Spacing - n/a Void % - n/a

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		SQUARE W/GRILL	SQUARE UNIT	ROUND W/GRILL	ROUND UNIT
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	300 MM	300 MM	300 MM	300 MM
DIAMETER	Outside	56.00	56.00	52.00	52.00
DIAMETER (inch)	Inside	40.00	40.00	36.00	36.00
(Insert	38.00	38.00	34.00	34.00
LAYER PER UNIT		3.00	3.00	3.00	3.00
UNIT PER LAYER		16.00	16.00	18.00	18.00
UNIT PER PALLET		48.00	48.00	54.00	54.00
LBS PER PALLET		1,545	1,525	1,145	1,125

COLORS	Reflectance	Stock	Stock	Stock	Stock
Granite	SR. n/a SRI n/a	-	-	1	1
Sandstone	SR. n/a SRI n/a	1	/	1	1
Sierra	SR n/a SRI n/a	✓	✓	✓	✓

SUNSET FIRE PIT KIT	Square	Round
Granite	-	RS-CON082
Granite w/Grill	-	RS-CON083
Sandstone	RS-CON037	RS-CON031
Sandstone w/ Grill	RS-CON040	RS-CON034
Sierra	RS-CON036	RS-CON030
Sierra w/ Grill	RS-CON039	RS-CON033





CONTRACTORS

COMMERCIAL





SUNSET ROUND W/GRILL 1300 x 1300 x 300mm 51 ½ x 51 ½ x 11 1/8"



SUNSET SQUARE W/GRILL 1400 x 1400 x 300mm 55 x 55 x 11 %"



SUNSET ROUND UNIT 1300 x 1300 x 300mm 51 1/4 x 51 1/4 x 11 7/8"



SUNSET SQUARE UNIT 1400 x 1400 x 300mm 55 x 55 x 11 7/8"

Unilock Elements

Tuscany Collection



TUSCANY FIREPLACE
Sandstone with Copthorne® (3 Color Blend)

ELEMENT PRODUCT CODES

Tuscany Collection	Sandstone	Sierra
Fireplace Top	RS-ELE074-1	RS-ELE095-2
Fireplace Bottom	RS-ELE088-1	RS-ELE096-2
Wood box Set	RS-ELE028-1	RS-ELE027-1
Arched Hearth	RS-ELE016-1	RS-ELE017-1



TUSCANY FIREPLACE Sierra with Copthorne® (3 Color Blend)

WEIGHTS

Tuscany Collection

Fireplace Top — 2925 lbs Fireplace Bottom — 4225 lbs Wood Boxes — 4005 lbs Arched Hearth — 1170 lbs

Barcelona Collection



BARCELONA FIREPLACE Sierra with Umbriano® (Summer Wheat)

ELEMENT PRODUCT CODES

Barcelona Collection

Sierra
Fireplace RS-ELE214
Wood box Set RS-ELE213
Arched Hearth RS-ELE212


WEIGHTS:

Barcelona Collection


Fireplace Top — 2725 lbs Fireplace Bottom — 4170 lbs Wood Boxes — 4200 lbs Arched Hearth — 1200 lbs

Unilock Elements

TYPICAL CROSS SECTION FOR CONCRETE PAD INSTALLATION

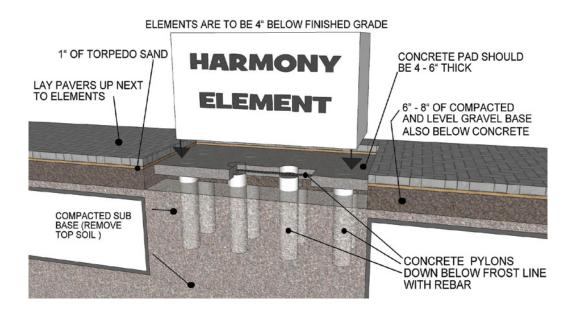

TUSCANY & BARCELONA FIREPLACE

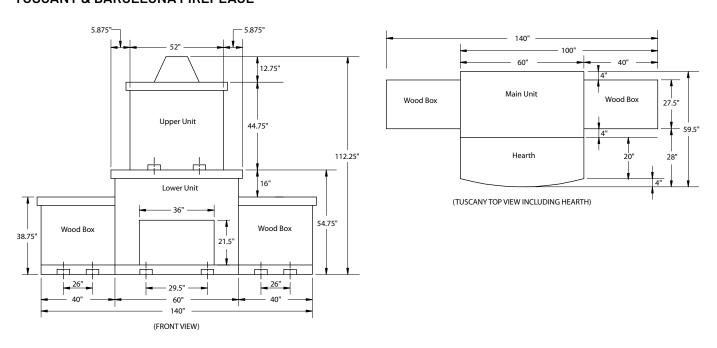

GUARANTEE

The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty, and may change without notice.

Note: Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL-approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

Cleaning Products



PROFESSIONAL GRADE OIL & GREASE REMOVER

RS-CLN001 1 quart; 6/case; 100 cases/skid (600 ea)

- · Removes penetrated petroleum-based stains.
- · Clean-dries from a liquid to a powder.



PAINT, TAR & RUBBER REMOVER

RS-CLN007 1 quart; 6/case; 120 cases/skid (720 ea)

- · Effectively dissolves paint, tar, rubber or chewing gum.
- · Water-rinsable stones, concrete, and masonry.



PAVER RESTORER

RS-CLN044 1 gallon; 4/case; 36 cases/skid (144 ea)

- Eco-friendly cleaner removes slurry and polymeric haze.
- · Cleans up to 200 sq. ft./gallon.



SUREBOND SURECLEAN

RS-CLN014 1 Gallon; 4/case; 36 cases/skid (27 cases/truckload - HAZMAT) RS-CLN063 5 Gallon (SPECIAL ORDER) 36 ea./skid

(25 ea./truckload - HAZMAT) • Environmentally friendly, non-acid, super

- concentrated cleaner. · Dislodges dirt, grime, tire scuffing and
- environmental soiling. · Cleans up to 250 sq. ft./gallon.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



SUREBOND EFFLO OFF

RS-CLN0621 gallon; 4/case; 36 cases/skid (27 cases/truckload - HAZMAT) RS-CLN067 5 gallons (SPECIAL ORDER) (25 ea/truckload - HAZMAT)

- · Heavy-duty, non-acid concentrated cleaner.
- · Designed for the removal of efflorescence, mineral and salt deposits.
- · Cleans up to 200 sq. ft./gallon.
- 1,000 lbs. HAZMAT weight restriction applies with this



SUREBOND STAIN & RUST BUSTER

RS-CLN065 1 quart; 12/case; 36 cases/skid (432 ea)

- Concentrated, evnironmentally friendly spot cleaner.
- · Cleans stains such as moss, mildew, leaf, rust and nongreasy food stains.
- S.R.B. is concentrated; requires dilution prior to use.



SUREBOND SURE STRIP

RS-CLN031 1 gallon; 4/case; 36 cases/skid (144 ea) RS-CLN032 5 gallons; 36/skid (SPECIAL ORDER)

- · Strips away a variety of sealers and coatings.
- · Fast-acting, works in minutes.
- · Ready to use, no dilution needed.
- Coverage is about 250 Sq. Ft./gallon.

Adhesive Products



SUREBOND SB-10 ADHESIVE

RS-ADH009-1 10 oz; 12/case; 140 cases/skid (1680 ea) RS-ADH015-1 28 oz; 12/case; 60 cases/skid (720 ea)

- · Fast set-up, quick curing.
- Can be applied to wet, damp & frozen block.
- Temeratures ranging from 0 100°F.



SUREBOND SB-15 ADHESIVE

* SPECIAL ORDER - FULL CASES ONLY *

RS-ADH050 10 oz tube: 12/case: 140 cases/skid RS-ADH051 28 oz tube; 12/case; 60 cases/skid

- Rapid set, 70% faster set time.
- · Superior durability including heavy vehicular traffic.
- Temeratures ranging from 10 100°F.
- 1200 psi.



ALLIANCE XP GATOR BLOCK ADHESIVE

RS-ADH039 10 oz; 12/case; 90 cases/skid (1080 ea) RS-ADH040 28 oz; 12/case; 60 cases/skid (720 ea)

- · Bonds permanently in 24 hours.
- Material may be repositioned for up to 30 minutes.
- Works in termperatures above 32°F.
- 850 psi in 24 hrs (1000 psi in 7 days.



TECHNISEAL STRUCTURE BOND™ FOAM **ADHESIVE**

RS-ADH048 24 oz; 12/case; 84 cases/skid (1008 ea)

- · Super-strength foam adhesive.
- Most items are bonded in just 8 minutes.
- Works best in temperatures between 0-120°F.
- Yields up to 600 In.ft. with a 3/8" bead.



TECHNISEAL STRUCTURE BOND™ GUN II

RS-T00L378 1 dispenser gun; 12/case

- Perfect for hard-to-reach applications.
- · Limits excessive spillage or dripping.
- Reusable: Easy clean-up using Gun Cleaner.



TECHNISEAL STRUCTURE BOND™ GUN **CLEANER**

RS-CLN093 24 oz/canister; 12 canisters/case

· Rapidly dissolves any uncured Structure Bond adhesive residue.



TECHNISEAL STICKY STONE


RS-ADH055 20.3 oz sausage; 15 sausages/case;

- · Professional-grade vertical hardscape adhesive.
- Perfect for outdoor kitchens, fire pits & columns, etc.
- Holds up to 15 lbs.
- Coverage: 1/4" x 1/4" deep area, each sausage will cover 50 linft.
- Recommended to place 1/2" bead every 3".
- · Applies mess-free and easily with gun applicator.

STICKY STONE GUN

RS-T00L557 1 dispenser gun kit; 10 kits/case

- Heavy-duty dispenser gun specially designed for Stickystone.
- Each gun kit includes: 6 nozzles, 2 extra pistons & steel hook pull.



Sealing Products



BACK TO BLACK SEALER

RS-SEAL238 1 quart; 3 quarts/case

- Quickly revives and enhances faded, dark limestone.
- Provides stain & water-resistant surface.
- 1 Liter covers up to 400 sqft with one coat depending on surface porosity.
- LIMITED STOCK AVAILABLE



SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

RS-SEAL151 1 gallon; 4/case; 36 cases/skid (27 cases) RS-SEAL152 5 gallons; 36 ea/skid (22 ea.) RS-SEAL176 55 gallons; 4 drums/skid | SPECIAL ORDER (1-55 Gal Drum - HAZMAT Limit per TL)

- Seals & enhances surface while hardening jointing sand.
- Deeply enhances surface with stain-resistant semi-gloss finish.
- Formulated with antifungal to stop growth of mold, fungi and moss.
- Rain safe in 90 minutes; approx. coverage 80-120 sq.ft.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



SUREBOND 4000 INVISIBLE PENETRATING

RS-SEAL 0331 gallon | RS-SEAL 0345 gallon

- · Surface Penetrating
- Long Lasting & Durable
- · Water repelant and salt blocker
- · Non-Hazardous and VOC/EPA Compliant



SUREBOND 1300 JOINT SAND STABILIZING SEALER

RS-SEAL037-2 1 gallon; 4/case; 36 cases/skid (144 ea) RS-SEAL036 5 gallon; 36 ea./skid

RS-SEAL038 55 gallons; 4 drums/skid (SPECIAL ORDER)

- Stabilizes joints, reduces sand washout, weeds & insects.
- Locks in with a clean, natural look & matte finish.
- Formulated with antifungal to protect film from mold, moss & algae.
- Approximate coverage 80 120 sq.ft.



TECHNISEAL® WL4 PROSERIES WET LOOK WATER REPELLANT

RS-SEAL001 1 gallon; 4/case; 45 cases/skid; (22 cases/truckload - HAZMAT) RS-SEAL073 5 gallons; 48 ea/skid;

- Solvent-based sealer to enhance pavers with wet-look, high-gloss finish.
- · Reduces oil & dirt penetration, makes cleaning easier.
- Approximate coverage is 150 sq.ft./gallon (750 sq.ft./5 gallons)
- 1,000 lbs HAZMAT weight restrictions applies with this product.





SEK JOINTING SAND

RS-SAND001-1 - Tan | RS-SAND140 - Grey | RS-SAND186 - Black | RS-SAND148 - Platinum 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Recommended for joints up to 3/4".
- Angular jointing sand, washed, screened & kiln-dried.
- Coverage: 50=75 Sq. Ft./bag with standard 1/4" joints.

Sand Products continued



SEK POLYSWEEP SAND

RS-SAND045 - Tan | RS-SAND046 - Grey | RS-SAND184 - Black | RS-SAND147 - Platinum | RS-SAND232 - Pearl 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Recommended for joints up to 3/4".
- · Haze Free Guaranteed Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.



SEK POLYSWEEP SAND X-TREME WIDE JOINT

RS-SAND111 - Tan | RS-SAND117 - Grey; RS-SAND185 - Black | RS-SAND149 - Platinum 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Formulated for joints 1/8" up to 4".
- Haze Free Guaranteed Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.



TECHNISEAL SMARTSAND

RS-SAND168 - Prairie Grey | RS-SAND169 - Prairie Tan 50 lb/bag • 56 bags/skid (2860 lbs/skid) Approx. 100-150sq.ft/gallon coverage

- Haze -free, fast-setting polymeric sand.
- Recommended for joints from 1/16" up to 1".
- Minimum Joint Depth is 1.5".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



TECHNISEAL HP NEXTGEL

RS-SAND130 - Prairie Grey | RS-SAND131 - Prairie Tan 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Dust & haze-free, fast-setting polymeric sand.
- Formulated for heavy-sloped, heavy traffic, high humidity and pool decks.
- For joints from 1/16" to 4", ideal for joints up to 1".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



ALLIANCE GATOR SUPER SAND

RS-SAND078 - Beige | RS-SAND080 - Slate Grey 50lb bag / 56 bags per skid

- Advanced haze-free polymeric sand.
- Formulated for pavers, slabs & wet cast pavers up to 1".
- Rain safe 1 hour after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".



ALLIANCE SUPER SAND G2

RS-SAND156 - Beige | RS-SAND157 - Slate Grey 50 lb/bag 56 bags/skid

- Intelligent polymeric sand to neutralize haze and dust.
- Formulated for joints up to 4" for traditional and up to 2" for overlay applications.
- Rapid Set Technology Rain safe 16 minutes after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".



ALLIANCE MAXX G2

RS-SAND158 - Beige | RS-SAND159 - Slate Grey | RS-SAND160 - Black Diamond | RS-SAND161 - Ivory Packaging: •50 lb/bag •56 bags/skid

- Intelligent polymeric sand to neutralize haze and dust.
- Formulated for joints up to 4" for traditional applications & up to 2" for overlay applications.
- Rapid Set Technology Rain safe 16minutes after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".

Sand Products continued



ALLIANCE EUROSTONE

RS-SAND095 - Slate Grey

- Polymeric sand designed for drainage and non-drainage base systems.
- Formulated for joints up to 1.5".
- Works above 32ºF.
- Coverage 65-85 Sq.Ft./bag with joints 1/8" to 3/8*.



ALLIANCE GATOR DUST

RS-SAND072 - Beige | RS-SAND073 - Grey 50 lb/bag • 56 bags/skid

- Polymeric stone dust.
- Formulated for joints from 1/2" to 6".
- · Ideal with Gator Base application.
- Coverage: 20-39 Sq.Ft./bag with joints 1" to 2".



ALLIANCE GATOR NITRO SAND

RS-SAND196 - Beige | SAND197 - Grey | SAND198 - Black SAND236 - Silver (LSA)

40 lb bucket • 48 buckets/skid

- Ready to use permeable jointing material.
- · Can be installed in wet or dry weather.
- Formulated for joints from 1/2" to 2".
- Ideal for concrete & wetcast pavers, Natural Stone & Porcelain Tile.
- Coverage: 10-84 Sq.Ft./bucket depending on joint width.

Permeable Chip Products



ALLIANCE GATOR AQUA ROCK

RS-AGG032 - 50lb./bag • 56 bags/skid RS-AGG033 2200 lb./Super Sack

- Meets ASTM No. 9 requirement for permeable joint units.
- High-strength granite ideal for bedding course
 ¿ jointing material.
- Coverage: 20-25 Sq.Ft./bag | 880-1100 Sq.Ft./ Super Sack.



SEK PERM CHIPS

50lb./bag • 56 bags/skid


RS-AGG035 - Eclipse Black | RS-AGG040 - Stormy Grey RS-AGG037 - Saturn Tan (SPECIAL ORDER/FULL SKID ONLY)

2500 lb Super Sack:

RS-AGG036 - Eclipse Black | RS-AGG039 - Saturn Tan RS-AGG041 - Stormy Grey

- High-strength crushed and washed granite meets ASTM No. 9 Stone Specifications for permeable joint filler
- Ideal for permeable paving stone installations, both as a bedding course and as a joint filler
- Coverage: 30-35Sq.Ft./bag | 1500-1750 Sq.Ft./Super Sack

Geotextile & Fabric Products



STRATAGRID - SGU60

RS-FAB101

- · Geogrid reinforcement for soil and aggregates
- Engineered to be mechanically & chemically durable in harsh construction and agressive soil environments
- Roll Dimensions: 6.25' wide x 288' length (200 Square Yards)
- 85 lbs/roll

Geotextiles and Fabric Products



UNILOCK DRIVEGRID™ SYSTEM

RS-FAB075

- 120' x 12.5' Roll 1,500 Sq. Ft.
- 56 lbs per roll.
- · Sold in full rolls only.



GEOTEXTILE FABRIC

RS-FAB001

- 6 oz. Non-woven multipurpose geotextile fabric.
- Sold in full roll quantities only.
- Roll Dimensions: 15' wide x 300' length (4500 Sq.Ft.)
- 225 lbs/roll.



ALLIANCE GATOR GRID 30-30

RS-FAB070 - 4x50'; 15 rolls/case; 4 cases (60 rolls/skid) (FULL CASES ONLY)

RS-FAB072 - 6'x150'; 30 rolls/skid

- Biaxial geogrid, with high molecular weight weight and hightenacity poolyester yarns
- High-tenacity polyester yarns woven in tension and finished with PVC cotaing



GATOR FABRIC GF4.4

RS-FAB044 - 4'x100'; 6 rolls/case; 4 cases (24 rolls)/skid (FULL CASES ONLY)

RS-FAB047 - 6'x300; 16 rolls/skid

- Needle punched non-woven geotextile made of polypropylene fibers
- Non-biodegradable and resistant to most soil chemicals.

Miscellaneous Items



WALL DRAIN PRO


 $RS-ACC086 - Black \mid RS-ACC123 - Grey \mid RS-ACC122 - Tan \\ 12 units/case; 63 cases/skid (full cases only)$


- Simpler, aesthetically pleasing improved water drainage product
- Drain height can be easily modified to use with any block height under 8"



X & T SLAB SPACERS

RS-ACC237 - X Spacers; 2" x 2"; 250 pcs./bag RS-ACC236 - T Spacers; 2" x 1"; 250pcs./bag






X & T bagged separately



Gator Base System



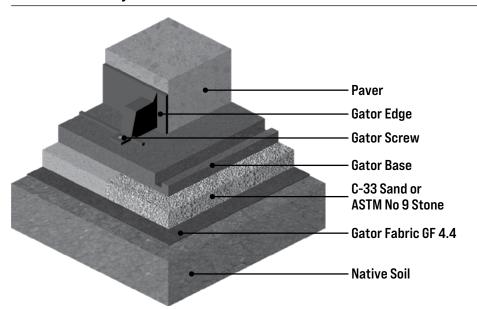

STEP 1 • EXCAVATION FOR THE GATOR BASE INSTALLATION

The total depth required will be determined by adding the thickness of the sand or chip setting bed (3/4" [19 mm]), GATOR BASE (3/4" [19 mm]), and thickness of the paver, slab, stone, or porcelain tile. Excavation depth is approximately 4" for a 2 3/8" [60 mm] concrete paver. Excavate 6" (15 cm) wider than the perimeter of the paved surface or 12" wider (30 cm) when building a seating wall or fire pit.

STEP 2 • LEVELING AND COMPACTING OF THE SOIL

The bottom of the excavated area should be uniform and smooth (+/- 3/8" [10 mm] in 10') and slope in the same direction as the finished paver surface Compact the soil using a vibrating plate or hand tamper in confined areas.

STEP 3 • ADD GATOR FABRIC GF4.4 AND INSTALL SETTING BED

Cover the bottom and sides of the excavated area with Gator Fabric GF4.4. Spread an even layer of sand (ASTM C33 Concrete Sand) or chip (ASTM No. 9 Stone) in a 3/4" [19 mm] thick layer over the Gator Fabric GF4.4. No compaction is needed for the chip stone. However, the sand-setting bed should be compacted using a hand tamper or vibrating plate. It will help to moisten the sand before compaction. The surface should be smooth, the finished paver surface will mirror the grade set in this step.

STEP 4 • INSTALL THE GATOR BASE


Cover the area with the GATOR BASE panels, 6" (15 cm) wider than the finished paver edge or 12" (30 cm) for a seating wall or fire pit. Lay the GATOR BASE units in an alternating (staggered) pattern - if the Gator Faces line up, the interlocking edges will align perfectly. Gator Base can easily be cut to size using a utility knife.

STEP 5 • INSTALL PAVERS, BLOCKS and gator edge

Place the pavers or blocks directly on the GATOR BASE. Adding a 1/2" (13 mm) of bedding sand onto the surface of the GATOR BASE is also an accepted method for non-uniform thickness stone. Install the Gator Edge on the GATOR BASE, firmly against the pavers or blocks. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Edge.

STEP 6 • APPLY GATOR MAXX G2 TO PAVER JOINTS

Gator Tile System

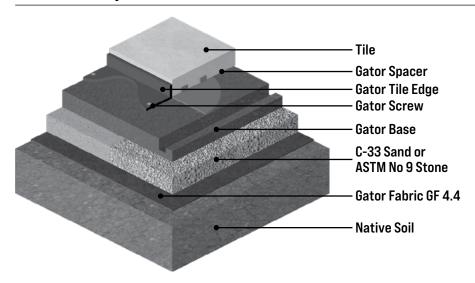

FOLLOW STEPS 1 TO 4 OF GATOR BASE SYSTEM

STEP 5 • INSTALL GATOR SPACER, GATOR XP GLUE AND TILE

The installation of porcelain tile directly on top of the Gator Base using the GATOR SPACER to provide uniform spacing and unparalleled stability. The GATOR SPACER has been designed to provide the right support, load transfer and a monolithic surface binding all units together with the help of the Gator XP Glue on every quadrants of the Gator Spacer.

STEP 6 • INSTALL GATOR TILE EDGE

Install the Gator Tile Edge on the GATOR BASE, firmly against the tiles. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Tile Edge.

STEP 7 • APPLY GATOR NITRO TO TILE JOINTS






Edging Products

SEK SNAPEDGE

RS-EDGE001 - 8'(96") piece; 24 pcs./bundle; 28 bundles (672 pcs)/skid RS-EDGE017 - Low Profile; 6' 8" (80") piece; 24 pcs./bundle; 28 bundles (672 pcs.)/skid

- One—piece edging system that handles both straight & curved installations.
- Unique and quick snip 'n flex feature.
- Open base design allows root and grass system to grow through.
- Standard Sidewall: 1 %" | Low Profile Sidewall: 1 3/8
- Skid Dimensions: 98"L x 48"W x 50"H 210 lbs./skid

RS-EDGE001



Low Profile - RS-EDGE017





SPIKES

RS-EDGE014 - 10" Round Spike; About 150 spikes/case; 48 cases/skid

- Premium heavy-duty landscape metal spike.
- SOLD IN FULL CASES ONLY.
- 51 lbs./case; 2,448 lbs./skid



SEK PERMEDGE

RS-EDGE033 - 8' (96") piece; 64 pcs./skid

- Permeable, spikeless edge restraint that includes attached geogrid.
- One-piece edging system that handles both straight and curved installations.
- Approximate Coverage: 25-30 Ln.Ft./ bucket



PERMAEDGE PAVER EDGING

RS-EDGE074 - 5 Gallon bucket; 77 lb./bucket

- Quick & easy to use cuts install time by 75%.
- The perfect combination of strength, flexibility and permeability.
- Mix 1 gallon of water to each 5 gallon bucket of PermaEdge.
- · Approximate Coverage: 25-30 Ln.Ft./bucket



PERMAEDGE PAVER EDGING

RS-EDGE081 - 50 lb. bag; 56 Bags/Pallet

- Quick & easy to use cuts install time by 75%.
- The perfect combination of strength, flexibility and permeability.
- Mix 2/3 gallon of water per bag.
- Approximate Coverage: 16' 18' Ln.Ft. on Dense Base, 12' - 16' Lin. Ft on Open Graded Base.



SEK EDGECRETE

RS-EDGE075 - 50lb bag; 56 bags/skid

- Paver restraint in a a bag Just Add Water.
- Fiber-reinforced concrete edge restraint.
- · Simple to install No spikes needed.
- Approximate coverage: Std. Base 17 Ln.Ft./bag; Permeable & Open Base- 13 Ln.Ft./bag

Edging Products continued

ALLIANCE GATOR EDGE RIGID

RS-EDGE055 8' piece; 24 pcs/bundle 28 bundles/pallet (672 pcs/pallet)

- Gator Edge Products are easy to use and quick to install. Offers great lateral support and makes definition easier for alleys, driveways or sidewalks.
- They are made with 100% polypropylene or polyethylene for strength and flexibility.
- Rigid Edging can be transformed to Flex with a simple cut.



ALLIANCE GATOR XTREME EDGE

RS-EDGE076 50 lb bag / 56 bags per skid.

- The ultimate fiber-reinforced structural edging solution for any hardscape project.
- Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast stones.
- Offers permanent continuous lateral support.
- Approximate Coverage: 20-25 sqft. per bag.

Stainless Steel Fireplace Insert

STAINLESS STEEL FIREPLACE INSERT

36" Unit - RS-FIR033; Order with RS-FIR041 (18" Flue Pipe), RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

42" Unit - FS-FIR034; (LIMITED AVAILABILITY); Order with RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

- Outdoor, Wood-burning Fireplace.
- Insert comes with refractory panels, mesh spark screen and solid steel log grate.
- · 254 lbs./Full Kit





	36	42
A	29"	36"
В	11-3/4"	11-3/4"
C	41"	48"
D	21"	24"
E	35"	42"
F	37"	417
G	21*	22-1/2"


RIGHT SIDE

ELECTRICAL

GAS LINE







Unilock Pedestal System

TECHNICAL SPECIFICATIONS


Material	Recycled Polypropylene		
Height Range	11/16" - 37-3/8" (17mm to 950mm)		
Ultimate Compressive Strength ¹	P Series - 20 kN (4,496 lbs)*		
	T Series - 10 kN (2,360 lbs)*		
	M Series - 15 kN (3,372 lbs)*		
Slope correction	0% to 8% @ 1% increment		
Base Diameter	P Series - 6.81" (173 mm)		
	T Series - 6.96" (177 mm)		
	M Series - 8.26" (210 mm)		
Spacer Tab Height	7/ ₁₆ " (11mm)		
Spacer Tab Thickness	%" (3mm) [gap between pavers]		
Biological / Chemical	Unaffected by molds and algae		
Resistance	Good resistance to alkali and bitumen		

1Detailed values for individual heights are given in the technical specification

MAX PEDESTAL ASSEMBLY OPTIONAL ACCESSORIES FLEMENTS Rubber shim Gap spacers +-----Noise reduction shim. Can also be Gap spacers create spaces between divided into parts. paver tiles with 3 mm width. Self levelling head Self levelling head automatically reduces surface slope up to 7%. Units have graduating heights. Height coupler (use up to 3) Additional Height couplers can be Adjustment ring added to increase pedestal height. for height regulation Adjustment ring allows easy and smooth pedestal height adjustment. Base +-----Wide pedestal base for better support. Bases have different heights depending on unit.

T Series are discontinued. Limited quantities available while supplies last. Contact Unilock for more information.

UNILOCK PEDESTAL HEIGHT CHART

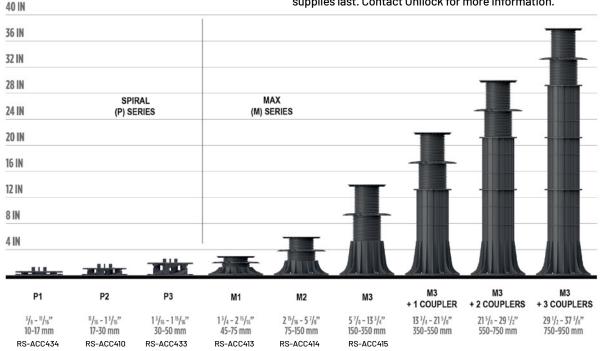

ACCESSORIES

NOTE: These units are created using a combination of of M1, M2 & M3 units. Contact Unilock for more information.

✓ Indicates compatible with Series™, ordered	Moveable Gap Spacer Tabs 1/8" (3MM)	Self-leveling Head 6% MAX	Rubber Shim 1/16" (1.5MM)	Height Coupler 7%" (200MM)	Slope Corrector 5%" (16MM)	Drill Driver	Regulation Key	Wall Edge Clip 1/32"(0.7MM) SPECIAL ORDER
separately. - Indicates not compatible with Series.		200 A000/17	146 mm	0 1 85 mm	220 mm			
		RS-ACC417	RS-ACC421	RS-ACC416	RS-ACC418	RS-ACC422	RS-ACC419	RS-ACC450
SPIRAL (P) SERIES	Gap Spacers Included	√	✓	-	_	1	1	✓
MAX (M) SERIES *	Gap Spacers Included	✓	√	✓	✓	✓	√	√

Sealer Best Practices

- The paver surface should be clean and free from oil, dirt, dust and any loose material. This ensures a uniform result and allows the sealer to better penetrate the surface.
- The pavers should be free of any visible efflorescence.
- If pavers have been sealed before, make sure to reseal with compatible product.
- Surface must be dry (48 hours without precipitation) and warm to the touch (morning).
- · Joint sand must also be dry.
- Make sure lawn sprinklers are shut off.
- Best air temperature is between 50 degrees to 80 degrees with no rain forecasted for the next 24 hours.
- It is best to apply product under constant weather conditions and use the same application method from start to finish.
- The paver joints should be completely filled with dry correctly-graded joint sand. The top level should not exceed the bottom of the chamfer or **1/8" below** the surface on the non-beveled or tumbled paver surface.
- Always test the product on a small hidden area to ensure the results will meet your expectations.
- Always show homeowners samples to ensure expectations.

At this point read all sealer instructions and determine the best sealer for your desired goal. Do you want to retain the original look, enhance the color, or stabilize the sand joint?

- Read application information as each sealer can be applied differently.
- Make sure you have the correct equipment based on type of sealer. Solvent based sealers need solvent resistant sprayers, watering cans or paint trays. Water base sealers can be generally applied using plastic equipment. Example: solvent based sealers come in metal containers and water based sealers come in plastic containers.
- Care should be taken that no excess sealer material is pooled on the surface during application always back roll. When using solvent based sealers make sure roller is solvent resistant or for all paints. Foam rollers work best and are less likely to pull sand from the joints.
- · Stabilizing sealers are generally sprayed or flood coated with a watering can, then back rolled.
- Acrylic non-stabilizing sealers can be sprayed, then back rolled or rolled on using a metal paint tray.
- Send your most experienced worker to do sealing projects.

Polysand Best Practices

- Ensure that paver surface has **proper drainage runoff** (Min 1" over 8'). Finished paver height should always be higher than grade to allow proper surface drainage.
- **Do not set pavers in limestone screenings.** This product holds moisture and does not meet the gradation, drainage qualities or strength of coarse concrete sand.
- Make sure payers are **clean of all construction dust**. Residual construction dust will haze payers!
- Compact pavers into setting bed to create proper interlock.
- Read and review all polysand manufacturers methods of application. (Read Directions)
- Don't rush polysand installation.
- Paver area must be completely dry.
- · Lay bags of polysand over paver area. Stage bags in areas of coverage. Example: one bag for 60 square feet.
- Do not over sweep sand. Sweep sand back and forth within coverage area to fill paver joints.
- Compact sand into joints. This is a must in achieving proper density of the sand joint (repeat 3 times). Compaction is critical to
 assuring sand strength.
- Do not fill sand above the chamfer of paver. Sand should sit 1/8" below bottom of chamfer.
- Use a fine-bristle broom to remove any excess sand from the paver surface.
- Use a **leaf blower** remove any sand or binder residue.
- Review all watering directions (each manufacturer has different watering instructions.) This is VERY IMPORTANT!
- Always start watering at the bottom of the slope.
- Always start watering in controlled areas per manufacturers recommendations. Example: complete watering in 200 sq. ft. area then
 move on to the next 200 sq. ft. and repeat.
- During final watering of poly sand, clean surface by removing excess water with leaf blower or squeegee depending on paver surface texture. This will remove any leftover binder residue or sand.
- Final thoughts Always be aware of the weather when installing poly sand. (Temperature and setting time ratings differ between products.)
- Refer to all manufacturers websites for installation videos.

Terms and Conditions of Sale

STANDARD TERMS

- 1. All orders are accepted subject to prevailing state or other taxes, and subject to applicable skid charges and the cost of freight applying at the time of shipment. Confirm prices at time of order as they are subject to change.
- 2. The acceptance by the seller of an order shall constitute a binding contract of purchase and sale, in accordance with the terms set out in this agreement.
- 3. These terms and conditions, together with the purchase order, form the complete contract, and there are no representations, warranties, or conditions expressed or implied, affecting this contract, other than as contained herein.
- 4. All sales are made in accordance with the seller's samples, which the purchaser has seen and approved. No quarantee of exact color shades is made.
- 5. Use of any delivered materials by or on behalf of the purchaser shall be deemed to constitute acceptance of the materials by the purchaser.
- 6. Excessive defective material picked up or delivered to the purchaser will be replaced free of charge if a claim is made within five days. Free replacement will be the extent of the seller's warranty. Any such claim will not constitute a reason for delaying payment. All other claims must be submitted within 30 days of purchase.
- 7. Unsuitable or unsatisfactory materials must be available for inspection by the seller to entitle the purchaser to any adjustment or credit. Skid returns will be posted to account next business day.
- 8. No materials may be returned for credit except with the written consent of the seller, whether such materials were ordered in excess of the purchaser's requirement, by mistake, or otherwise. Where the seller agrees to accept the return of goods, these goods are subject to freight charges and a restocking charge of 20% of their value. All goods must be returned in their original packaging. ACCESSORIES, SECTIONS AND OPENED MATERIAL ARE NONRETURNABLE FOR ANY REASON.
- 9. Seller does not accept responsibility for delays in deliveries due to fire, flood, strikes, or any other condition or contingencies beyond its control.
- 10. The purchaser is responsible for installation of the materials on the job site, and the seller has no responsibility in this regard.
- 11. All approved credit accounts are payable within thirty days of invoice. After 30 days, interest will be charged at 1.5%* per month (A.P.R.19.65%*), Calculated monthly on the balance owing at the beginning of the period. If purchaser defaults in the payment of any portion of amounts due on this account, the entire remaining unpaid balance shall, at the option of the seller, immediately become due and payable with collection costs incurred.
- 12. Skid deposits are non-refundable with 2 or more broken top boards or one main stringer board. If you have skids loaded onto your vehicle or receive a delivery with skids in this condition, you must have the Unilock representative (loader or truck driver) note the quantity on the shipping document paperwork. The responsibility of the return of empty skids for credit rests with the purchaser. There will be a net usage fee for all skids accepted for return. Skids picked up by Unilock in conjunction with a delivery by a Unilock truck will not be credited until returned to Unilock and sorted and verified by Unilock. Normal delivery charges will apply to requested skid pick-ups which do not coincide with a Unilock delivery to the site.
- 13. A sectioning charge of \$30.00 is applied to all items where bundles are split.

GENERAL TERMS

- 1. All prices are F.O.B. Aurora, IL, Marengo, IL or Elkhorn, WI. Please contact Unilock for all freight rates.
- 2. All C.O.D. orders must be paid by certified check, cash, or prior approved check. Cashier's checks are encouraged over cash due to COVID-19.
- 3. Contact Unilock for shipping schedules, rates, and conditions, and any fuel surcharges.
- 4. Configurations may vary from time to time due to mold design changes.
- 5. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80.00 per hour or fraction thereof. Similarly, delays incurred on partial delivery (1-7 bundles) in excess of one half hour will be billed to the purchaser at the same rate.
- 6. There is a mandatory \$26.00 skid deposit charge for the Standard Four Way Shipping Skids (SKID3842HERM, SKID2640HD & SKID), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.
- 7. There is a mandatory \$30 skid deposit charge for the following Wetcast Product Skids (SKIDPREM 1,2,3,4 & 5), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.
- 8. There is a mandatory \$34 skid deposit charge for all Canadian/Elegance Skids & Four Way 48" Solid Top Skids (SKIDLTD & SKIDSOLID48), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.


CUSTOM ORDERS

- 1. Custom Orders refer to nonstandard-inventoried items. Deposits of up to 100% of the order value (minimum of 20%) will be required. Minimum quantities apply on custom orders. Custom orders may be subject to a [500] sq.ft. over-run charge. Purchase orders as well as a signed special order release form will be required for custom material. Custom Orders will not be accepted for return.
- 2. All custom produced product must be shipped within 30 days of production. After 30 days all custom produced material will be subject to a storage fee of \$5.00 per pallet per month. Please contact your Territory Manager for more information.

CONFIRM ALL PRICES AS THEY ARE SUBJECT TO CHANGE


Laying Patterns

ARTLINE™




Artline A - 100% Random

BEACON HILL™ FLAGSTONE & BRISTOL VALLEY®




Beacon Hill Flagstone/Bristol Valley A - 40% Lg Rectangle, 40% Square, 20% Sm Rectangle



Beacon Hill Flagstone/Bristol Valley B - 40% Lg Rectangle, 40% Square 20% Sm Rectangle

BEACON HILL FLAGSTONE, BRISTOL VALLEY & UMBRIANO® XL




Beacon Hill Flagstone/Bristol Valley XL C - 67% Random Bundle, 33% XL

ECO-PRIORA™




Eco-Priora E - 100% Rectangle


BRUSSELS BLOCK®




Brussels P - 67% Standard, 33% Half




Brussels 0 - 67% Standard, 33% Half




Brussels X - 57% XL, 29% Standard, 14% Half



Brussels Y - 57% XL, 29% Standard, 14% Half




Brussels Z - 67% XL, 20% Standard, 13% Half




Brussels AF - 40% XL, 40% Standard, 20% Half

COPTHORNE®




Copthorne A - 100% Standard




Copthorne B - 100% Standard

COURTSTONE®




Courtstone A - 16% Square, 18% Sm Rectangle, 19% Rectangle, 22% Lg Rectangle, 25% XL Rect.

HOLLANDSTONE™ & HOLLAND PREMIER™




Hollandstone D - 100% 4"x8"




Hollandstone C - 100% 4"x8"

NATURAL STONE



Natural Stone C - 67% 24" x 24", 33% 12" x 24"




Natural Stone D - 57% 12" x 24", 43% 18" x 24"




Natural Stone F - 34% 24" x 36", 24% 24" x 24", 18% 18" x 24", 24% 12" x 24"

TRIBECA COBBLE™



Tribeca Cobble - 100% Random Bundle


WESTPORT™




Westport Random - 34% Large Rectangle, 40% Square, 26% Rectangle

Laying Patterns

ECO-PROMENADE®




EcoPromenade 3x12 RB A - Running Bond




EcoPromenade 3x12 DHB B-Double Herringbone


NORDIC COBBLE™



NordicCobble A - 11% Nordic Cobble 89% 12 x 24" Paver




NordicCobble Fan




NordicCobble Circle

SORENO™




Soreno 16x32 RB A-Running Bond

UMBRIANO® RANDOM




Umbriano Random A - 40% Large Rect., 40% Square, 20% Small Rect.




Umbriano Random B - 40% Large Rect., 40% Square, 20% Small Rect.

TRE0®




Treo R - 45% Large Rectangle, 35% Square, 20% Small Rectangle




Treo S - 45% Large Rectangle, 35% Square, 20% Small Rectangle

UMBRIANO®, BEACON HILL FLAGSTONE & BRISTOL VALLEY XL




Beacon Hill Flagstone/Bristol Valley XL G - 50% Random Bundle, 50% XL


RICHCLIFF®




Richcliff A - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff B - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff C - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"



Richcliff D - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff E - 44.6% Random Bundle, 55.4% Large Rectangle



Richcliff F - 44.6% Random Bundle, 55.4% Large Rectangle


ARCANA™



Arcana A - 44% 24" x 24", 33% 18" x 24", 23% 12" x 24"




Arcana C - 36% 24" x 24", 27% 18" x 24", 37% 12" x 24"




Arcana F - 67% 24" x 24", 33% 12" x 24",

SERIES™ 4x8




Series 4x8 HB G-Herringbone



Series 4x8 RB F-Running Bond


TOWN HALL®



Town Hall 4x10 DHB_B - Double Herringbone

2024 Freight Rates

Rates are based on a 0-50 mile radius from Aurora, IL, Marengo, IL & Elkhorn, WI facilities. Please contact the shipping department for all truckload rates and any questions concerning delivery. Approximately 14 bundles or 43,000 pounds per truckload. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80 per hour or a fraction thereof. Partial load deliveries in excess of one-half hour will be billed to the purchaser at the same rate. Fuel surcharge will be added to each order per guide below:



Cost of Fuel	Flat Surcharge
\$2.30 to \$2.79	\$27.00
\$2.80 to \$3.29	\$42.00
\$3.30 to \$3.79	\$51.00
\$3.80 to \$4.29	\$64.00
\$4.30 to \$4.79	\$78 .00
\$4.80 to \$5.29	\$93.00
\$5.30 to \$5.79	\$106.00

At Least	Less Than	Fuel Surcharge
\$2.30	\$2.79	5%
\$2.80	\$3.29	10%
\$3.30	\$3.79	15%
\$3.80	\$4.29	20%
\$4.30	\$4.79	25%
\$4.80	\$5.29	30%
\$5.30	\$5.79	35%

Fuel Surcharge for 0-50 miles only

Fuel Surcharge for deliveries over 50 miles

NOTE: Rates are based on current economic conditions and are subject to fuel surcharges, which will be based on the U.S. National Average Midwest rate of diesel fuel, calculated weekly. When the average price of fuel rises (or drops), the surcharge will take effect the following Monday. These rates can be located at www.eia.gov/petroleum/gasdiesel/.

IMPORTANT NOTES

SPECIAL ORDER PRODUCTS

Products listed as "Special Order" are not currently inventoried and may require additional lead times for manufacturing (or transfer from other Unilock locations). Prior to bidding or quoting projects, confirm Special Order unit pricing and minimum quantity requirements. A signed "Special Order Release Form" must be submitted prior to manufacturing and all material must begin shipping within 30 days of manufacturing date. Any Special Order products remaining at Unilock after 30 days will be subjected to a storage fee of \$5.00 per pallet per month. (Maximum storage is 3 months.) All quantities listed on the Special Order Release Form must ship and be paid in full. Please contact your Territory Manager for more information.

SPECIAL SAND GUIDANCE

EXTRA CARE must be exercised when using Polymeric Sand on the following products:

Copthorne® II Campo® Richcliff® Series™ Town Hall® Tribeca Cobble Umbriano™ Arcana Courtstone®

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

IMPORTANT COMPACTION NOTICE: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Please refer to each individual manufacturer for full instructions prior to install.

NATURAL STONE INSTALLATION GUIDELINES

A slurry coat, sometimes called a bond or milk sealer coat, is brushed on to the back of each natural stone unit prior to installation in order to limit moisture penetration, prevent staining and aid adhesion.

OPTIMAL COLOR BLENDING INSTALLATION

Blending colors from multiple (3+) bundles is ideal for the optimal color installaton. DO NOT LAY PALLET TO PALLET!

IMPORTANT NOTES continued

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee* on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Umbriano* is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2024 Hengestone Holdings, Inc.

UNILOCK® QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS - Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. While EasyClean helps to increase a paver's resistance to staining from various substances, it does not make our products stain-proof nor does it resist every kind of stain. The Unilock warranty also does not cover deterioration or damage as a result of

poor design or poor installation practices that are contrary to specifications as laid out by ICPI (Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www. icpi.org and www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

MAINTENANCE ADVISORY

1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit Unilock.com to register for your Transferable Lifetime Guarantee.

2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts - The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

COLOR ADVISORY

1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color. Note: Unilock Natural Stone variations are outside the control of Unilock. Purchasers of natural stone must be willing to accept this inherent variability.

2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

INSTALLATION ADVISORY

1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

CHICAGO PRODUCT DIRECTORY

UNIT PAVERS

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
ADA Paver	4	S	~				
Anchorlock™	5	S	•		✓		
Arcana™	6	SM	~				
Artline™	7	М	~	✓			
Beacon Hill™ Flagstone	10	F	~				
Beacon Hill™ Smooth	12	SM	~				
Bristol Valley®	14	F	~				
Brussels Block®	16	W	~	✓			✓
Copthorne®	17	Т	~	•			✓
Courtstone®	18	С	•	✓			✓
Eco-Line®	19	М	•	•	✓	•	✓
Eco-Optiloc™	20	М	•	•	✓	✓	
Eco-Priora™	21	М	~	✓	✓	✓	
Eco-Promenade®	22	М	•	✓	✓	✓	
Promenade™ EcoTerra	23	SM	~	•			
Granito™	24	S	~	•	•		
Hex™	25	S	~	•		✓	
Hollandstone™	26	S	~	✓	✓		✓
Holland Premier™	28	S	~	•			~
Mattoni™	29	SM	~	✓			✓
Natural Stone	30	SM	~				
Nordic Cobble™	34	WS	~	✓	✓	✓	✓
Optiloc°	35	М	~	•	✓		
Porcelain	36	SM	~				
Promenade®	39	М	~	•	✓		~
Richcliff®	41	Т	~	✓			✓
Series™	42	ws	~	•	✓		✓
Skyline™	44	S	•				
Soreno™	45	SM	~				
Town Hall*	46	Т	•	•	✓	✓	✓
Treo® Smooth	47	SM	~	•		•	•
Tribeca Cobble	48	WS	•	•	✓	✓	✓
Turfstone™	49	S		•	✓	•	
Umbriano™	50	SZ	•	•	✓	✓	~
Westport™	52	Т	~	•			~

RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional Stone®	54	W	✓		✓	~	~
DuraHold®	55	SM		✓	•	✓	
Estate Wall™	56	SP/W	~	•	•	•	•
Lineo™ Dimensional Stone	57	SM	~		✓	~	•
Mackinaw™	58	SP	~	•		•	
Olde Quarry™	59	W	~	✓	✓	✓	~
Olde Quarry™ Smooth	60	SM	~	•	•	•	•
Pisa™	61	SP	~	✓	•	~	•
Pisa [™] Smooth XL	62	SM	~	•	✓	•	•
Rivercrest®	63	S	~	✓	✓	✓	✓
SienaEdge™	64	SM	~	•	✓	•	
SienaStone®	65	SP		•	✓		
U-Cara®	67	М	✓	•	•	•	-

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed. This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

ADD 3D LANDSCAPE DESIGN TO YOUR TOOLBOX







UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.

SCAN THE QR CODE FOR
MORE INFORMATION OR TO
DOWNLOAD A FREE 30-DAY TRAIL
OF UVISION 3D LANDSCAPE CREATOR.





Let's

BUILD YOUR BUSINESS TOGETHER.

CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO **CONNECT WITH YOUR LOCAL TERRITORY MANAGER**



(508) 278-4536

CHICAGO

(630) 892-9191

MILWAUKEE

(262)742-3890

KANSAS

(913) 417-7985

MICHIGAN

(248) 437-7037

NEW YORK (845) 278-6700

MID-ATLANTIC

(202) 798-2060

ONTARIO

(416) 646-9000

CINCINNATI/KY/TN (513) 202-0219

OHIO/WESTERN PA/

