





TRANSFORMING HARDSCAPES

# **JNILOCK®**

# THE **ONE** INNOVATOR WITH GAME-CHANGING PRODUCTS

### **BUILD VERTICALS FASTER**

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features in hours – not days!

Simply build the sturdy, aluminum frame in any configuration and choose from a wide selection of fascia panels to clad it with.











# TABLE OF CONTENTS - CHICAGO

# PAVERS

ADA Paver4
Anchorlock™
Arcana™ <b>6</b>
Artline™ II Campo°
Artline™Smooth
Artline <sup>™</sup> Umbriano <sup>®</sup>
Beacon Hill™ Flagstone 10
Beacon Hill™ Smooth
Bristol Valley®
Brussels Block® 16
Copthorne°
Courtstone°
Eco-Line® 19
Eco-Optiloc™ <b>20</b>
Eco-Priora <sup>™</sup>
Eco-Promenade® 22
Promenade EcoTerra <sup>™</sup>
Granito <sup>™</sup> 24
Hex <sup>™</sup> <b>25</b>
Hollandstone <sup>™</sup>
Holland Premier™ 28
Mattoni™ 29
Natural Stone - Limestone 30
Natural Stone - Sandstone
Nordic Cobble™ <b>34</b>
Optiloc°
Porcelain
Promenade <sup>™</sup> 39
Richcliff® 41
Series <sup>™</sup> 42
Skyline™ 44
Soreno™ 45
Town Hall°
Treo® Smooth 47
Tribeca Cobble <sup>™</sup>
Turfstone™ 49
Umbriano™
Westport <sup>™</sup> 52
Westport <sup>™</sup> Smooth 53

### **RETAINING WALLS**

Brussels Dimensional Stone®	54
DuraHold®	55
Estate Wall™	56
Lineo™ Dimensional Stone	57
Mackinaw™	58
Olde Quarry <sup>™</sup>	59
Olde Quarry <sup>™</sup> Smooth	60
Pisa™	61
Pisa <sup>™</sup> Smooth XL	62
Rivercrest® Wall	63
SienaEdge <sup>™</sup>	64
SienaStone™	65
U-Cara® Multiface Wall System	67
U-Cara® Modular System	72
U-Cara® Wall Mount System	73
Architectural Coping	74
Brussels Fullnose <sup>™</sup>	75
6x12 Fullnose	76
Ledgestone™	77
Umbriano® Coping	79
Universal U-Grip <sup>™</sup> Base	80

### FIRE FEATURES

Sunset Firepit	81
Unilock Elements	82

### **ACCESSORIES**

Paver Cleaners and Adhesives	84
Paver Sealers and Sand Products	. 85
Permeable Chip Products	. 86
Geotextiles and Fabric Products	86
Gator Base System	. 87
Edging & Stainless FP Insert	. 88
Unilock Pedestal System	. 89

### PRODUCT AND INSTALLATION INFORMATION

Sealer and Polysand Best Practices	90
Terms and Conditions of Sale	91
Laying Patterns	92
Freight Rates	94
Important Notes	94
Product Directory	98

### **APPLICATION INDEX**





Light vehicular



Pedestrian







Roadways-

ways- Permeable

Outdoor kitchen







Fire feature











Borders & accents







Structural wall Garden wall Pillar







Wall Coping Pool coping Step treads



### **DESCRIPTION OF EDGE DETAILS**





Zero-Edge





Rounded Bevel

Micro Bevel

ADA Paver CLASSIC



### **APPLICATIONS**







### **APPEARANCE**

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

# TECHNOLOGIES CLASSIC

Budget-friendly traditional product mix

### **DRIVE FRIENDLY**

Can handle vehicular loads

### **TECHNICAL INFORMATION**

Conforms to ASTM C936 Eligible for LEED v4.1 credits

	12 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.04
	Layer	11.63
	Sections	-
	Stone	0.97

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Sections	-
	Layer	11.81
	Bundle	94.49

	SqFt	1.02
SAILOR LNFT PER	Sections	-
SAILOR ENFT PER	Layer	11.81
	Bundle	94.49

	SqFt	1.03
UNITS PER	Sections	-
	Bundle	96.00

	Layer	389
LBS PER	Sections	-
	Bundle	3,114

COLORS	Reflectance	Stock
Charcoal	SR n/a SRI n/a	S0
Red	SR n/a SRI n/a	S0



COMMERCIAL

Single Unit



**STANDARD**300 x 300 x 70mm
11% x 11% x 2 ¾
96 units/Bundle
.97 Sq.Ft./Stone

Anchorlock<sup>™</sup> CLASSIC



### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

# TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix


### **DRIVE FRIENDLY**

Can handle vehicular loads

### **TECHNICAL INFORMATION**

Conforms to ASTM C936 Eligible for LEED v4.1 credits

### LAYING PATTERN



Anchorlock A

	8 % x 8 %
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 MM

SQFT PER	Bundle	86.72
	Layer	10.84
	Sections	-
	Stone	0.41

PER BUNDLE	Layers	8.00
	Sections	-

	SqFt	-
SOLDIER LNFT PER	Sections	-
SOLDIER LNF1 PER	Layer	-
	Bundle	-

	SqFt	-
SAILOR LNFT PER	Sections	-
SAILOR LINFT PER	Layer	-
	Bundle	-

UNITS PER	SqFt	2.46	
	Sections	-	
	Bundle	213.36	

	Layer	374
LBS PER	Sections	-
	Bundle	2,991

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO

05

Single Unit



**STANDARD**225 x 225 x 80mm
8 % x 8 % x 3 %
213.36 units/Bundle
.41 Sq.Ft./Stone





		12 x 24	18 x 24	24 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	50 MM	50 MM	50 MM
SQFT PER	Bundle	36.00	54.00	72.00
	Layer	4.00	6.00	8.00
	Sections	-	-	-
	Stone	2.00	3.00	4.00
	·			





### **APPEARANCE**

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

### EASYCLEAN™ (1)



Factory sealed to provide integral stain resistance


### **TECHNICAL INFORMATION**

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

PER BUNDLE	Layers	9.00	9.00	9.00
	Sections	-	-	-
	SqFt	0.49	0.50	0.50
SOLDIER LNFT PER	Sections	-	-	-
JOLDIEK ENI I FER	Layer	1.98	2.97	3.98
	Bundle	17.78	26.75	35.79
	SqFt	0.99	0.66	0.50
SAILOR LNFT PER	Sections	-	-	-
SAILOR LINFT PER	Layer	3.98	3.98	3.98
	Bundle	35.79	35.79	35.79
	SqFt	0.50	0.33	0.25
UNITS PER	Sections	-	-	-
	Bundle	18.00	18.00	18.00
		00	444	400
	Layer	96	144	192
LBS PER	Sections	-	-	-
	Bundle	864	1,296	1,728

COLORS	Reflectance	Stock	Stock	Stock
Avorio	SR .56 SRI 66	✓	<b>✓</b>	<b>✓</b>
Corvara	SR n/a SRI 34	✓	1	✓
Modena	SR n/a SRI 53	✓	1	✓
Vivanto	SR n/a SRI 16	1	1	1

### **LAYING PATTERNS**



Arcana Random C





X & T Slab Spacers Bagged Separately

(see page 86)





CONTRACTORS

COMMERCIAL







24 x 24 606 x 606 x 50mm 23% x 23% x 2" 18 units/Bundle 4 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Unilock recommends installing Arcana using X & T Slab Spacers. Please see page 86. Contact Unilock for more information.

# Artline™ II Campo® Finish





#### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Micro Surface Texture - II Campo Joint Spacing - 3 mm

### TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERN



Artline Random A

7 Unit Random Bundle

7 Unit Random Bundle

Bun	dle Type	RANDOM
Plant	Produced	CHICAGO
Thickn	ess (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

	SqFt	-
UNITS PER	Sections	-
	Bundle	192.00

	Layer	370
LBS PER	Sections	-
	Bundle	2,963

ı	COLORS	Reflectance	Stock
	Bavarian Blend	SR n/a SRI n/a	✓
	Granite Blend	SR n/a SRI n/a	✓





CONTRACTORS

COMMERCIAL



**UNIT A**125 x 169 x 70mm
4 % x 6 % x 2 %"
32 units/Bundle
.23 Sq.Ft./Stone



**UNIT B**125 x 262.5 x 70mm
4% x 10 % x 2 ¾"
32 units/Bundle
.35 Sq.Ft./Stone



**UNIT C**125 x 337.5 x 70mm
4 % x 13 % x 2 ¾"
32 units/Bundle
.45 Sq.Ft./Stone



**UNIT D**125 x 450 x 70mm
4 % x 17 ¾ x 2 ¾"
32 units/Bundle
.61 Sq.Ft./Stone



UNIT E 187.5 x 225 x 70mm 7½ x 8% x 2¾" 32 units/Bundle .45 Sq.Ft./Stone



UNIT F 187.5 x 337.5 x 70mm 7½ x 13¾ x 2¾" 16 units/Bundle .69 Sq.Ft./Stone



UNIT G 187.5 x 450 x 70mm 7½ x 17 ¾ x 2 ¾" 16 units/Bundle .91 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

# Artline™ Smooth Finish





#### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 3 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

### EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance

### COMFORT STEP



Ultra smooth surface texture

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

	SqFt	-
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	-
	Bundle	-

	SqFt	-
UNITS PER	Sections	-
	Bundle	192.00

	Layer	370
LBS PER	Sections	•
	Bundle	2,963

COLORS	Reflectance	Stock
Bavarian Blend	SR n/a SRI n/a	/
Fossil	SR n/a SRI 21	<b>✓</b>
Steel Mountain	SR n/a SRI 32	/

#### LAYING PATTERN



Artline Random A



125 x 169 x 70mm 4 1/8 x 6 3/4 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone

**UNIT A** 



UNIT B 125 x 262.5 x 70mm 4 1/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone



CONTRACTORS



COMMERCIAL



125 x 337.5 x 70mm 4 1/8 x 13 3/8 x 2 3/4" 32 units/Bundle

.45 Sq.Ft./Stone





.61 Sq.Ft./Stone

UNIT E 187.5 x 225 x 70mm 7½ x 8% x 2¾" 32 units/Bundle

.45 Sq.Ft./Stone



UNIT F 187.5 x 337.5 x 70mm  $7\frac{1}{2} \times 13\frac{3}{8} \times 2\frac{3}{4}$ " 16 units/Bundle .69 Sq.Ft./Stone



Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

.91 Sq.Ft./Stone

# Artline<sup>™</sup> Umbriano<sup>®</sup> Finish





### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

### EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance

### COLORFUSION™

Subtly mottled colored finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	70 MM

SQFT PER	Bundle	93.25
	Layer	11.66
	Sections	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

	SqFt	-	
SAILOR LNFT PER	Sections	-	
SAILOR LINFT PER	Layer	-	
	Bundle	-	

	SqFt	-	
UNITS PER	Sections	-	
	Bundle	192.00	

	Layer	373
LBS PER	Sections	-
	Bundle	2,986

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	/
Midnight Sky	SR .17 SRI 15	/
Winter Marvel	SR .35 SRI 38	/

#### **LAYING PATTERN**



Artline Random A



125 x 169 x 70mm 4 1/8 x 6 3/4 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone



**UNIT B** 125 x 262.5 x 70mm 4 1/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone



CONTRACTORS



COMMERCIAL





UNIT C 125 x 337.5 x 70mm 4 1/8 x 13 3/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone



UNIT D 125 x 450 x 70mm  $4\% \times 17\% \times 2\%$ 32 units/Bundle .61 Sq.Ft./Stone



**UNIT E** 187.5 x 225 x 70mm  $7\frac{1}{2} \times 8\frac{3}{8} \times 2\frac{3}{4}$ " 32 units/Bundle .45 Sq.Ft./Stone



UNIT F 187.5 x 337.5 x 70mm  $7\frac{1}{2} \times 13\frac{3}{8} \times 2\frac{3}{4}$ " 16 units/Bundle .69 Sq.Ft./Stone



UNIT G 187.5 x 450 x 70mm  $7\frac{1}{2} \times 17\frac{3}{4} \times 2\frac{3}{4}$ " 16 units/Bundle .91 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid .Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

# Beacon Hill™ Flagstone 60mm





### **APPLICATIONS**



#### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 3 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color


### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


### LAYING PATTERNS



BeaconHill Fixed Random A



BeaconHill Fixed Random B



BeaconHill Multi-Unit Random C

			XL UNIT
	Bundle Type	RANDOM	SINGLE
	Plant Produced	MARENGO	MARENGO
	Thickness (mm)	60 MM	60 MM
	Bundle	116.57	116.57
COST DED	Layer	11.66	11.66
SQFT PER	Section	-	-
	Stone	-	5.83
DED DUMBLE	Layers	10.00	10.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.32
	Section	_	-
SOLDIER LNFT PER	Layer	-	3.74
	Bundle	-	37.40
	SqFt	0.80	0.53
	Section	-	- 0.00
SAILOR LNFT PER	Layer	9.35	6.23
	Bundle	93.50	62.30
	SqFt	-	0.17
UNITS PER	Section	-	-
	Bundle	80.00	20.00
	Layer	322	324
LBS PER	Section	-	-
	Bundle	3,221	3,241

COLORS	Reflectance	Stock	Stock
Alpine Grey	SR n/a SRI n/a	/	/
Bavarian	SR n/a SRI n/a	/	<b>✓</b>
Fossil	SR n/a SRI n/a	<b>✓</b>	/
Walnut	SR n/a SRI n/a	/	-



CONTRACTORS



COMMERCIAL



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



**SMALL RECTANGLE** 380 x 190 x 60mm 15 x 7½ x 23/8" 30 units/Bundle .69 Sq.Ft./Stone



**XL UNIT** 950 x 570 x 60mm 371/2 x 221/2 x 23/8" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Single Unit

# Beacon Hill™ Flagstone 80mm





### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Textured Joint Spacing - 3 mm

### TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color


### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS







BeaconHill Fixed Random B

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

	Bundle	81.60
SOET DED	Layer	11.66
SQFT PER	Section	-
	Stone	-

PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-

	SqFt	-
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	-
	Bundle	-

	SqFt	0.80
SAILOR LNFT PER	Section	-
SAILUR LIFT PER	Layer	9.35
	Bundle	65.45

	SqFt	-
UNITS PER	Section	-
	Bundle	56.00

	Layer	426	
LBS PER	Section	-	
	Bundle	2,979	

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	✓ <b>/</b>
Walnut	SR n/a SRI n/a	✓ <b>/</b>







COMMERCIAL

Unit Random Bundle



**LARGE RECTANGLE** 380 x 570 x 80mm 15 x 22 ½ x 3 ½ " 14 Units/Bundle 2.08 SqFt/Stone



**SQUARE**380 x 380 x 80mm
15 x 15 x 3 1/8"
21 units/Bundle
1.39 Sq.Ft./Stone



**SMALL RECTANGLE** 380 x 190 x 80mm 15 x 7½ x 3½" 21 units/Bundle .69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.







#### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

**EASYCLEAN™** (Champagne and Opal)

Factory sealed to provide integral stain resistance

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS







BeaconHill Fixed Random B

			SMALL RECTANGLE	XL UNIT
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	MARENGO	MARENGO	MARENGO
	Thickness (mm)	60 MM	60 MM	60 MM
	Bundle	116.57	116.57	116.57
SQFT PER	Layer	11.66	11.66	11.66
SUFFER	Sections	-	-	-
	Stone	-	0.78	5.83
PER BUNDLE	Layers	10.00	10.00	10.00
PER BUNDLE	Sections	-	-	-
	SqFt	-	0.80	0.32
SOLDIER LNFT PER	Sections	-	-	-
SOLDIER LINFT PER	Layer	-	9.35	3.74
	Bundle	-	93.50	37.40
	SqFt	0.80	1.60	0.53
SAILOR LNFT PER	Sections	-	-	-
SAILOR LNF1 PER	Layer	9.35	18.70	6.23
	Bundle	93.50	187.01	62.30
	SqFt	-	1.29	0.17
UNITS PER	Sections	-	-	-
	Bundle	80.00	150.00	20.00
	Layer	322	315	325
LBS PER	Sections	-	-	-
	Bundle	3,216	3,150	3,249

COLORS	Reflectance	Stock	Stock	Stock
Bavarian	SR n/a SRI n/a	✓	/	✓
Dark Charcoal	SR n/a SRI n/a	-	✓ <b>/</b>	-
Fossil	SR .22 SRI 21	✓ <b>/</b>	-	✓ <b>/</b>
Granite Fusion	SR .28 SRI 29	✓ <b>/</b>	<b>✓</b>	✓ <b>/</b>
Ivory	SR n/a SRI n/a	-	<b>✓</b>	-
Champagne 😈	SR n/a SRI n/a	✓	/	<b>✓</b>
Opal Blend 😈	SR n/a SRI n/a	✓	-	✓



CONTRACTORS



COMMERCIAL

Unit Random Bundle



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



**SQUARE** 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone




**SMALL RECTANGLE** 380 x 190 x 60mm 15 x 71/2 x 23/8" 30 units/Bundle .69 Sq.Ft./Stone



Single Unit

**SMALL RECTANGLE** 380 x 190 x 60mm  $15 \times 7 \frac{1}{2} \times 2\frac{3}{8}$ " 150 Units/Bundle .78 Sq.Ft./Stone



**XL UNIT** 950 x 570 x 60mm 37½ x 22½ x 23%" 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

# Beacon Hill™ Smooth 80mm





### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

**EASYCLEAN™** (Opal Only)



Factory sealed to provide integral stain resistance


### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS







BeaconHill Fixed Random B

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

SQFT PER	Bundle	81.60
	Layer	11.66
	Section	-
	Stone	-

PER BUNDLE	Layers	7.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

	SAILOR LNFT PER	SqFt	0.80
		Section	-
		Layer	9.35
		Bundle	65.45

	SqFt	-
UNITS PER	Section	-
	Bundle	56.00

	Layer	426	
LBS PER	Section	-	
	Bundle	2,982	

COLORS	Reflectance	Stock
Bavarian	SR .22 SRI 21	✓
Fossil	SR .28 SRI 29	SO
Granite Fusion	SR .28 SRI 29	✓
Opal Blend 😈	SR .28 SRI 29	SO







COMMERCIAL

Random Bundle



LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 1/8" 14 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 80mm 15 x 15 x 3 1/8" 21 units/Bundle 1.39 Sq.Ft./Stone



SMALL RECTANGLE 380 x 190 x 80mm 15 x 7½ x 3½" 21 units/Bundle .69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.







### **APPEARANCE**

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

### EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance

### COMFORT STEP




Ultra smooth surface texture

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS



Bristol Valley Random A Bristol Valley Random B

			XL UNIT
	Bundle Type	RANDOM	SINGLE
	Plant Produced	MARENGO	MARENGO
	Thickness (mm)	60 MM	60 MM
	Bundle	116.57	116.57
	Layer	11.66	11.66
SQFT PER	Section	-	-
	Stone	-	5.83
	Layers	10.00	10.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.32
	Section	_	-
SOLDIER LNFT PER	Layer	-	3.74
	Bundle	-	37.40
	SqFt	0.80	0.53
	Section	-	-
SAILOR LNFT PER	Layer	9.35	6.23
	Bundle	93.50	62.30
	SqFt	-	0.17
UNITS PER	Section	-	-
	Bundle	80.00	20.00
	Layer	330	321
LBS PER	Section	-	-
	Bundle	3,302	3,210

COLORS	Reflectance	Stock	Stock
Bavarian	SR n/a SRI n/a	/	✓
Fossil	SR n/a SRI n/a	/	<b>✓</b>
Steel Mountain	SR n/a SRI n/a	<b>✓</b>	<b>✓</b>
Walnut	SR n/a SRI n/a	/	-





CONTRACTORS

COMMERCIAL

Unit Random Bundle

M



LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 Units/Bundle 2.08 SqFt/Stone



**SOUARE** 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone



**SMALL RECTANGLE** 380 x 190 x 60mm 15 x 7 ½ x 2 3/8" 30 units/Bundle .69 Sq.Ft./Stone



**XL UNIT** 950 x 570 x 60mm  $37\frac{1}{2} \times 22\frac{1}{2} \times 2\frac{3}{8}$ " 20 units/Bundle 5.83 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Single Unit

# Bristol Valley® 80mm





### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

### EASYCLEAN™ (i)



Factory sealed to provide integral stain resistance

### COMFORT STEP





Ultra smooth surface texture

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS





Bristol Valley Random A Bristol Valley Random B

Bundle Type	RANDOM
Plant Produced	MARENGO
Thickness (mm)	80 MM

	Bundle	81.60
SQFT PER	Layer	11.66
SQFIPER	Sections	-
	Stone	-

PER BUNDLE	Layers	7.00
PER DUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
SOLDIER LINFT PER	Layer	-
	Bundle	-

	SqFt	0.80
SAILOR LNFT PER	Sections	-
SAILOR LINFT PER	Layer	9.35
	Bundle	65.45

	SqFt	-	
UNITS PER	Sections	-	
	Bundle	56.00	

	Layer	418	
LBS PER	Sections	-	
	Bundle	2,925	

COLORS	Reflectance	Stock
Bavarian	SR n/a SRI n/a	✓
Fossil	SR n/a SRI n/a	SO
Steel Mountain	SR n/a SRI n/a	✓





CONTRACTORS

COMMERCIAL

Unit Random Bundle



LARGE RECTANGLE 380 x 570 x 80mm 15 x 22 ½ x 3 1/8" 14 Units/Bundle 2.08 SqFt/Stone



SQUARE 380 x 380 x 80mm 15 x 15 x 3 1/8" 21 units/Bundle 1.39 Sq.Ft./Stone



**SMALL RECTANGLE** 380 x 190 x 80mm 15 x 7 ½ x 3 1/8" 21 units/Bundle 69 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.











### **APPEARANCE**

Edge Detail - Zero Surface Texture - Weathered Joint Spacing - 2 mm

# TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix

### ANTIQUED™

Distressed, timeworn finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


### LAYING PATTERNS







Brussels Multi-Unit Random AE



Brussels Multi-Unit Random AD

		HALF	STANDARD	XL
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	EL	KHORN / CHICAG	GO
	Thickness (mm)	70 MM	70 MM	70 MM
	Bundle	88.70	94.91	95.70
COST DED	Layer	11.09	11.86	9.57
SQFT PER	Sections	12.67	15.82	31.90
	Stone	0.20	0.40	0.80
DED DUNDLE	Layers	8.00	8.00	10.00
PER BUNDLE	Sections	7.00	6.00	3.00
	SqFt	1.72	1.44	0.86
aci piep i viet pep	Sections	21.84	22.70	27.30
SOLDIER LNFT PER	Layer	19.11	17.03	8.19
	Bundle	152.86	136.22	81.89
	SqFt	2.87	1.73	1.43
	Sections	36.33	27.30	45.67
SAILOR LNFT PER	Layer	31.78	20.47	13.70
	Bundle	254.28	163.78	137.01
	SqFt	5.05	2.53	1.25
UNITS PER	Sections	64.00	40.00	40.00
	Bundle	448.00	240.00	120.00
	Layer	358	389	311
LBS PER	Sections	409	518	1,037
	Bundle	2,865	3,110	3,112

COLORS	Reflectance	Stock	Stock	Stock
Limestone	SR .28 SRI 29	1	✓	/
River	SR n/a SRI 34	1	✓	/
Sandstone	SR .41 SRI 46	✓	✓	/
Sierra	SR n/a SRI n/a	1	✓	1



 ${\tt CONTRACTORS}$ 



COMMERCIAL





HALF 104 x 173 x 70mm 4 x 6% x 2 3/4" 448 units/Bundle .20 Sq.Ft./Stone



**STANDARD** 173 x 208 x 70mm 6% x 8½ x 2¾" 240 units/Bundle .40 Sq.Ft./Stone



**XL** 208 x 348 x 70mm 81/4 x 13 3/4 x 2 3/4" 120 units/Bundle .80 Sq.Ft./Stone

# Copthorne<sup>®</sup>





### **APPLICATIONS**









### **APPEARANCE**

Surface Texture - Textured Joint Spacing - 3 mm

### **TECHNOLOGIES** ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

Cast from historic street pavers

### $\textbf{ULTIMA}^{\text{TM}}$

Up to 4x stronger than poured-in-place concrete

### EASYCLEAN™ 🕕



Factory sealed to provide integral stain resistance

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS





Copthorne BW A

Copthorne RB C

	Bundle Type	SINGLE
Plant Produced		AYR
	Thickness (mm)	60 MM
	Bundle	89.20
	Layer	11.15
SQFT PER	Sections	_
	Stone	0.15
	Lauran	8.00
PER BUNDLE	Layers	8.00
	Sections	-
	SqFt	1.43
SOLDIER LNFT PER	Sections	-
SOLDIER LNFT PER	Layer	15.99
	Bundle	127.95
	SqFt	4.41
	Sections	4.41
SAILOR LNFT PER		49.21
	Layer	393.70
	Bundle	393.70
	SqFt	6.73
UNITS PER	Sections	-
	Bundle	600.00
	Layer	294
LBS PER	Sections	
LD3 PEK	Bundle	2,349

1	COLORS	Reflectance	Stock
	Artic Grey	SR 49 SRI 57	<b>✓</b>
	Basalt	SR n/a SRI n/a	<b>✓</b>
	Burgundy Red	SR n/a SRI 38	<b>✓</b>
	Burnt Clay	SR n/a SRI 40	/
	Old Oak	SR n/a SRI 41	/
	Steel Blue	SR n/a SRI n/a	/





CONTRACTORS

COMMERCIAL

Single Unit



STANDARD 65 x 200 x 60mm 25/8 x 7 1/8 x 2 3/8" 600 Units/Bundle .15 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 90. Contact Unilock for more information.



**RANDOM** 



#### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 15 mm

### TECHNOLOGIES ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

### REALA™

Cast from European cobblestones

#### ULTIMA™

Up to 4x stronger than poured-in-place concrete

### EASYCLEAN™ (1)

Factory sealed to provide integral stain resistance

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS

Courtstone Random A

1





**LARGE RECTANGLE**185 x 130 x 60mm
7% x 5 x 2% "
64 Units/Bundle
.28 SqFt/Stone



RECTANGLE 165 x 130 x 60mm 6½ x 5 x 2¾" 64 Units/Bundle .23 SqFt/Stone



**SMALL RECTANGLE** 145 x 130 x 60mm 5 x 5 34 x 2 3/6" 64 Units/Bundle .20 SqFt/Stone



**SQUARE** 130 x 130 x 60mm 5x 5 x 2 3/6" 64 Units/Bundle .18 SqFt/Stone

#### 

Sections Stone **Bundle Type** 

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Sections	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	2.25
	Sections	-
	Layer	27.69
	Bundle	221.52

	SqFt	-
UNITS PER	Sections	-
	Bundle	384.00

	Layer	291
LBS PER	Sections	-
	Bundle	2,326

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	✓



CONTRACTORS




COMMERCIAL

Bundle

Random

Unit



### CLASSIC / ENDURACOLOR®

**RANDOM** 

55.17

11.03

5.00

160.00

513

2,564

Stock

S0

MULTI-PLANT 100 MM

**Bundle Type** 

Plant Produced

Thickness (mm)

Bundle Layer

Sections Stone Layers

Sections SqFt Sections

Layer

Bundle

SqFt

Layer Bundle

SqFt

Layer

Sections

Bundle

Please contact your local Sales Representative for color options.

Reflectance

SR n/a SRI n/a

Sections Bundle

Sections

**SQFT PER** 

PER BUNDLE

**SOLDIER LNFT PER** 

SAILOR LNFT PER

**UNITS PER** 

LBS PER

COLORS

Custom Colors & Finishes



### **APPLICATIONS**











### **APPEARANCE**

Edge Detail - Micro Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 6.25 mm Void - 5.80%

### **TECHNOLOGIES PERMEABLE**

Can be installed to allow water to flow through

#### ENDURACOLOR™

Refined surface and long-lasting color

**EASYCLEAN™** (Umbriano)



Factory sealed to provide integral stain resistance

### **COLOR FUSION™** (Umbriano)

Subtly mottled color finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS



Ecoline Fixed Random A



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



**Exposed Granite Finish** 



SMOOTH Premier Finish



Mottled Finish with/ ColorFusion and EasyClean



Pii

**UNIT A** 357 x 84 x 100mm  $14 \times 3 \% \times 3\%$ " 20 Units/Bundle .32 SqFt/Stone



UNIT B 317 x 84 x 100mm 12 1/2 x 3 3/8 x 3 7/8" 20 Units/Bundle .29 SqFt/Stone



**UNIT C** 277 x 84 x 100mm  $10\% \times 3\% \times 3\%$ " 20 Units/Bundle .25 SqFt/Stone



UNIT D 237 x 84 x 100mm  $9\% \times 3\% \times 3\%$ " 20 Units/Bundle .21 SqFt/Stone



UNIT E 357 x 114 x 100mm 14 x 4 ½ x 3 1/8" 20 Units/Bundle .44 SqFt/Stone



**UNIT F** 317 x 114 x 100mm 12 1/2 x 4 1/2 x 3 7/8" 20 Units/Bundle .39 SqFt/Stone



277 x 114 x 100mm 10 % x 4 ½ x 3 %" 20 Units/Bundle .34 SqFt/Stone



UNIT H 237 x 114 x 100mm  $9\frac{3}{8} \times 4\frac{1}{2} \times 3\frac{7}{8}$ " 20 Units/Bundle .29 SqFt/Stone



### CLASSIC / ENDURACOLOR

**ALL FINISHES** 



### APPLICATIONS











#### **APPEARANCE**

Edge Detail - Chamfer Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 7mm Void – 7.3%

### **TECHNOLOGIES PERMEABLE**

Can be installed to allow water to flow through

### ENDURACOLOR™

Refined surface and long-lasting color

**EASYCLEAN™** (Umbriano)

Factory sealed to provide integral stain resistance

### COLOR FUSION™ (Umbriano)

Subtly mottled color finish

### **TECHNICAL** INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### **LAYING PATTERNS**



EcoOptiloc Cluster A

Bundle Type		SINGLE
	Plant Produced	MULTI-PLANT
	Thickness (mm)	80 MM
	Bundle	84.80
COST DED	Layer	10.60
SQFT PER	Sections	-
	Stone	0.50
DED DUNDI E	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	-
OOLDIED LAIFT DED	Sections	-
SOLDIER LNFT PER	Layer	-
	Bundle	-
	SqFt	-
CALLOD LINET DED	Sections	-
SAILOR LNFT PER	Layer	-
	Bundle	-
	SqFt	1.98
UNITS PER	Sections	-
	Bundle	168.00
	Layer	358
LBS PER	Sections	-
	Bundle	2,860

Reflectance

Please contact your local Sales Representative for color options.

SR n/a SRI n/a



Stock

SO

COMMERCIAL



CLASSIC Thrumix Finish



COLORS

Custom Colors & Finishes

IL CAMPO® Brushed Finish



SERIES™ **Exposed Granite Finish** 



HTOOM2 Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

Single Unit



**STANDARD** 250 x 250 x 80mm 9 % x 9 % x 3 1/8" 168 Units/Bundle .50 SqFt/Stone





### CLASSIC / ENDURACOLOR®



#### **APPLICATIONS**











### **APPEARANCE**

Edge Detail - Micro Surface Texture - Smooth / Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 7mm Void - 4.6-7.08%

### **TECHNOLOGIES**

**CLASSIC** 

Budget-friendly traditional product mix

#### **PERMEABLE**

Can be installed to allow water to flow through

### ENDURACOLOR™

Refined surface and long-lasting color

**EASYCLEAN™** (Umbriano)



Factory sealed to provide integral stain resistance

### COLOR FUSION™ (Umbriano)

Subtly mottled color finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS

See laying patterns on page 92.

		CLASSIC	ENDURACOLOR
Bundle Type		SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	80 MM	80 MM
	Bundle	75.95	75.95
SQFT PER	Layer	10.85	10.85
SQFIPER	Section	-	-
	Stone	0.31	0.31
PER BUNDLE	Layers	7.00	7.00
PER BUNDLE	Sections	-	-
	SqFt	1.27	1.27
COLDIED LINET DED	Section	-	-
SOLDIER LNFT PER	Layer	13.78	13.78
	Bundle	96.46	96.46
	SqFt	2.54	2.54
CAN OR LAIFT REP	Section	-	-
SAILOR LNFT PER	Layer	27.56	27.56
	Bundle	192.91	192.91
	SqFt	3.23	3.23
UNITS PER	Section	-	-
	Bundle	245.00	245.00
	Layer	381	388
LBS PER	Section	-	-
	Bundle	2,669	2,717

COLORS	Reflectance	Stock	Stock
Granite	SR .26 SRI 27	-	✓
River	SR .32 SRI 34	✓	-
Sierra	SR n/a SRI n/a	✓	-
Custom Colors & Finishes	SR n/a SRI n/a	SO	SO
Please contact your local Sales Representative for color options.			





CONTRACTORS

COMMERCIAL



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES" Exposed Granite Finish



SMOOTH Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

Single Units



RECTANGLE 120 x 240 x 80mm 43/4 x 91/2 x 3 1/8" 245 units/Bundle .31 Sq.Ft./Stone



RECTANGLE 120 x 240 x 80mm 43/4 x 91/2 x 3 1/8" 217 units/Bundle



**SMALL UNIT** 120 x 120 x 80mm 4<sup>3</sup>/<sub>4</sub> x 4<sup>3</sup>/<sub>4</sub> x 3 ½" 56 units/Bundle















### **APPEARANCE**

Edge Detail - Micro Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 7 mm Void - 10.12 %

### **TECHNOLOGIES**

### **CLASSIC**

Budget-friendly traditional product mix

#### **PERMEABLE**

Can be installed to allow water to flow through

### ENDURACOLOR™

Refined surface and long-lasting color

### **EASYCLEAN™** (Umbriano)



Factory sealed to provide integral stain resistance

### COLOR FUSION™ (Umbriano)

Subtly mottled color finish


### **TECHNICAL** INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### **LAYING PATTERNS**



EcoPromenade 3x12 RB\_A



EcoPromenade 3x12\_DHB\_B

	ALL FINISHES
Bundle Type	SINGLE
Plant Produced	MULTI-PLANT
Thickness (mm)	100 MM

	Bundle	63.94
SQFT PER	Layer	10.66
SQFIPER	Section	•
	Stone	0.24

PER BUNDLE	Layers	6.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.02
	Section	-
SOLDIER LINFT PER	Layer	10.83
	Bundle	64.96

SAILOR LNFT PER	SqFt	4.06
	Section	-
	Layer	43.31
	Bundle	259.84

UNITS PER	SqFt	4.13
	Section	-
	Bundle	264.00

		Layer	465
LBS PER	LBS PER	Section	-
		Bundle	2,789

	COLORS	Reflectance	Stock	
	Custom Colors & Finishes	SR n/a SRI n/a	S0	
Please contact your local Sales Representative for color options.				





CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES™ **Exposed Granite Finish** 



HTOOM2 Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



STANDARD 75 x 300 x 100mm 3 x 11 1/8 x 3 1/8" 264 units/Bundle .24 Sq.Ft./Stone

# Promenade EcoTerra™





### **APPLICATIONS**





### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - n/a Void - n/a

### TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color


### **ECOTERRA®**

Reduced carbon emissions and refined surface protection

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS



		4 x 12
	Bundle Type	SINGLE
	Plant Produced	ONTARIO
	Thickness (mm)	70 MM
	Bundle	93.04
OOFT DED	Layer	11.63
SQFT PER	Section	-
	Stone	0.32
DED DUNDLE	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.02
	Section	-
SOLDIER LNFT PER	Layer	11.81
	Bundle	94.49
	SqFt	3.05
CALL OR LAIST REP.	Section	-
SAILOR LNFT PER	Layer	35.43
	Bundle	283.46
	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00
	Layer	393
LBS PER	Section	-
	Bundle	3,140
COLORS	Reflectance	Stock

CULURS	Reflectance	Stock
Light Opal Blend	SR n/a SRI n/a	/
Light Steel Gray	SR n/a SRI n/a	<b>√</b>



CONTRACTORS

Single Unit



4 x 12 100 x 300 x 70 mm 3% x 11% x 23/4 288 units/Bundle .32 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.













### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Granito Textured Joint Spacing - 7 mm Void - n/a

### TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

### ARTISTA™

Boldly mottled color finish


### EASYCLEAN™

Factory Sealed to provide integral stain resistance

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS







Pattern Hex\_A

		ENDURACOLOR	HEX
	Bundle Type	RANDOM	SINGLE
	Plant Produced	PICKERING	PICKERING
	Thickness (mm)	60 MM	70 MM
	Bundle	94.14	73.92
SQFT PER	Layer	10.46	9.24
SUFIPER	Section	-	-
	Stone	-	2.6
DED DUNDLE	Layers	9.00	8.00
PER BUNDLE	Sections	-	-

SOLDIER LNFT PER	SqFt	-	-
	Section	-	-
SOLDIER LINFT PER	Layer	-	-
	Bundle	-	-
	SaFt	0.85	-

SAILOR LNFT PER	SqFt	0.85	-
	Section	-	-
	Layer	8.86	-
	Bundle	79.72	-

	SqFt	-	0.39
UNITS PER	Section	-	-
	Bundle	72.00	192.00

	Layer	287	306.24
LBS PER	Section	-	-
	Bundle	2,583	2,450

COLORS	Reflectance	Stock	Stock
Sabia	SR n/a SRI n/a	/	1
Scuro	SR n/a SRI n/a	/	1



COMMERCIAL









Single Unit



**HEX**200 x 200 x 70mm
7% x 7% x 2<sup>3</sup>/<sub>4</sub>"
192 units/Bundle
.42 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.















### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

### **TECHNOLOGIES** PERMEABLE

Can be installed to allow water to flow through

### ENDURACOLOR™

Refined surface and long-lasting color





Factory sealed to provide integral stain resistance

### COLORFUSION™

Subtly mottled color finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS



HexPaver A

		0 X O	0.0
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MARENGO	MARENGO
	Thickness (mm)	60 MM	70 MM
	Bundle	108.31	73.92
SQFT PER	Layer	10.83	9.24
SQFIPER	Section	-	-
	Stone	0.45	0.39
PER BUNDLE	Layers	10.00	8.00
PER BUNDLE	Sections	-	-
	SqFt	-	-
201 DIED 1 HET DED	Section	-	-
SOLDIER LNFT PER	Layer	-	-
	Bundle	-	-
	SqFt	-	-
0.411 OD 1 NET DED	Section	-	-
SAILOR LNFT PER	Layer	-	-
	Bundle	-	-
	SqFt	2.22	2.60
UNITS PER	Layer	24	24
	Bundle	240.00	192.00
	Layer	276	306
LBS PER	Section	-	-
	Bundle	2,762	2,450

COLORS	Reflectance	Stock	Stock
French Grey	SR .18 SRI 17	✓	S0
Midnight Sky	SR .17 SRI 15	✓	SO
Winter Marvel	SR .35 SRI 38	✓	S0







COMMERCIAL

Single Unit



205 x 205 x 60mm  $8 \times 8 \times 2^{3/8}$ " 240 Units/Bundle .45 SqFt/Stone



200 x 200 x 70mm  $7\% \times 7\% \times 2\%$ 192 Units/Bundle .39 SqFt/Stone







### **APPEARANCE**

Edge Detail - Chamfer Surface Texture - Smooth Joint Spacing - 3 mm

### TECHNOLOGIES

### CLASSIC

Budget-friendly traditional product mix


### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS



Hollandstone 4x8 RB\_B



Hollandstone 4x8 HB\_C



Hollandstone 4x8 BW\_D

	4 x 8
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

	Bundle	118.00
SOUT DED	Layer	11.80
SQFT PER	Section	19.67
	Stone	0.22

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	6.00
	SaFt	1.50

	Oqrit	1.50
SOLDIER LNFT PER	Section	29.53
SOLDIER LINFT PER	Layer	17.72
	Bundle	177.17

	SAILOR LNFT PER	SqFt	3.00
		Section	59.06
		Layer	35.43
		Bundle	354.33

	SqFt	4.58
UNITS PER	Section	90.00
	Bundle	540.00

	Layer	323
LBS PER	Section	538
	Bundle	3,229

COLORS	Reflectance	Stock
Autumn Red	SR n/a SRI n/a	<b>✓</b>
Charcoal	SR .12 SRI 9	✓
River	SR .32 SRI 34	✓
Sierra	SR n/a SRI n/a	/





CONTRACTORS

回路解析表現 COMMERCIAL

Single Unit



**STANDARD**100 x 200 x 60mm
3 % x 7 % x 2 3/8"
540 units/Bundle
.22 Sq.Ft./Stone

### CLASSIC / ENDURACOLOR®

**Bundle Type** 

Plant Produced

Thickness (mm)

Bundle

Layer

Section Stone

Layers

Sections

SqFt Section

Layer

Bundle

SqFt

Section

Layer

Bundle

SqFt

Section

Bundle

Layer

Section Bundle

Reflectance

Please contact your local Sales Representative for color options.

SR n/a SRI n/a

**SQFT PER** 

PER BUNDLE

**SOLDIER LNFT PER** 

SAILOR LNFT PER

**UNITS PER** 

LBS PER

COLORS

Custom Colors & Finishes

4 x 8

**SINGLE** 

82.60

11.80

0.22

7.00

1.50

17.71

124.00

3.00

35.43

248.03

4.58

378.00

429

3,005

Stock

**MULTI-PLANT** 80 MM **HERRINGBONE** 

SINGLE MULTI-PLANT

80 MM

82.60

11.80

0.22

7.00

4.58

378.00

423

2,963

Stock

SO



### APPLICATIONS









#### **APPEARANCE**

Edge Detail - Chamfer Surface Texture - Smooth / Series Exposed Umbriano Mottled / II Campo Brushed Joint Spacing - 3 mm

### **TECHNOLOGIES**

### CLASSIC

Budget-friendly traditional product mix

#### **PERMEABLE**

Can be installed to allow water to flow through

### ENDURACOLOR™

Refined surface and long-lasting color

### **EASYCLEAN™** (Umbriano°)



Factory sealed to provide integral stain resistance

### COLOR FUSION™ (Umbriano°)

Subtly mottled color finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Hollandstone 4x8 RB\_B



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES" Exposed Granite Finish



CONTRACTORS

SMOOTH Premier Finish



COMMERCIAL

UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

Single Unit



### **STANDARD** 100 x 200 x 80mm 3 1/8 x 7 1/8 x 3 1/8"

378 units/Bundle .22 Sq.Ft./Stone





**RECTANGLE** 100 x 200 x 80mm 3 1/8 x 7 1/8 x 3 1/8" 350 Units/Bundle



SMALL UNIT 100 x 200 x 80mm 3 1/8 x 3 1/8 x 3 1/8" 56 Units/Bundle









### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 3 mm

### **TECHNOLOGIES**

### ENDURACOLOR™

Refined surface and long-lasting color

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits


### LAYING PATTERNS



Holland Premier 4x8 RB\_B



Holland Premier 4x8 HB\_C



Holland Premier 4x8 BW\_D

	4 x 8
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	118.00
	Layer	11.80
	Section	-
	Stone	0.22

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-

	SOLDIER LNFT PER Section Layer	SqFt	1.50
		Section	-
		Layer	17.72
		Bundle	177.17

		SqFt	3.00	
	SAILOR LNFT PER	Section	-	
	SAILOR LIFT PER	Layer	35.43	
			Bundle	354.33

	SqFt	4.58
UNITS PER	Section	-
	Bundle	540.00

	Layer	327
LBS PER	Section	-
	Bundle	3,270

COLORS	Reflectance	Stock
Charleston	SR n/a SRI 36	/
Dark Charcoal	SR n/a SRI n/a	<b>✓</b>
Granite	SR n/a SRI n/a	<b>✓</b>
Heritage Brown	SR n/a SRI n/a	<b>✓</b>
Ivory	SR n/a SRI n/a	<b>✓</b>
River	SR .22 SRI 19	<b>✓</b>
Sierra	SR n/a SRI n/a	/







COMMERCIAL

Single Unit



**STANDARD** 100 x 200 x 60mm 3 % x 7 % x 2 3/6" 540 units/Bundle .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.









### **APPEARANCE**

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 3 mm

#### **TECHNOLOGIES**

### ENDURACOLOR™

Refined surface and long-lasting color


### ANTIQUED™

Distressed, timeworn finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS



Mattoni RB\_A Mattoni HB\_C

		SMOOTH
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM
	Bundle	111.60
	Layer	11.16
SQFT PER	Section	-
	Stone	0.16
	Layers	10.00
PER BUNDLE	Sections	-
	SqFt	1.27
	Section	1.27
SOLDIER LNFT PER		14.17
	Layer	
	Bundle	141.73
	SqFt	5.08
0411 00 1 1157 050	Section	-
SAILOR LNFT PER	Layer	56.69
	Bundle	566.92
	SqFt	6.45
LINITO DED	Section	0.43
UNITS PER		-
	Bundle	720.00
	Layer	306
LBS PER	Section	-

COLORS	Reflectance	Stock
Cocoa Brown	SR n/a SRI n/a	✓
Dark Charcoal	SR n/a SRI n/a	<b>√</b>
Granite Fusion	SR n/a SRI 29	<b>✓</b>
Sable	SR n/a SRI n/a	1

Bundle





3,062

CONTRACTORS

COMMERCIAL

Single Unit



**STANDARD**60 x 240 x 60mm
2 3/8 x 9 1/2 x 2 3/8"
720 Units/Bundle
.16 SqFt/Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

# Natural Stone - Limestone Slabs



		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 MM	22 MM	22 MM	22 MM
SQFT PER	Crate	180.00	186.00	160.00	180.00
SUFIFER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
LBS PER	Unit	24	36	48	72
LD9 PER	Crate	2,149	2,221	1,910	2,149

Stock

Reflectance

SR n/a SRI n/a

### **APPLICATIONS**



#### **APPEARANCE**

Edge Detail - Sawn Edge Surface Texture - Riven

### **TECHNICAL INFORMATION**

More information is available online.



Stock

Stock



Stock

CONTRACTORS

COMMERCIAL

### LAYING PATTERNS



Pattern 12x24 RB A Pattern 24x24 RB B Pattern Multi-Unit C





12 x 24 300 x 600 x 22mm 11 % x 23 5% x %" 2.0 Sq.Ft./Stone 90 units/Crate



**18 x 24** 450 x 600 x 22mm 17 ¾ x 23 % x %" 3.0 Sq.Ft./Stone 62 units/Crate



COLORS

Black River

24 x 24 600 x 600 x 22mm 23 % x 23 % x %" 4.0 Sq.Ft./Stone 40 units/Crate



24 x 36 600 x 900 x 22mm 23 % x 35 ½ x %" 6.0 Sq.Ft./Stone 30 units/Crate

Notes: **SOLD IN FULL CRATES ONLY.** Natural Stone is available for purchase by Unilock Authorized Dealers only. Unilock offers adjustable and stackable pedestal system; please contact your Territory Manager for pricing and availability. Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. Please see important notice on page 94 regarding installation practices. **Important:** Natural Stone is covered under Unilock's Transferable Lifetime Guarantee. All measurement are nominal. **Product is not intended for vehicular applications.** 

# Natural Stone - Limestone Steps, Coping and Pillar Cap



		48 x 12 ROCK FACED COPING	48 x 14 ROCK FACED COPING	24 x 24 ROCK FACED PILLAR CAP	28 x 28 ROCK FACED PILLAR CAP
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 MM	50 MM	64 MM	64 MM
UNITS PER	Crate	20.00	20.00	14.00	12.00
UNITSPER	SqFt	-	-	-	-
LBS PER	Unit	106	128	186	200
LD3 PER	Crate	2,122	2,552	2,606	2,402

COLORS	Reflectance	Stock	Stock	Stock	Stock
Black River	SR n/a SRI n/a	1	<b>✓</b>	1	1

### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Rock Faced Surface Texture - Riven

### **TECHNICAL INFORMATION**

More information is available online.

		48 x 16 STEP
	Bundle Type	SINGLE
	Thickness (mm)	150 MM
FCFT PER	Crate	32.00

		20.00
FCFT PER	Crate	32.00
LNFT PER	Crate	24.00
UNITS PER	Crate	6.00

LBS PER	Unit	421
LD3 PER	Crate	2,526

COLORS	Stock
Black River	<b>✓</b>







COMMERCIAL



**48 x 16 STEP** 1,200 x 150 x 400mm 47 1/4 x 5 7/8 x 15 3/4" 6 units/Crate

Pillar Cap



**24" PILLAR CAP** 600 x 600 x 64mm 23 % x 23 % x 2 5% " 14 units/Crate 28" PILLAR CAP 710 x 710 x 64mm 28 x 28 x 25%" 12 units/Crate

Coping



**48 x 12 ROCK FACE** 1,200 x 300 x 50mm 47 ½ x 11 ½ x 2" 20 units/Crate

**48 x 14 ROCK FACE** 1,200 x 344 x 50mm 47 1/4 x 13 5/8 x 2" 20 units/Crate

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealers for natural stone. All measurements are nominal. Product is not intended for vehicular applications.

### Natural Stone - Sandstone Slabs



		12 x 24	18 x 24	24 x 24	24 x 36
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	22 MM	22 MM	22 MM	22 MM
SQFT PER	Crate	180.00	186.00	160.00	180.00
SQFIPER	Units	2.00	3.00	4.00	6.00
UNITS PER	Crate	90.00	62.00	40.00	30.00
UNITS PER	SqFt	0.50	0.33	0.25	0.17
	Unit	24	36	48	72

### **APPLICATIONS**



#### **APPEARANCE**

Edge Detail

Sawn Edge (Golden Sand, Greyfield and Ivory Sand) Rock Faced (Autumn Harvest and Stone Cliff Grey)

Surface Texture
Brushed (Golden Sand, Greyfield and Ivory Sand)
Riven (Autumn Harvest and Stone Cliff Grey)

### **TECHNICAL INFORMATION**

More information is available online.

COLORS	Reflectance	Stock	Stock	Stock	Stock
Autumn Harvest	SR n/a SRI n/a	1	✓	/	/
Golden Sand	SR n/a SRI n/a	1	✓	/	/
Ivory Sand	SR n/a SRI n/a	/	✓	1	/
Stone Cliff Grey	SR n/a SRI n/a	/	✓	1	1
Greyfield	SR n/a SRI n/a	1	✓	✓	✓

2,149



2,221



2,149

1,910


CONTRACTORS

COMMERCIAL


### LAYING PATTERNS



NaturalStone 12x24 RB A



NaturalStone 24x24 RB B



**LBS PER** 

Crate

NaturalStone Multi-Unit C



12 x 24 300 x 600 x 22mm 11% x 23 5% x 7%" 90 units/Crate 2.0 Sq.Ft./Stone



**18 x 24** 450 x 600 x 22mm 17 <sup>3</sup>/<sub>4</sub> x 23 <sup>5</sup>/<sub>8</sub> x <sup>7</sup>/<sub>8</sub>" 62 units/Crate 3.0 Sq.Ft./Stone



24 x 24 600 x 600 x 22mm 23 % x 23 % x %" 40 units/Crate 4.0 Sq.Ft./Stone



24 x 36 600 x 900 x 22mm 23 % x 35 ½ x %" 30 units/Crate 6.0 Sq.Ft./Stone

Notes: **SOLD IN FULL CRATES ONLY. This product** is **not intended for vehicular applications**. Unilock offers adjustable pedestals. \*\* Product is only available to dealers. \*\* Please see important notice on page 94 regarding installation practices. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.

# Natural Stone - Sandstone Steps, Coping and Pillar Cap



### **APPLICATIONS**









### APPEARANCE

Edge Detail - Rock Faced

Surface Texture
Brushed (Golden Sand, Greyfield
and Ivory Sand)
Riven (Stone Cliff Grey)

### **TECHNICAL INFORMATION**

More information is available online.

		48 x 16 STEP
	Bundle Type	SINGLE
	Thickness (mm)	150 MM
FCFT PER	Crate	32.00
LNFT PER	Crate	24.00
UNITS PER	Crate	6.00
LBS PER	Unit	421
	Crate	2,526

COLORS	Stock
Ivory Sand	SO

		48 x 12 4' FULLNOSE COPING	48 x 12 4' ROCK FACED COPING	48 x 14 4' ROCK FACED COPING	24 x 24 PILLAR CAP	28 x 28 PILLAR CAP
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	50 MM	50 MM	50 MM	65 MM	65 MM
UNITS PER	Crate	20.00	20.00	20.00	14.00	12.00
UNITSPER	SqFt	-	-	-	-	-
LBS PER	Unit	106	106	128	186	200
LDS PER	Crate	2,116	2,122	2,552	2,606	2,402

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Golden Sand	SR n/a SRI n/a	1	1	-	S0	S0
Greyfield	SR n/a SRI n/a	1	1	-	-	-
Ivory Sand	SR n/a SRI n/a	<b>✓</b>	1	-	✓ <b>/</b>	S0
Stone Cliff Grey	SR n/a SRI n/a	1	1	1	1	/



24 x 24 PILLAR CAP 600 x 600 x 65mm 23 % x 23 % x 2 5%" 14 units/Crate



28 x 28 PILLAR CAP 725 x 725 x 65mm 28 5% x 28 5% x 2 5%" 12 units/Crate



CONTRACTORS



COMMERCIAL



**48 x 16 STEP**1,200 x 150 x 400mm
47 1/4 x 5 7% x 15 3/4"
6 units/Crate
Ivory Sand Only

SPECIAL ORDER



4' FULLNOSE 48 x 12 1,200 x 50 x 300mm 47 1/4 x 2 x 11 1/8" 20 units/Crate



4' ROCK FACE 48 x 12 1,200 x 50 x 300mm 47 1/4 x 2 x 11 7/8" 20 units/Crate



4' ROCK FACE 48 x 14 1,200 x 50 x 350mm 47 1/4 x 2 x 13 %" 20 units/Crate Stone Cliff Grey Only

Pillar Caps

# Nordic Cobble<sup>™</sup> **⊘**





### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - Zero Surface Texture - Textured

# TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

### ENDURACOLOR™


Refined surface and long-lasting color


### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

### LAYING PATTERNS

#	Ħ	Ħ





NordicCobble\_A

NordicCobble\_Fan

 $NordicCobble\_Circle$ 

	PREMIER
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

OOET DED	Bundle	98.25
	Layer	9.83
SQFT PER	Section	-
	Stone	0.09

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	3.39
	Section	-
	Layer	33.31
	Bundle	333.07

SAILOR LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

	SqFt	10.99
UNITS PER	Section	-
	Bundle	1,080

	Layer	230.00
LBS PER	Section	-
	Bundle	2,300

COLORS	Reflectance	Stock
Dark Charcoal	SR n/a SRI n/a	<b>✓</b>
Granite Fusion	SR n/a SRI n/a	<b>✓</b>
Opal	SR n/a SRI n/a	<b>✓</b>



COMMERCIAL

Single Unit



**STANDARD** 89.9 x 94 x 60mm 3 % x 3 ¾ x 2 ¾ " 1,080 units/Bundle .09 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.













### **APPEARANCE**

Edge Detail - Chamfer Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 3 mm

### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)

Factory sealed to provide integral stain resistance


### **COLOR FUSION™** (Umbriano)

Subtly mottled color finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### **LAYING PATTERNS**







CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES™ Exposed Granite Finish



HTOOMS Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean

35

Single Unit



STANDARD 260 x 260 x 80mm 10 1/4 x 10 1/4 x 3 1/8" 144 units/Bundle .54 Sq.Ft./Stone

surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

**ALL FINISHES Bundle Type** SINGLE Plant Produced MULTI-PLANT Thickness (mm) 80 MM

	Bundle	77.33
COLL DED	Layer	9.67
SQFT PER	Section	-
	Stone	0.54

PER BUNDLE	Layers	8.00
PER DUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	1.59
	Section	-
	Layer	15.35
	Bundle	122.83

CALLOD LAIFT DED	SqFt	1.59	
	SAILOR LNFT PER	Section	-
	SAILOR LIFT PER	Layer	15.35
		Bundle	122.83

	SqFt	1.86
UNITS PER	Section	-
	Bundle	144.00

LBS PER	Layer	350
	Section	-
	Bundle	2,801

COLORS	Reflectance	Stock		
Custom Colors & Finishes	SR n/a SRI n/a	SO		
Please contact your local Sales Representative for color options.				

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured









### **APPEARANCE**

Surface Texture - Stone Finish

### **TECHNICAL INFORMATION**


More information is available online.

### LAYING PATTERNS









Porcelain 24x24  $SB_B$ 

		DEL CONCA SQUARE PRESSED EDGE	DEL CONCA COPING	
Bundle Type		SINGLE	SINGLE	
	Thickness (mm)	20 MM	30 MM	
		T		
SQFT PER	Crate	248.00	-	
	Box	7.75	-	
	Unit	3.88	-	
PER CRATE	Box	32.00	38.00	
	SqFt	248.00	-	
	Unit	64.00	38.00	
UNITS PER	Crate	64.00	38.00	
	Box	2.00	1.00	
	Unit	36	30	
LBS PER	SqFt	9	-	
	Box	72	30	
	Crate	2,288	1,127	

COLORS	Reflectance	Stock	Stock
Chamonix Bianco	SR n/a SRI n/a	/	-
Chamonix Grey	SR n/a SRI n/a	/	-
Gotham Grey	SR n/a SRI n/a	<b>✓</b>	<b>✓</b>
Gotham Nero	SR n/a SRI n/a	<b>✓</b>	-
New England White	SR n/a SRI n/a	/	-
New England Ivory	SR n/a SRI n/a	/	-
New England Cold Gray	SR n/a SRI n/a	/	-
Travstone Beige	SR n/a SRI n/a	/	/







COMMERCIAL





**DEL CONCA SQUARE** 600 x 600 x 20mm  $23 \, \% \, x \, 23 \, \% \, x \, \%$ " 3.88 Sq.Ft./Stone 64 Units/Crate



**DEL CONCA COPING** 330 x 600 x 30mm 13 x 23 5/8 x 1 1/4"

38 Units/Crate










#### **APPEARANCE**

Surface Texture - Woodgrain Finish (DelConca) & Stone Finish


#### **TECHNICAL INFORMATION**

More information is available online.

#### LAYING PATTERNS







Porcelain 16x32 HB\_D

		DEL CONCA RECTANGLE PRESSED EDGE	UNILOCK RECTANGLE PRESSED EDGE	
	Bundle Type	SINGLE	SINGLE	
	Thickness (mm)	20 MM	20 MM	
	D. II. I	405.00	400.00	
	Pallet	165.36	186.00	
SQFT PER	Box	6.89	6.89	
	Unit	3.45	3.44	
	Box	24.00	27.00	
PER PALLET	SqFt	165.36	186.00	
	Unit	48.00	54.00	
UNITS PER	Pallet	48.00	54.00	
ONITOFER	Box	2.00	2.00	
	Unit	32	32	
LBS PER	SqFt	9	9	
LDS FER	Box	64	64	
	Pallet	1,538	1,726	

COLORS	Reflectance	Stock	Stock
Cosmic Grey	SR n/a SRI n/a	-	✓
Dove Grey Travertine	SR n/a SRI n/a	-	✓
New England White	SR n/a SRI n/a	/	-
New England Ivory	SR n/a SRI n/a	1	-
New England Cold Gray	SR n/a SRI n/a	/	-
Quartzite Dark Gray	SR n/a SRI n/a	1	-
Quartzite Sand	SR n/a SRI n/a	✓	-







COMMERCIAL

Single Unit



**DEL CONCA RECTANGLE** 400 x 800 x 20mm 15 ¾ x 31 ½ x %" 3.45 Sq.Ft./Stone

48 Units/Crate



UNILOCK RECTANGLE

400 x 800 x 20mm 15 34 x 31 ½ x %" 3.44 Sq.Ft./Stone 54 Units/Crate

Notes: **SOLD IN FULL CRATES ONLY.** Porcelain tile is available for purchase by Unilock Authorized Dealers only. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.

## Porcelain Modular Bundle





#### **APPLICATIONS**




#### **APPEARANCE**

Surface Texture - Stone Finish

#### **TECHNICAL INFORMATION**

More information is available online.

#### LAYING PATTERNS





Porcelain Fixed Random\_G

Porcelain Fixed Random\_H

	DEL CONCA MODULAR BUNDLE
Bundle Type	RANDOM
Thickness (mm)	20 MM

	Pallet	434.00
SQFT PER	Box	-
	Unit	-

	Box	-
PER PALLET	SqFt	-
	Unit	-

LINITS PER	Pallet	192
UNITSPER	Вох	-

	Unit	-
LBS PER	SqFt	-
LD3 PER	Box	-
	Pallet	3,973

COLORS	Reflectance	Stock	
Travstone Beige	SR n/a SRI n/a	<b>✓</b>	





CONTRACTORS

COMMERCIAL



**12 x 12** 300 x 300 x 20mm 11 % x 11 % x %" 64 units/62 Sq.Ft.



12 x 24 300 x 600 x 20mm 11 % x 23 % x % " 64 units/124 Sq.Ft.



24 x 24 600 x 600 x 20mm 23 % x 23 % x %" 64 units/248 Sq.Ft.

Notes: **SOLD IN FULL CRATES ONLY.** All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. **Product is not intended for vehicular applications.** 

Modular Bundle









#### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Custom (see below) Umbriano Mottled / Il Campo Brushed Joint Spacing - 4 mm

#### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)



Factory sealed to provide integral stain resistance

#### COLOR FUSION™ (Umbriano)

Subtly mottled color finish

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### **LAYING PATTERN**



Promenade Multi-Unit Random G

Bundle Type		
Dullule Type	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT
Thickness (mm)	70 MM	150 MM
Dundlo	03.00	46.50
		11.63
•	11.02	11.03
	- 0.07	- 0.07
Stone	0.97	0.97
Layers	8.00	4.00
Sections	-	-
SqFt	0.51	0.51
Section	-	-
Layer	-	5.91
Bundle	47.24	23.62
SqFt	2.03	2.03
Section	-	-
Layer	23.63	23.62
Bundle	-	94.49
SqFt	1.03	1.03
Section	-	-
Bundle	96.00	48.00
Layer	372	798
Section	-	-
Bundle	2,978	3,192
	Thickness (mm)  Bundle Layer Section Stone  Layers Sections  SqFt Section Layer Bundle  SqFt Section Layer Bundle  SqFt Section Layer Bundle  Layer Bundle  SqFt Section	Thickness (mm)         70 MM           Bundle         93.00           Layer         11.62           Section         -           Stone         0.97           Layers         8.00           Sections         -           SqFt         0.51           Section         -           Layer         -           Bundle         47.24           SqFt         2.03           Section         -           Layer         23.63           Bundle         -           SqFt         1.03           Section         -           Bundle         96.00           Layer         372           Section         -

ı	COLORS	Reflectance	Stock	Stock
	Custom Colors & Finishes	SR n/a SRI n/a	SO	SO
Please contact your local Sales Representative for color options.				



COMMERCIAL



CLASSIC Thrumix Finish



Brushed Finish



**Exposed Granite Finish** 



Premier Finish



Mottled Finish with/ ColorFusion and EasyClean

Single Units



6 x 24 150 x 600 x 70mm 5 % x 23 5/8 x 2 3/4" 72 units/Bundle 1.29 Sq.Ft./Stone



6 x 24 150 x 600 x 150mm 5 1/8 x 23 5/8 x 5 7/8" 48 units/Bundle .97 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

## CLASSIC / ENDURACOLOR



#### **APPLICATIONS**









#### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Multi-Finish Available Joint Spacing - 4 mm

#### **TECHNOLOGIES CLASSIC**

Budget-friendly traditional product mix


#### ENDURACOLOR™

Refined surface and long-lasting color

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



		3 x 12	4 x 12	4 x 16	8 x 24
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	100 MM	100 MM	100 MM	100 MM
	Bundle	63.94	58.13	51.67	51.67
2057 050	Layer	10.66	11.63	10.33	10.33
SQFT PER	Section	-	-	-	-
	Stone	0.24	0.32	0.43	1.29
DED DUNDI E	Layers	6.00	5.00	5.00	5.00
PER BUNDLE	Sections	-	-	-	-
	SqFt	1.35	1.02	0.76	0.51
SOLDIER	Section	-	-	-	-
LNFT PER	Layer	14.44	11.81	7.87	5.25
	Bundle	86.61	59.06	39.37	26.25
	SqFt	4.06	3.05	3.05	1.52
SAILOR	Section	-	-	-	-
LNFT PER	Layer	43.31	35.43	31.50	15.75
	Bundle	259.84	177.17	157.48	78.74
	SqFt	4.13	3.10	2.32	0.77
UNITS PER	Section	-	-	-	-
	Bundle	264.00	180.00	120.00	40.00
	Layer	465	532	469	483
LBS PER	Section	-	-	-	-
	Bundle	2,789	2,659	2,345	2,414
COLORS	Reflectance	Stock	Stock	Stock	Stock
Custom Colors & Finishes	SR n/a SRI n/a	SO	SO	S0	S0
Please contact your local Sales Representative for color options.					

	CULURS	Reflectance	Stock	Stock	Stock	Stock
	Custom Colors & Finishes	SR n/a SRI n/a	SO	SO	S0	SO
Please contact your local Sales Representative for color options.						



COMMERCIAL



CLASSIC Thrumix Finish



IL CAMPO® Brushed Finish



SERIES™ Exposed Granite Finish



HTOOMS Premier Finish



UMBRIANO® Mottled Finish with/ ColorFusion and EasyClean



3 x 12 75 x 300 x 100mm 3 x 11 1/8 x 3 1/8" 264 units/Bundle .24 Sq.Ft./Stone



4 x 12 100 x 300 x 100mm 3 % x 11 % x 3 %" 180 units/Bundle .32 Sq.Ft./Stone



4 x 16 100 x 400 x 100mm  $3\% \times 15\% \times 3\%$ 120 units/Bundle .43 Sq.Ft./Stone



8 x 24 200 x 600 x 100mm  $7\% \times 23\% \times 3\%$ " 40 units/Bundle

1.29 Sq.Ft./Stone

Notes: Special Order - Lead time required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Please note that weights are only estimated as custom finishes will alter bundle weight. Contact Unilock for more information.

Single Units













#### **APPEARANCE**

Surface Texture - Textured Joint Spacing - 10 mm

#### **TECHNOLOGIES** ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

#### EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance

#### REALA™

Cast from natural stone

#### ULTIMA™

Up to 4x stronger than poured-in-place concrete

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Richcliff Fixed Random A



Richcliff Fixed Random B



Richcliff LargeRec HB\_H

		LARGE RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	AYR	AYR
Thickness (mm)	60 MM	60 MM
Bundle	90.30	82.39

	Bundle	90.30	82.39
SQFT PER	Layer	11.29	10.30
SUFIPER	Section	-	-
	Stone	-	1.72

DED BLINDLE	Layers 8.00	8.00	
PER BUNDLE	Sections	-	-

	SqFt	-	0.58
SOLDIER LNFT PER	Section	-	-
SOLDIER LIFT PER	Layer	-	5.94
	Bundle	-	47.56

	SqFt	1.31	1.01
SAILOR LNFT PER	Section	-	-
SAILOR LINFT PER	Layer	14.78	10.39
E	Bundle	118.22	83.15

	SqFt	-	0.58
UNITS PER	Section	-	-
	Bundle	160.00	48.00

	Layer	309	301
LBS PER	Section	-	-
	Bundle	2,472	2,411

COLORS	Reflectance	Stock	Stock
Dawn Mist	SR n/a SRI n/a	<b>✓</b>	/
Pebble Taupe	SR n/a SRI n/a	<b>✓</b>	<b>✓</b>
Smoke Shale	SR n/a SRI n/a	/	/



CONTRACTORS



COMMERCIAL



**RECTANGLE** 226 x 300 x 60mm 8 % x 11 % x 2 %" 64 Units/Bundle

.75 SqFt/Stone



**SQUARE** 226 x 226 x 60mm  $8\% \times 8\% \times 2\%$ " 32 units/Bundle .58 Sq.Ft./Stone



**SMALL RECTANGLE** 150 x 226 x 60mm  $5\% \times 8\% \times 2\%$ " 64 units/Bundle .38 Sq.Ft./Stone



Single Unit

LARGE RECTANGLE 302 x 528 x 60mm  $11\% \times 20\% \times 23\%$ 48 units/Bundle 1.72 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.









#### **APPEARANCE**

Edge Detail - Chamfer Surface Texture - Series Exposed Joint Spacing - 3 mm


#### TECHNOLOGIES ENDURACOLOR™

Refined surface and long-lasting color

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



		4 x 8
	Bundle Type	SINGLE
	Plant Produced	CHICAGO
	Thickness (mm)	60 MM
	Bundle	117.90
	Layer	11.79
SQFT PER	Section	19.67
	Stone	0.22
	Layers	10.00
PER BUNDLE	Sections	6.00
	SqFt	1.50
SOLDIER LNFT PER	Section	29.53
OOLDIER EM TTER	Layer	17.72
	Bundle	177.17
	SqFt	3.01
	Section	59.06
SAILOR LNFT PER	Layer	35.43
	Bundle	354.33
	SqFt	4.58
UNITS PER	Section	90.00
	Bundle	540.00
	Lavor	306
LBS PER	Layer	511
LD3 PER	Bundle	3,065
	Dundle	3,000
COLORS	Reflectance	Stock

SR n/a SRI n/a

SR n/a SRI n/a





CONTRACTORS

COMMERCIAL

Single Unit



4 x 8 100 x 200 x 60mm 3 % x 7 % x 2 3/8" 540 units/Bundle .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

Golden Tan Onyx Black













#### **APPEARANCE**

Edge Detail - Chamfer Surface Texture - Series Exposed Joint Spacing - 3 mm

# TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

#### ENDURACOLOR™

Refined surface and long-lasting color

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS







Series 4x12\_RB\_L

Series4x12\_HB\_M

Series 4x12\_DHB\_N

	4 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	80 MM

COLL DED	Bundle	93.04
	Layer	11.63
SQFT PER	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00	
	PER BUNDLE	Sections	-
		Sections	

SOLDIER LNFT PER	SqFt	1.02
	Section	-
	Layer	11.81
	Bundle	94.49

SAILOR LNFT PER	SqFt	3.05
	Section	-
	Layer	35.43
	Bundle	283.46

UNITS PER	SqFt	3.10
	Section	-
	Bundle	288.00

LBS PER	Layer	426
	Section	-
	Bundle	3,404

COLORS	Reflectance	Stock
Arctic Grey	SR n/a SRI n/a	✓
Nordic Star	SR n/a SRI n/a	<b>✓</b>





CONTRACTORS

COMMERCIAL

Single Unit



**4 x 12** 100 x300 x 80mm 3 % x 11 % x 3 %" 288 units/Bundle .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces**. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.









#### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 2 mm

#### TECHNOLOGIES ENDURACOLOR™


Refined surface and long-lasting color

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

#### LAYING PATTERNS





Skyline 24x24\_SB\_A Skyline 24x24\_RB\_B

	24 x 24
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	50 MM

SQFT PER	Bundle	80.00
	Layer	8.00
	Section	-
	Stone	4.00

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

SAILOR LNFT PER	SqFt	0.50
	Section	-
	Layer	4.00
	Bundle	40.00

UNITS PER	SqFt	0.25
	Section	-
	Bundle	20.00

LBS PER	Layer	183
	Section	-
	Bundle	1,833

COLORS	Reflectance	Stock
Chamois	SR. 41 SRI 46	✓
Silver Grey	SR n/a SRI n/a	<b>✓</b>





CONTRACTORS

COMMERCIAL





**24 x 24** 606 x 606 x 50mm 23 % x 23 % x 2" 20 units/Bundle 4.00 Sq.Ft./Stone



PEDESTAL SYSTEM
Contact your local Unilock Rep

for more information.









#### **APPEARANCE**

Edge Detail - Micro Surface Texture - Smooth Joint Spacing - 0 mm

#### **TECHNOLOGIES**

#### $\textbf{ENDURACOLOR}^{\text{\tiny{TM}}}$

Refined surface and long-lasting color

#### EASYCLEAN™ (→)



Factory sealed to provide integral stain resistance


#### COMFORT STEP™

Ultra smooth surface texture

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1782 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Soreno 16x32 RB\_A

	16 x 32	SHOT BLAST
Bundle Type	SINGLE	SINGLE
Plant Produced	CHICAGO	CHICAGO
Thickness (mm)	50 MM	50 MM

	Bundle	64.27	64.27
SOET DED	Layer	3.57	3.57
SQFT PER	Section	-	-
	Stone	3.57	3.57

PER BUNDLE	Layers	18.00	18.00
FER BONDEL	Sections	-	-

	SqFt	0.37	0.38
SOLDIER LNFT PER	Section	-	-
SOLDIER LINFT PER	Layer	1.34	1.34
	Bundle	24.04	24.12

SAILOR LNFT PER	SqFt	0.75	0.75		
	Section	-	-		
	SAILOR LINFT PER	Layer	2.67	2.67	
		Bundle	48.13	48.06	

	SqFt	0.28	0.28
UNITS PER	Section	-	-
	Bundle	18.00	18.00

	Layer	86	86	
LBS PER	Section	-	-	
	Bundle	1,549	1,549	

COLORS	Reflectance	Stock	Stock
Light Granite	SR n/a SRI 50	<b>✓</b>	-
Toscana Beige	SR n/a SRI 77	/	-
Dark Charcoal	SR n/a SRI n/a	-	<b>✓</b>



CONTRACTORS

Single Units



16 x 32 407 x 815 x 50mm 16 x 32 x 2" 18 units/Bundle 3.57 Sq.Ft./Stone



PEDESTAL SYSTEM Contact your local Unilock Rep for more information.

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.













#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Textured Joint Spacing - 10 mm Void - 6.5%

#### **TECHNOLOGIES**

#### **PERMEABLE**

Can be installed to allow water to flow through

#### ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

## EASYCLEAN™ 🕕



Factory sealed to provide integral stain resistance

#### **REALA**™

Cast from historical brick


#### **ULTIMA**™

Up to 4x stronger than poured-in-place concrete

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### **LAYING PATTERNS**



Town Hall 4x10 DHB\_B Town Hall 4x10 HB\_B

		STANDARD
	Bundle Type	SINGLE
	Plant Produced	AYR
	Thickness (mm)	70 MM
	Bundle	88.41
SQFT PER	Layer	11.05
OQLITER	Section	-
	Stone	0.28
PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-
	SqFt	1.19
COLDIED LNET DED	Section	-
SOLDIER LNFT PER	Layer	13.12
	Bundle	104.99
	SqFt	2.97
SAILOR LNFT PER	Section	-
SAILOR LINFT PER	Layer	32.81
	Bundle	262.47
	SqFt	3.62
UNITS PER	Section	-
	Bundle	320.00
	Layer	361
LBS PER	Section	-
	Bundle	2,888

COLORS	Reflectance	Stock
Basalt	SR n/a SRI n/a	<b>✓</b>
Burgundy Red	SR n/a SRI n/a	<b>✓</b>
Burnt Clay	SR n/a SRI n/a	1
Old Oak	SR n/a SRI n/a	1





CONTRACTORS

COMMERCIAL





STANDARD 250 x 100 x 70mm 9 1/8 x 3 1/8 x 2 3/4" 320 units/Bundle .28 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.















#### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Smooth Joint Spacing - 7mm Void - 5.5%

#### **TECHNOLOGIES PERMEABLE**

Can be installed to allow water to flow through


#### ENDURACOLOR™

Refined surface and long-lasting color

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Treo Fixed Random\_R Treo Fixed Random\_S

	SMOOTH
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	60 MM

SQFT PER	Bundle	108.99
	Layer	10.90
	Section	-
	Stone	-

PER BUNDLE	Layers	10.00
	Sections	-

	SOLDIER LNFT PER	SqFt	-
		Section	-
		Layer	-
		Bundle	-

	SAILOR LNFT PER	SqFt	1.35
		Section	-
		Layer	14.76
			Bundle

	SqFt	-
UNITS PER	Section	-
	Bundle	210.00

	Layer	295
LBS PER	Section	-
	Bundle	2,949

COLORS	Reflectance	Stock
Granite	SR n/a SRI n/a	✓
River	SR n/a SRI n/a	✓
Sierra	SR n/a SRI n/a	<b>✓</b>
Tuscany	SR n/a SRI n/a	/





CONTRACTORS

COMMERCIAL

Random Bundle



LARGE RECTANGLE 225 x 337.5 x 60mm 8 % x 13 % x 2 %" 60 units/Bundle .82 Sq.Ft./Stone



**SQUARE** 225 x 225 x 60mm 8 1/8 x 8 1/8 x 2 3/8" 70 units/Bundle .55 Sq.Ft./Stone



SMALL RECTANGLE 112.5 x 225 x 60mm 4 ½ x 8 % x 2 3/8" 80 units/Bundle .27 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.















#### **APPEARANCE**

Edge Detail - Micro Surface Texture - Series Exposed Textured Joint Spacing - 10mm Void - 5.6%

#### **TECHNOLOGIES PERMEABLE**

Can be installed to allow water to flow through

#### ENDURACOLOR™

Refined surface and long-lasting color

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Tribeca Cobble Fixed Random\_A

	SERIES EXPOSED TEXTURED
Bundle Type	RANDOM
Plant Produced	CHICAGO
Thickness (mm)	70 MM

SQFT PER	Bundle	97.53
	Layer	12.19
	Section	-
	Stone	-

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

SOLDIER LNFT PER	SqFt	-
	Section	-
	Layer	-
	Bundle	-

SAILOR LNFT PER	SqFt	2.34
	Section	-
	Layer	28.49
	Bundle	227.95

	SqFt	-
UNITS PER	Section	-
	Bundle	304.00

	Layer	378
LBS PER	Section	-
	Bundle	3,022

COLORS	Reflectance	Stock
Cobalt Grey	SR n/a SRI n/a	✓
Peppered Granite	SR .38 SRI 42	✓





CONTRACTORS

COMMERCIAL

Random Bundle



LARGE RECTANGLE 130 x 305 x 70mm 5 x 12 x 2 ¾" 88 units/Bundle .43 Sq.Ft./Stone



RECTANGLE 130 x 230 x 70mm 5 x 9 x 2 ¾" 88 units/Bundle .32 Sq.Ft./Stone



SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 1/8 x 2 3/4" 128 units/Bundle .25 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. For permeable installations, Unilock recommends using granite chips for joint filler. For traditional applications, please refer to the Polymeric Sand Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.















#### **APPEARANCE**

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm Void - 40%

# TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through


#### CLASSIC

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Turfstone A

	SMOOTH
Bundle Type	SINGLE
Plant Produced	CHICAGO/ ELKHORN
Thickness (mm)	80 MM

	Bundle	80.00
SQFT PER	Layer	10.00
SUFIFER	Section	-
	Stone	2.50

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

	SqFt	-
SOLDIER LNFT PER	Section	-
SOLDIER LINFT PER	Layer	-
	Bundle	-

	SqFt	-
SAILOR LNFT PER	Section	-
SAILOR LINFT FER	Layer	-
	Bundle	-

	SqFt	0.40
UNITS PER	Section	-
	Bundle	32.00

	Layer	249
LBS PER	Section	-
	Bundle	1,995

COLORS	Reflectance	Stock
Natural	SR .30 SRI 32	SO

Single Unit



**LARGE RECTANGLE** 400 x 600 x 80mm 15 ¾ x 23 ½ x 3 ½" 32 units/Bundle 2.50 Sq.Ft./Stone





			XL	4 x 8	8 x 16
	Bundle Type	RANDOM	SINGLE	SINGLE	SINGLE
	Plant Produced	MARENGO	MARENGO	MARENGO	GEORGETOWN
	Thickness (mm)	60 MM	60 MM	60 MM	70 MM
	Bundle	116.57	116.57	118.00	82.67
SQFT PER	Layer	11.66	11.66	11.80	10.33
JUFIPER	Section	-	-	-	-
	Stone	-	5.83	0.22	0.86





\*8x16 unit only

#### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

#### **TECHNOLOGIES** ENDURACOLOR™

Refined surface and long-lasting color



Factory sealed to provide integral stain resistance


#### COLORFUSION™

Subtly mottled colored finish

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Umbriano Fixed Random\_A

	Bundle	116.57	116.57	118.00	82.67
COET DED	Layer	11.66	11.66	11.80	10.33
SQFT PER	Section	-	-	-	-
	Stone	-	5.83	0.22	0.86
PER BUNDLE	Layers	10.00	10.00	10.00	8.00
	Sections	-	-	-	-
	0.5		0.00	4.50	0.70
	SqFt	-	0.32	1.50	0.76
SOLDIER	Section	-	-	-	-
LNFT PER	Layer	-	3.74	17.72	7.87
	Bundle	-	37.40	159.45	62.99
	SqFt	0.80	0.53	3.00	1.52
SAILOR	Section	-	-	-	-
LNFT PER	Layer	9.35	6.23	35.43	15.75
	Bundle	93.50	62.30	318.90	125.98
	SqFt	-	0.17	4.58	1.16
UNITS PER	Section	-	-	-	-
	Bundle	80.00	20.00	540.00	96.00
	Layer	320	320	320	331
LBS PER	Section	-	-	-	-
	Bundle	3,199	3,199	3,201	2,647

COLORS	Reflectance	Stock	Stock	Stock	Stock
French Grey	SR .18 SRI 17	✓	✓	-	SO
Grenada White	SR n/a SRI n/a	✓	<b>✓</b>	-	-
Midnight Sky	SR .17 SRI 15	✓	-	1	SO
Summer Wheat	SR .42 SRI 48	✓	✓	-	SO
Winter Marvel	SR .35 SRI 38	✓	-	-	SO





8 x 16 200 x 400 x 70mm 7 1/8 x 15 3/4 x 2 3/4" 96 units/Bundle .86 Sq.Ft./Stone

Single Units



CONTRACTORS



COMMERCIAL

Random Bundle

LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 ½ x 2 3/8" 20 units/Bundle

2.331 Sq.Ft./Stone

SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.554 Sq.Ft./Stone **SMALL RECTANGLE** 190 x 380 x 60mm  $7\frac{1}{2} \times 15 \times 2\frac{3}{8}$ " 30 units/Bundle .77 Sq.Ft./Stone

570 x 950 x 60mm 22 ½x 37 ½ x 2 3/8" 20 units/Bundle 5.83 Sq.Ft./Stone



4 x 8 100 x 200 x 60mm 4 x 8 x 2 3/8" 540 units/Bundle .22 Sq.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Only the 8x16 is approved for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

## Umbriano® 80mm







#### **APPLICATIONS**











#### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3 mm

# TECHNOLOGIES PERMEABLE

Can be installed to allow water to flow through

#### ENDURACOLOR™

Refined surface and long-lasting color

## EASYCLEAN™ (i)

Factory sealed to provide integral stain resistance


#### **COLORFUSION™**

Subtly mottled colored finish

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Umbriano 4x12 HB\_1 Umbriano 4x12 RB\_H

	4 x 12
Bundle Type	SINGLE
Plant Produced	MARENGO
Thickness (mm)	80 MM
Bundle	93.04

	Duriule	93.04
SQFT PER	Layer	11.63
SUFIFER	Section	-
	Stone	0.32

PER BUNDLE	Layers	8.00
PER BUNDLE	Sections	-

	SOLDIER LNFT PER	SqFt	1.02
		Section	-
		Layer	11.81
		Bundle	94.49

	SAILOR LNFT PER	SqFt	3.05		
		Section	-		
		Layer	35.43		
					Bundle

	SqFt	3.10
UNITS PER	Section	-
	Bundle	288.00

	Layer	426	
LBS PER	Section	-	
	Bundle	3,404	

COLORS	Reflectance	Stock
French Grey	SR .18 SRI 17	<b>✓</b>
Midnight Sky	SR .17 SRI 15	<b>✓</b>
Winter Marvel	SR .35 SRI 38	✓





CONTRACTORS

COMMERCIAL

Cingle Hait



4 x 12 100 x 300 x 80mm 3 % x 11 % x 3 %" 288 units/Bundle .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.



		RECTANGLE
Bundle Type	RANDOM	SINGLE
Plant Produced	ELKHORN	ELKHORN
Thickness (mm)	70 MM	70 MM
Bundle	94.19	94.19

	Bundle	94.19	94.19
SQFT PER	Layer	11.77	11.77
SQFIPER	Section	-	-
	Stone	-	0.34

PER BUNDLE	Layers	8.00	8.00
PER BUNDLE	Sections	-	-

SOLDIER LNFT PER	SqFt	-	0.71
	Section	-	-
SOLDIER LINFT FER	Layer	-	8.33
	Bundle	-	66.67

SAILOR LNFT PER	SqFt	1.24	1.42	
	Section	-	-	
	Layer	14.57	16.67	
		Bundle	116.56	133.33

	SqFt	-	2.97
UNITS PER	Section	-	-
	Bundle	160.00	280.00

	Layer	372	361
LBS PER	Section	-	-
	Bundle	2,976	2,884

COLORS	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	-	✓
Granite	SR n/a SRI n/a	✓	-
River	SR n/a SRI n/a	✓	-
Sierra	SR n/a SRI n/a	ſ	_







#### **APPEARANCE**

Edge Detail - Zero Surface Texture - Textured Joint Spacing - 3 mm

#### **TECHNOLOGIES CLASSIC**

Budget-friendly traditional product mix


#### **CLASSIC COAT**

Factory-sealed to protect surface texture and color

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS



Westport Fixed Random\_A

Westport Fixed Random\_B



CONTRACTORS









SQUARE 254 x 254 x 70mm 10 x 10 x 2 34" 56 units/Bundle .67 Sq.Ft./Stone



RECTANGLE 127x 254 x 70mm  $5 \times 10 \times 2 \frac{3}{4}$ " 72 units/Bundle .34 Sq.Ft./Stone





Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

# Westport<sup>™</sup> Smooth



## **APPLICATIONS**



#### **APPEARANCE**

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 3 mm

#### **TECHNOLOGIES CLASSIC**

Budget-friendly traditional product mix


#### **CLASSIC COAT**

Factory-sealed to protect surface texture and color


#### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

#### LAYING PATTERNS







Westport Fixed Random\_B

			5 x 10
	Bundle Type	RANDOM	SINGLE
	Plant Produced	ELKHORN	ELKHORN
	Thickness (mm)	70 MM	70 MM
	Bundle	94.19	94.19
SQFT PER	Layer	11.77	11.77
SQFI PER	Section	-	-
	Stone	0.59	0.34
PER BUNDLE	Layers	8.00	8.00
PER BUNDLE	Sections	-	-
	SqFt	-	0.71
SOLDIER LNFT PER	Section	-	-
SOLDIEK LNF1 PER	Layer	-	8.33

	Layer	_	0.55
	Bundle	-	66.67
SAILOR LNFT PER	SqFt	1.24	1.42
	Section	-	-
	Layer	14.57	16.67
	Bundle	116.56	133.33

	Bundle	160.00	280.00
	1	270	204
	Layer	3/2	361
LBS PER	Section	_	-

COLORS	Reflectance	Stock	Stock
Charcoal	SR n/a SRI n/a	-	✓
Granite	SR n/a SRI n/a	✓	-
River	SR n/a SRI n/a	/	-
Sierra	SR n/a SRI n/a	/	-



Random Bundle



LARGE RECTANGLE 254x 380 x 70mm 10 x 15 x 2 ¾" 32 units/Bundle 1.01 Sq.Ft./Stone



SQUARE 254 x 254 x 70mm  $10 \times 10 \times 2 \frac{3}{4}$ " 56 units/Bundle .67 Sq.Ft./Stone



SqFt

Section

Bundle

**UNITS PER** 

RECTANGLE 127x 254 x 70mm 5 x 10 x 2 ¾" 72 units/Bundle .34 Sq.Ft./Stone



127x 254 x 70mm

1.70

2,976

2.97

2,884

5 x 10 x 2 ¾" 280 units/Bundle .34 Sq.Ft./Stone

53

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 90 and Important Notes on page 94. All measurements are nominal. Contact Unilock for more information.

















#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### **APPEARANCE**

Surface Texture - Smooth

#### **TECHNOLOGIES**

#### CLASSIC™

Budget-friendly traditional product mix

#### ANTIOUED™

Distressed, timeworn finish

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

## SUNSET FIREPIT KITS

Located on page 80





Single Units



	TAPERED	STANDARD
Bundle Type	SINGLE	SINGLE
Plant Produced	MULTI-PLANT	MULTI-PLANT
Thickness (mm)	100 MM	100 MM

	Bundle	36.00	32.00
FCFT PER	Layer	6.00	5.33
	Stone	0.25	0.33

PER BUNDLE	Layers	6.00	6.00
PER BUNDLE	Sections	-	4.00

I NET PER	Bundle	108.00	96.00
LNFIPER	Unit	0.75	1.00

	SqFt	4.00	3.00
UNITS PER	Section	-	24.00
	Bundle	144.00	96.00

	Layer	488	491
LBS PER	Section	-	736
	Bundle	2,930	2,944

COLORS	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	/	-
Limestone	SR.n/a SRI n/a	-	✓
Sandstone	SR.n/a SRI n/a	/	✓
Sierra	SR.n/a SRI n/a	/	✓





CONTRACTORS

COMMERCIAL







STANDARD 300 x 100 x 200mm 11 1/8 x 3 1/8 x 7 1/8" 96 units/Bundle .33 Fc.Ft./Stone

Notes: SMALL TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY. Maximum height is 24" (under optimum conditions). "Based on 12" deep wall coverage = 21.4 sqft per bundle. Based on an 8" deep wall coverage = 32 sqft per bundle. Ledgestone™, Brussels Block\* XL or 6" x 12" Fullnose complement as a possible coping unit. All measurements are nominal. Contact Unilock for more information.

Dura Hold<sup>®</sup> CLASSIC



#### **APPLICATIONS**





#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### APPEARANCE

Surface Texture - Smooth

#### **TECHNOLOGIES**

#### CLASSIC™

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		TIE-BACK	1/2 COPING	CORNER 45°
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	GORMLEY	GORMLEY	GORMLEY
	Thickness (mm)	300 MM	300 MM	300 MM
	5 "	0.00	0.00	
	Bundle	2.00	3.00	7.04
FCFT PER	Layer	2.00	3.00	7.04
	Stone	2.00	3.00	7.04
	Layers	1.00	1.00	1.00
PER BUNDLE	Sections	-	-	1.00
LNFT PER	Bundle	-	3.00	-
LMITTEN	Unit	-	3.00	
	SqFt	0.50	0.33	0.14
UNITS PER	Sections	-	-	-
	Bundle	1.00	1.00	1.00
	Layer	1,660	800	1,480
LBS PER	Sections	1,000	-	1,400
LDSFER	Bundle	1,660	800	1,480
	1	.,,,,		.,.00

COLORS	Reflectance	Stock	Stock	Stock
Natural	SR n/a SRI n/a	S0	S0	S0



COMMERCIAL



Single Units

**TIE-BACK**1830 x 300 x 600mm
72 x 11 % x 23 5/8"
1 unit/Bundle
2.00 Fc.Ft./Stone



1/2 COPING 915 x 300 x 600mm 36 x 11 % x 23 5%" 1 unit/Bundle 3.00 Fc.Ft./Stone



**CORNER 45°**1520 x 300 x 600mm
59 % x 11 % x 23 5%"
1 unit/Bundle
7.04 Fc.Ft./Stone

55

Notes: \*Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed—end coping units are closed on both ends so that they may be used as left or right units. Tie—back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone\* Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.

Estate Wall<sup>™</sup> CLASSIC



#### **APPLICATIONS**

















#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### APPEARANCE

Surface Texture - Split

## TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

#### ANTIQUED™

Distressed, timeworn finish

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

			CORNER	COPING TAPERED
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
	Bundle	31.25	20.83	18.74
FCFT PER	Layer	6.25	4.17	2.34
	Stone	-	0.52	0.26
PER BUNDLE	Layers	5.00	5.00	8.00
	Sections	4.00	4.00	3.00
	Bundle	62.30	41.60	66.00
LNFT PER	Unit	1.04	1.04	0.92
	SqFt	-	1.92	3.84
UNITS PER	Section	15.00	10.00	24.00
	Bundle	60.00	40.00	72.00
		222	450	200
	Layer	608	453	299
LBS PER	Section	760	566	797
	Bundle	3,040	2,264	2,392

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	✓	✓
River	SR.n/a SRI n/a	✓	<b>✓</b>	✓
Sandstone	SR.n/a SRI n/a	✓	1	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓





CONTRACTORS

COMMERCIAL



**LARGE TAPERED** 380 x 150 x 230mm 15 x 5 % x 9" 20 units/Bundle .63 Fc.Ft./Stone



**MEDIUM TAPERED** 320 x 150 x 230mm 12 % x 5 % x 9" 20 units/Bundle .52 Fc.Ft./Stone



**SMALL TAPERED** 250 x 150 x 230mm 9 % x 5 % x 9" 20 units/Bundle .42 Fc.Ft./Stone



Single Units

**CORNER**320 x 150 x 230mm
12 5% x 5 % x 9"
40 units/Bundle
.52 Sq.Ft./Stone



**COPING TAPERED** 320 x 75 x 300mm 12 % x3 x 11 %" 72 units/Bundle .26 Sq.Ft./Stone

Notes: 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. **Quarry tubing is only added to orders if requested.** Ledgestone<sup>™</sup>, Olde Quarry<sup>™</sup> coping, Brussels Block<sup>®</sup> XL, Brussels Fullnose<sup>™</sup> or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.















#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### APPEARANCE

Surface Texture - Smooth

#### **TECHNOLOGIES**

CLASSIC™

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

			PILLAR UNIT
	Bundle Type	RANDOM	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	100 MM	100 MM
	Bundle	31.91	29.97
FCFT PER	Layer	10.64	9.99
	Stone	-	0.33
	Layers	3.00	3.00
PER BUNDLE	Sections	-	3.00
	Bundle	94.46	-
LNFT PER	Unit	1.50	-
	SqFt	_	3.00
UNITS PER	Section	-	30.00
	Bundle	63.00	90.00
		0.45	
	Layer	948	890
LBS PER	Section	-	890

COLORS	Reflectance	Stock	Stock
Granite	SR.n/a SRI n/a	/	✓
Graphite	SR.n/a SRI n/a	/	1
River	SR.n/a SRI n/a	/	✓
Sierra	SR.n/a SRI n/a	/	1

Bundle




2,845




2,670

CONTRACTORS

COMMERCIAL





Lineo spacers are used to provide shadow effect during installation and are provded with your Lineo product. 1 Package = 144 Spacers / 68 T's

Single Unit

Random Bundle



**XL RECTANGLE** 600 x 100 x 200mm 23 % x 3 % x 7 % 18 units/Bundle .33 Fc.Ft./Stone



**LARGE RECTANGLE** 500 x 100 x 200mm 19 ¾ x 3 % x 7 % 15 units/Bundle .33 Fc.Ft./Stone



**RECTANGLE** 400 x 100 x 200mm 15 ¾ x 3 % x 7 % 15 units/Bundle .55 Fc.Ft./Stone



**SMALL RECTANGLE** 300 x 100 x 200mm 11% x 3% x 7% 15 units/Bundle .44 Fc.Ft./Stone



**PILLAR UNIT**300 x 100 x 200mm
11 % x 3 % x 7 %
90 units/Bundle
.33 Fc.Ft./Stone

57

Notes: **SOLD IN FULL BUNDLES ONLY** and is **produced on a required, refundable skid.** Lineo spacers are shipped with random wall bundles to create even spacing between units. Ledgestone<sup>™</sup>, Unilock Natural Stone or 6" x 12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.











#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Split

#### **TECHNOLOGIES**

#### $REALA^{\mathsf{m}}$

Cast from natural stone wall

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER / PILLAR
	Bundle Type	RANDOM	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	102 MM	102 MM
	Bundle	11.07	12.95
FCFT PER	Layer	2.214	2.59
	Stone	-	-
	Layers	5.00	5.00
PER BUNDLE	Sections	-	-
	Bundle	33.00	-
LNFT PER	Unit	-	-

	Bundle	25.00	20.00
	Layer	242.31	173.4
LBS PER	Section	-	-

SqFt

Section

Bundle

**UNITS PER** 

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	<b>✓</b>	/
Coastal Slate	SR n/a SRI n/a	/	/

1,211.05

867.01



# **LARGE WEDGE**26.96 (23.97) x 4 x 9" 685 (609) x 102 x 229mm 5 units/Bundle .71 Fc.Ft./Stone



**MEDIUM WEDGE** 18.97 (15.98) x 4 x 9" 482 (406) x 102 x 229mm 10 Units/ Bundle .48 Fc.Ft./Stone



**SMALL WEDGE** 10.98 (8.0) x 4 x 9" 279 (203) x 102 x 229mm 10 Units/ Bundle .26 Fc.Ft./Stone



Corner/Pillar Bundle

**CORNER/PILLAR UNIT** 14.96 (13.46) x 4 x 9" 380 (342) x 102 x 229mm 20 Units/ Bundle .647 Fc.Ft./Stone

(10 rights + 10 lefts per bundle)

Notes: Sold in full bundles only and is produced and sold on a required, refundable skid. While coping is optional with Mackinaw wall, if you are looking for coping, Ledgestone" or Unilock Natural Stone complement it well. All measurements are nominal. Contact Unilock for more information.

# Olde Quarry™



#### **APPLICATIONS**















#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### **APPEARANCE**

Surface Texture - Standard

#### **TECHNOLOGIES**

#### **CLASSIC™**

Budget-friendly traditional product mix

#### ANTIQUED™

Distressed, timeworn finish

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER	COPING
	Bundle Type	RANDOM	SINGLE	SINGLE
	Plant Produced	WISCONSIN	CHICAGO	CHICAGO
	Thickness (mm)	114 MM	114 MM	75 MM
	Bundle	33.75	30.89	24.00
FCFT PER	Layer	5.63	6.18	3.00
	Stone	-	-	-
PER BUNDLE	Layers	6.00	5.00	8.00
I LIV DONDEL	Sections	5.00	4.00	4.00
LNFT PER	Bundle	90.00	82.40	96.00
	Unit	-	-	-
	SqFt	-	2.59	4.00
UNITS PER	Section	18.00	20.00	24.00
	Bundle	90.00	80.00	96.00
	Layer	521	630	380
LBS PER	Section	625	788	760
	Bundle	3,125	3,150	3,039

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	<b>✓</b>	<b>✓</b>	✓
River	SR.n/a SRI n/a	<b>✓</b>	<b>✓</b>	✓
Sandstone	SR.n/a SRI n/a	<b>✓</b>	<b>✓</b>	✓
Sierra	SR.n/a SRI n/a	✓	✓	✓



CONTRACTORS



**15" LARGE TAPERED** 380 x 114 x 230mm 15 x 4 ½ x 9" 30 units/Bundle .47 Fc.Ft./Stone



**12" MEDIUM TAPERED** 305 x 114 x 230mm 12 x 4 ½ x 9" 30 units/Bundle .38 Fc.Ft./Stone



**9" SMALL TAPERED** 230 x 114 x 230mm 9 x 4 ½ x 9" 30 units/Bundle .28 Fc.Ft./Stone



Single Units

**CORNER**300 x 114 x 230mm
11 % x 4 ½ x 9"
80 units/Bundle
.39 Fc.Ft./Stone



**COPING TAPERED** 305 x 75 x 305mm 12 x 3 x 12" 96 units/Bundle .25 Fc.Ft./Stone

Notes: Structural retaining walls greater than 2' high require professional engineering. Quarry Coping sold and produced on a returnable, refundable pallet. Quarry tubing is added to orders when requested. Tubing may be used to set back walls. Ledgestone<sup>™</sup>, Olde Quarry "Coping, Brussels Block' XL, Brussels Fullnose" or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.















#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### **APPEARANCE**

Surface Texture - Standard

#### **TECHNOLOGIES**

#### CLASSIC™

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		WALL	CORNER
Bundle Type		RANDOM	SINGLE
	Plant Produced	WISCONSIN	WISCONSIN
	Thickness (mm)	114 MM	114 MM
	Bundle	33.75	18.24
FCFT PER	Layer	5.63	6.08
	Stone	-	0.38
PER BUNDLE	Layers	6.00	3.00
	Sections	5.00	-
	Bundle	-	18.24
LNFT PER	Unit	-	0.38
	SqFt	-	2.65
UNITS PER	Section	18.00	-
UNITOFER	Layer	15.00	16.00
	Bundle	90.00	48.00
	Layer	498	641
LBS PER	Section	598	041
LDOTEK	Bundle	2,988	1,922

COLORS	Reflectance	Stock	Stock
Midnight Charcoal	SR.n/a SRI n/a	/	/
Sandstone	SR.n/a SRI n/a	/	✓
Natural Grey	SR.n/a SRI n/a	/	✓



**15**"

**15" LARGE TAPERED** 380 x 114 x 230mm 15 x 4 ½ x 9" 30 units/Bundle .33 Fc.Ft./Stone



12" MEDIUM TAPERED 305 x 114 x 230mm 12 x 4 ½ x 9" 30 units/Bundle .33 Fc.Ft./Stone



**9" SMALL TAPERED** 230 x 114 x 230mm 9 x 4 ½ x 9" 30 units/Bundle .55 Fc.Ft./Stone





**CORNER**306.6 x 114 x 228.6mm
12 x 4 ½ x 9"
48 units/Bundle
.38Fc.Ft./Stone

**CLASSIC** 

Notes: Corner and wall bundles are produced and sold on a required, refundable skid. Structural retaining walls greater than 2' high require professional engineering. Connector units provided with every bundle upon request. Use plastic connectors on set-back walls. Quarry tubing is added to orders when requested. Tubing may be used to set back walls. Ledgestone<sup>™</sup>, Olde Quarry<sup>™</sup> Coping, Brussels Block 'XL, Brussels Fullnose or 6" x 12" Fullnose complement as a possible coping. All measurements are nominal. Contact Unilock for more information.













#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Split

#### **TECHNOLOGIES**

#### CLASSIC™

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER	XL UNIT	COPING
	Bundle Type	DOUBLE	SINGLE	DOUBLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
			1	
	Bundle	30.01	26.66	20.34
FCFT PER	Layer	10.00	5.33	2.91
	Stone	1.67	1.50	0.48
		0.00	5.00	7.00
PER BUNDLE	Layers	3.00	5.00	7.00
	Sections	6.00	-	2.00
LNET DED	Bundle	-	53.34	82.95
LNFT PER	Unit	-	1.33	1.97
	SqFt	0.60	_	2.06
UNITS PER	Section	3.00	-	21.00
	Bundle	18.00	40.00	42.00
	Layer	547	618	411
LBS PER	Section	274	-	1,437
	Bundle	1,641	3,091	2,875

COLORS	Reflectance	Stock	Stock	Stock
Granite	SR.n/a SRI n/a	✓	1	1
Nevada	SR.n/a SRI n/a	<b>✓</b>	<b>✓</b>	<b>✓</b>
Sierra	SR.n/a SRI n/a	/	1	1



CONTRACTORS



# **CORNER**200 x 150 x 300mm 7 % x 5 % x 11 %" 18 Double units/Bundle 36 Single units/Bundle 1.67 Fc.Ft./Stone



**XL TAPERED UNIT** 400 x 150 x 300mm 15 ¾x 5 ½ x 11 ½" 32 Single units/Bundle .67 Fc.Ft./Stone



**COPING**300 x 75 x 300mm
11% x 3 x 11 %"
42 Double units/Bundle
.48 Fc.Ft./Stone

Notes: **XL UNITS ARE SOLD IN FULL BUNDLES ONLY. Corner and XL Units are produced and sold on a required, refundable skid.** Maximum height - 36" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. The set back on Pisa wall is 3½" every course or 1½" every 2 courses. Retaining wall engineering software is also available free of charge at www.unilock.com. Walls greater than 4' in height require professional engineering. Coping bundles are Double units, packaged with 16 closed end pieces per bundle. (8 Left & 8 Right). 12" Closed End Coping pieces are not sold separately. All measurements are nominal. Contact Unilock for more information.

Sold Individually

Pisa<sup>™</sup> Smooth XL CLASSIC



#### **APPLICATIONS**









#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Smooth

#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### **TECHNOLOGIES**

CLASSIC™

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		XL CORNER	XL TAPERED	COPING & CLOSED-END / COPING
	Bundle Type	SINGLE	SINGLE	BUNDLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	75 MM
	Bundle	58.15	25.84	15.50
FCFT PER	Layer	11.63	5.17	1.94
	Stone	0.97	0.65	0.32
	1.	1		
PER BUNDLE	Layers	5.00	5.00	8.00
	Sections	-	-	3.00
LNET DED	Bundle	-	-	62.99
LNFT PER	Unit	-	-	1.31
	SqFt	1.03	1.55	3.10
UNITS PER	Section	-	-	16.00
	Bundle	60.00	40.00	48.00
		<b>-</b> 40	207	205
	Layer	719	627	285
LBS PER	Section	-	-	761
	Bundle	3,593	3,135	2,282

COLORS	Reflectance	Stock	Stock	Stock
Fieldstone	SR n/a SRI n/a	1	1	✓
Granite	SR n/a SRI n/a	✓	1	✓
Midnight Charcoal	SR n/a SRI n/a	1	1	✓
Natural Grey	SR n/a SRI n/a	-	-	✓
Sandstone	SR n/a SRI n/a	-	-	✓







COMMERCIAL

Sold Individually





XL TAPERED 400 x 150 x 300mm 15 3/4 x 5 % x 11 %" 40 units/Bundle 0.65 Fc.Ft./Stone



**COPING**400 x 75 x 300mm
15 3/4 x 3 x 11 1/8"
24 units/Bundle
0.32 Fc.Ft./Stone



**CLOSED-END / COPING** 400 x 75 x 300mm 15 34 x 3 x 11 1/6" 24 units/Bundle 0.32 Fc.Ft./Stone

Notes: **XL CORNER AND TAPERED UNITS ARE SOLD IN FULL BUNDLES ONLY AND PRODUCED ON A REQUIRED, REFUNDABLE SKID.** Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

2 Unit Bundle



CORNER

WALL

128.00



#### **APPLICATIONS**













#### **APPEARANCE**

Edge Detail - Zero Surface Texture - Textured

## **TECHNOLOGIES**

REALA™

Cast from natural stone

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

	Bundle Type	RANDOM	RANDOM
	Plant Produced		AYR
	Thickness (mm)	57 MM	57 MM
	Bundle	24.30	16.21
FCFT PER	Layer	3.04	4.05
	Stone	-	-
	Layers	8.00	4.00
PER BUNDLE	Sections	-	-
LNFT PER	Bundle	130.69	-
LNFIFER	Unit	-	-
	SaFt	_	2.47

	Layer	249	293
LBS PER	Section	-	-
	Bundle	1 990	1 173

Section

Bundle

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓ ·	✓
Coastal Slate	SR n/a SRI n/a	1	✓





40.00

CONTRACTORS

COMMERCIAL

Corner Bundle



LONG CORNER UNIT  $17\frac{1}{2} \times 9 - 10 \times 2\frac{1}{4}$ " 450 x 230-250 x 57mm 20 units/Bundle



SHORT CORNER UNIT 14½ x 9-10 x 2¼"

375 x 230-250 x 57mm 20 units/Bundle

Random Bundle



STANDARD UNIT 1  $8 \times 9 - 10 \times 2\frac{1}{4}$ " 200 x 230-250 x 57mm 32 units/Bundle



STANDARD UNIT 2 12 x 9-10 x 21/4" 300 x 230-250 x 57mm 32 units/Bundle



**UNITS PER** 

STANDARD UNIT 3 12 x 9-10 x 21/4" 300 x 230-250 x 57mm 32 units/Bundle



STANDARD UNIT 4 17 x 9-10 x 21/4" 425 x 230-250 x 57mm 32 units/Bundle













#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products: contractor.unilock.com

#### APPEARANCE

Edge Detail - n/a Surface Texture - Smooth

#### **TECHNOLOGIES**

#### CLASSIC™

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		STANDARD	COPING
	Bundle Type	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO
	Thickness (mm)	180 MM	180 MM
	Bundle	20.88	20.88
FCFT PER	Layer	6.96	6.96
	Stone	1.74	1.74
		2.22	0.00
PER BUNDLE	Layers	3.00	3.00
	Sections	-	-
LNET DED	Bundle	35.43	35.43
LNFT PER	Unit	2.45	2.45
	SqFt	0.57	0.57
LINUTO DED	-		0.57
UNITS PER	Section	-	-
	Bundle	12.00	12.00
	Layer	898	901
LBS PER	Section	-	-
	Bundle	2,695	2,702

COLORS	Reflectance	Stock	Stock
Fieldstone	SR n/a SRI n/a	/	/
Granite	SR n/a SRI n/a	<b>✓</b>	✓
Midnight Charcoal	SR n/a SRI n/a	/	/





CONTRACTORS

COMMERCIAL



STANDARD 900 x 180 x 290mm  $35 \frac{1}{2} \times 7 \times 11 \frac{1}{2}$ " 12 units/Bundle 1.94 Fc.Ft./Stone



**COPING** 900 x 180 x 290mm  $35 \frac{1}{2} \times 7 \times 11 \frac{1}{2}$ " 12 units/Bundle 1.94 Fc.Ft./Stone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

Single Units

SienaStone<sup>™</sup> CLASSIC



#### **APPLICATIONS**







#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Split

#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### **TECHNOLOGIES**

#### CLASSIC™

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		CORNER 90	CORNER 45	STANDARD	STANDARD 925	COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
-	Thickness (mm)	185 MM	185 MM	185 MM	185 MM	185 MM
	1					
	Bundle	17.19	13.50	12.00	6.00	12.00
FCFT PER	Layer	5.73	4.50	4.00	2.00	4.00
	Stone	2.87	2.25	2.00	2.00	2.00
	1					
PER	Layers	3.00	3.00	3.00	3.00	3.00
BUNDLE	Sections	-	-	-	-	6.00
LNFT	Bundle	-	-	19.50	9.75	19.50
PER	Unit	-	-	3.25	3.25	3.25
	SqFt	0.35	0.44	0.50	0.50	0.50
UNITS PER	Section	-	-	-	-	1.00
	Bundle	6.00	6.00	6.00	3.00	6.00
	Layer	954	790	926	872	919
LBS PER	Section	-	-	-	-	459
	Bundle	2,862	2,370	2,778	2,617	2,756

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Granite	SR n/a SRI n/a	-	-	-	-	1
Nevada	SR n/a SRI n/a	S0	S0	S0	S0	1
Sierra	SR n/a SRI n/a	SO	SO	S0	SO	1





CONTRACTORS

COMMERCIAL



**CORNER 90°** 925 x 185 x 500mm 36 ½ x 7 3/8 x 19 3/4" 6 units/Bundle 2.87 Fc.Ft./Stone

Single Units



**CORNER 45°** 925 x 185 x 500mm 36 ½ x 7 3/8 x 19 3/4" 6 units/Bundle 2.25 Fc.Ft./Stone



**STANDARD** 1000 x 185 x 500mm 39 3/6 x 7 3/6 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone



**STANDARD 925** 1000 x 185 x 925mm 39 % x 7 % x 36 ½" 3 units/Bundle 2.00 Fc.Ft./Stone



**COPING**1000 x 185 x 500mm
39 3/6 x 7 3/6 x 19 3/4"
6 units/Bundle
2.00 Fc.Ft./Stone

Notes: For Special Order units - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is sold on a required, refundable skid. Coping units can be sold individually to construct stepss. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.





#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Standard

#### **CROSS SECTIONS**

Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### **TECHNOLOGIES**

#### CLASSIC™

Budget-friendly traditional product mix

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

	48" STEP
Bundle Type	SINGLE
Plant Produced	GORMLEY
Thickness (mm)	180 MM

	Bundle	13.95
FCFT PER	Layer	4.65
	Stone	2.33

PER BUNDLE	Layers	3.00
PER BUNDLE	Sections	-

LNFT PER	Bundle	24.00
LNFIPER	Unit	4.00

	SqFt	0.43
UNITS PER	Section	-
	Bundle	6.00

	Layer	1,081
LBS PER	Section	-
	Bundle	3,242

COLORS	Reflectance	Stock
Dusk	SR.n/a SRI n/a	/





CONTRACTORS

COMMERCIAL

Single Unit



**48" STEP** 1200 x 180 x 500mm 47 1/4 x 7 x 19 3/4" 6 units/Bundle 2.33 Fc.Ft./Stone



#### **APPLICATIONS**

















#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Multiple (see below)

#### **TECHNOLOGIES**

#### ENDURACOLOR™

Refined surface and long-lasting color

## **COLORFUSION™** (UMBRIANO®)

Subtly mottled colored finish


#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits




Download the U-Cara Modular Fireplace Installation Guide.



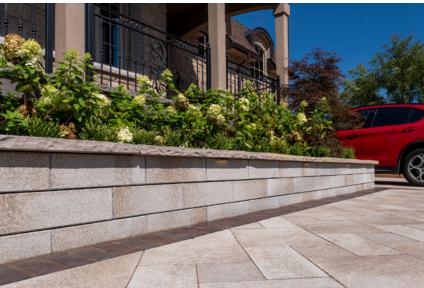





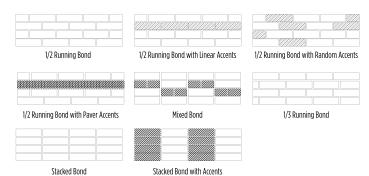





Smooth Finish








Series Finish









	Fascia Panels	STANDARD SMOOTH	CLOSED-END SMOOTH	STANDARD UMBRIANO	CLOSED-END UMBRIANO	3" SERIES	STANDARD PITCHED	CLOSED-END PITCHED
	Bundle Type	SINGLE	MULTI	SINGLE	MULTI	SINGLE	SINGLE	MULTI
	Plant Produced	CHICAGO	CHICAGO	GEORGETOWN	GEORGETOWN	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	150 MM	150 MM	71 MM	150 MM	150 MM
FCFT PER	Bundle	61.52	54.18	61.52	54.18	59.32	61.52	54.18
	Crate	-	-	-	-	-	-	-
	Sections	10.25	9.03	10.25	9.03	9.89	10.25	9.03
	Stone	0.73	1.29	0.73	1.29	0.18	0.73	1.29
	Layers	6.00	6.00	6.00	6.00	6.00	6.00	6.00
PER BUNDLE	Sections	-	-	-	-	-	-	-
	Bundle	129.50	104.86	129.50	107.94	-	129.50	107.94
LNFT PER	Unit	1.54	2.50	1.54	2.57	-	1.54	2.57
	SqFt	1.37	0.78	1.37	0.78	5.66	1.37	0.78
	Sections	-	-	-	-	-	-	-
UNITS PER	Crate	-	-	-	-	-	-	-
	Bundle	84.00	42.00	84.00	42.00	336.00	84.00	42.00
LBS PER	Layer	275	207	344	207	250	317	236
	Sections	-	-	-	-	-	-	-
	Crate	-	-	-	-	-	-	-
	Bundle	1,648	1,241	2,067	1,240	1,501	1,904	1,416
COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Bavarian	n/a	1	1	-	-	-	1	1
Champagne	n/a	✓ <b>/</b>	✓	-	-	-	-	-
Dark Charcoal	n/a	1	✓	-	-	-	-	-
Fossil	n/a	-	-	-	-	-	✓	✓
French Grey	n/a	-	-	✓	✓	-	-	-
Granite Fusion	n/a	1	1	-	-	-	✓	/
Onyx Black	n/a	-	-	-	-	1	-	-
Opal Blend	n/a	✓	✓	-	-	-	-	-
Summer Wheat	n/a	-	-	✓	<b>✓</b>	-	-	-

#### FASCIA PANELS STYLES



**6" STANDARD** 5% x 18 % x 2 %" 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone



**6" PITCHED** 5 % x 18 3% x 2 3/4" 150 x 466 x 70mm 84 units/Bundle .73 Fc.Ft./Stone



**3" SERIES PANEL** 2% x 9 x 2 3% " 71 x 231 x 60 mm 336 units/Bundle .18 Fc.Ft./Stone

#### FASCIA PANELS FINISHES









SMOOTH

PITCHED

UMBRIANO®

SERIES

#### 2 UNIT STANDARD CLOSE-END BUNDLE



CLOSED-END FASCIA PANEL 5% x 21 x 2 %" 150 x 530 x 60mm 42 units/Bundle 1.29 Fc.Ft./Stone 24 Rights & 18 Lefts



STANDARD FASCIA HALF PANEL 6 x 9 ½ x 2 ¾8" 150 x 233 x 60mm 42 units/Bundle 1.29 Fc.Ft./Stone

#### 2 UNIT PITCHED CLOSE-END BUNDLE



CLOSED-END PITCHED PANEL 5 % × 20 % × 2 ¾" 150 × 530 × 70mm 42 units/Bundle 1.29 Fc.Ft./Stone 24 Rights & 18 Lefts



PITCHED FASCIA HALF PANEL 6 x 9 ½ x 2 ¾6" 150 x 233 x 70mm 42 units/Bundle 1.29 Fc.Ft./Stone 24 Rights & 18 Lefts

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

Available in Onyx Black only



		LAVANO STANDARD	SUBWAY STANDARD	CLOSED END
Bundle Type		SINGLE	SINGLE	BUNDLE
Plant Produced		CHICAGO	CHICAGO	CHICAGO
Thickness (mm)		150 MM	150 MM	150 MM
	Bundle	61.52	61.52	54.18
FCFT PER	Layer	10.25	10.25	9.03
	Stone	0.73	0.73	1.29

#### **APPLICATIONS**

















#### **CROSS SECTIONS**

All Cross Sections are available on Unilock's Contractor web site under Products:

contractor.unilock.com

#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Smooth (Subway) Textured (Lavano)

#### **TECHNOLOGIES**

#### ENDURACOLOR™

Refined surface and long-lasting color

#### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

	Bundle	1,648	1,709	1,240
LBS PER	Section	-	-	-
	Layer	275.00	285.00	207.00
	Bundle	84.00	84.00	42.00
UNITS PER	Section	-	-	-
	SqFt	1.37	1.37	0.78
LNITFLIX	Unit	1.54	1.54	2.50
LNFT PER	Bundle	129.50	129.50	104.86
	Sections	-	-	-

6.00

6.00

6.00

COLORS	Reflectance	Stock	Stock	Stock
Dark Charcoal	SR n/a SRI n/a	-	<b>✓</b>	<b>/</b>
Fossil	SR n/a SRI n/a	1	-	
Granite Fusion	SR n/a SRI n/a	✓	-	
Ivory	SR n/a SRI n/a	-	/	/
Opal	SR n/a SRI n/a	-	/	/





CONTRACTORS

COMMERCIAL



#### LAVANO STANDARD FASCIA PANEL

5 % x 18 % x 2 % " 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone



Closed-End Bundle

Closed-End Bundle

#### LAVANO HALF FASCIA PANEL

Layers

PER BUNDLE

5 % x 9 ½ x 2 3/8" 150 x 233 x 60mm



## LAVANO CLOSED-END FASCIA PANEL

5% x 20 % x 2 3/8" 150 x 530 x 60mm



#### SUBWAY STANDARD Fascia Panel

5 % x 18 % x 2 % " 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone



#### SUBWAY HALF FASCIA PANEL

5 % x 9 ¼ x 2 3/8" 150 x 233 x 60mm



# SUBWAY CLOSED-END FASCIA PANEL

5% x 20 % x 2 3/8" 150 x 530 x 60mm

# U-Cara<sup>®</sup> Multi-Face Wall System



ENDURACOLOR™ Refined surface and long-lasting color

**TECHNICAL** INFORMATION

**COLORFUSION™** (UMBRIANO) Subtly mottled colored finish

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits

#### **APPLICATIONS**













## 4

#### **CROSS SECTIONS**


All Cross Sections are available on Unilock's Contractor web site under Products:


contractor.unilock.com


#### **APPEARANCE**

Edge Detail - n/a Surface Texture - Smooth, Standard, Series Exposed, Umbriano® Mottled, Pitched & Flamed

## U-CARA RETAINING WALL GEOGRID SECTION

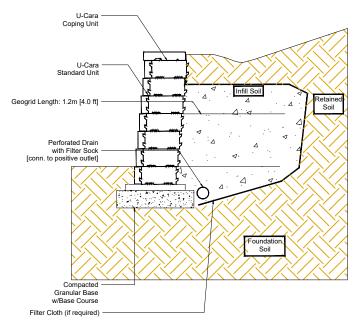

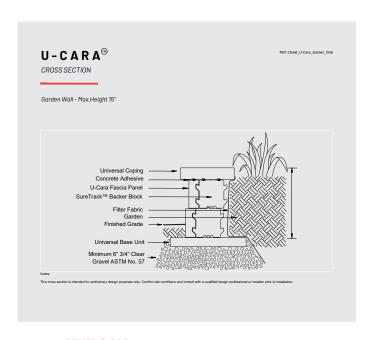

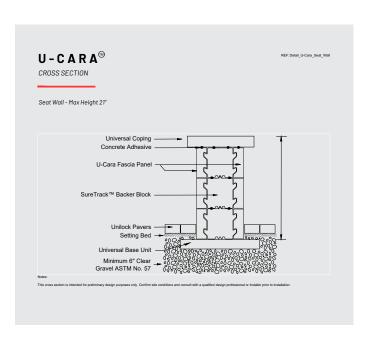

Sure Track Components



**CORNER BACKER** 5 % x 6 % x 11 5/8" 150 x 175 x 294mm 56 units/Bundle



**LARGE BACKER** 5 % x 7 % x 11 5%" 150 x 200 x 294mm 63 units/Bundle



**STANDARD BACKER** 5 % x 7 % x 5 %" 150 x 200 x 150mm 105 units/Bundle

		LARGE/CORNER/ PILLAR BACKER	LARGE BACKER	STANDARD BACKER
	Bundle Type	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	150 MM	150 MM	150 MM
	Bundle	15.82	20.35	33.91
FCFT PER	Layer	3.96	6.78	11.30
TOTT LIK	Stone	0.28	0.32	0.32
PER BUNDLE	Layers	4.00	3.00	3.00
T EN BONDEL	Sections	-	-	-
	Bundle	-	41.34	69.99
LNFT PER	Unit	-	0.66	0.67
	SqFt	3.54	3.10	3.10
UNITS PER	Sections	-	-	-
	Bundle	56.00	63.00	105.00
	Layer	521	922	819
LBS PER	Sections	-	-	-
	Bundle	2,085	2,766	2,458



CONTRACTORS



COMMERCIAL

Recommended



**UNIVERSAL U-GRIP™ BASE** 14 x 19 x 2 1/4" 355 x 482 x 55mm

See page 79 for more information



**Extra Components** 

SURE TRACK CORNER INSERT L = 2"

L = 2" 50mm 40 Inserts per bag RS:ACC 245


Sold in full bags only

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.

# U-Cara® Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.







## NO. MODEL DESCRIPTION

		DECORN HOR
UCARA000001	URS	UCARA 8' RAIL (10/PACK)
UCARA000003	URS	ALIGNMENT BARS 39"(10/PACK)
UCARA000005	UL-HCK	HEIGHT CONVERSION KIT
UCARA000006	UL-HCK-OS	HEIGHT CONVERSION KIT OVERSIZED
UCARA000007	UL-OSK	CABINET DEPTH CHANGE KIT
RS-UCARA000009	UL-FIR	U-CARA FIREPLACE
RS-UCARA000010	UL-FIR-M	U-CARA FIREPLACE MANTLE
RS-UCARA000014	UL-HCK-CC-OS	HEIGHT CONVERSION CORNER CABINET OVERSIZED
RS-UCARA000015	UL-HCK-CC	U-CARA HEIGHT CONVERSION CORNER CAB
RS-UCARA000016	UL-FIR-MW	U-CARA FIREPLACE MANTLE WIDE UNIT
RS-UCARA000017	UL-FIR-CH	U-CARA U-CARA FIREPLACE CHIMNEY UNIT
RS-UCARA000018	UL-FIR-CH-MW	U-CARA FIREPLACE CHIMNEY WIDE UNIT
RS-UCARA000019	UL-FIR-RTN	U-CARA FIREPLACE RETURN
RS-UCARA000020	UL-FIR-RTN-0S	U-CARA FIREPLACE RETURN OVERSIZED
UCARA001000	UL-GC	UNIVERSAL GRILL CABINET (fits 36-42" grill)
UCARA002000	UL-BC	BASE CABINET (fits fire table or fridge)
UCARA003000	UL-CC	CORNER CABINET 27.5" x 27.5"
UCARA003001	UL-CC-OS	CORNER CABINET 27.5" x 36.5" OS
UCARA003002	UL-CC-BP	CORNER CABINET BACK PANEL
UCARA004000	UL-ECK	END CLAD KIT 27.5"
UCARA004001	UL-ECK-0S	END CLAD KIT 36.5" OS
UCARA005000	UL-BS	BACKSPLASH-GRILL/BASE UNIT 641/2"
UCARA005001	UL-BS-CC	BACKSPLASH CORNER CABINET
UCARA005002	UL-BS-CC-OS	BACKSPLASH CORNER CABINET OS
UCARA006000	UL-DD	STAINLESS DOUBLE ACCESS DOORS 27"
UCARA007000	UL-PU	PILLAR UNIT (183/8" x 183/8")
RS-UCARA001002	UL-GC-36	UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL)
RS-UCARA002001	UL-BC-36	BASE CABINET (FITS FIRE TABLE OR FRIDGE)
RS-UCARA003004	UL-CC-OS-36	CRNR CABINET 27.5X36.5 OS
RS-UCARA003005	UL-CC-36	CORNER CABINET 27.5X27.5
RS-UCARA004002	UL-ECK-36	END CLAD KIT 27.5"
RS-UCARA004003	UL-ECK-0S-36	END CLAD KIT 36.5" OS





Download the U-Cara Modular Fireplace Installation Guide.

# U-Cara® Wall Mount System




The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR RS-UCARA000002 39" LENGTH - SOLD IN PACKS OF 10 PIECES



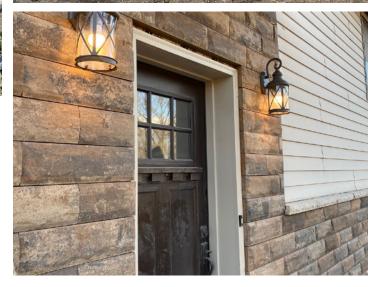

# Architectural Coping & Pillar Cap





### **APPLICATIONS**













### **APPEARANCE**

Edge Detail - Rounded Surface Texture - Exposed Joint Spacing - n/a

### **TECHNOLOGIES**

### ENDURACOLOR™

Refined surface and long-lasting color

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		COPING	PILLAR CAP 28"
	Bundle Type	SINGLE	SINGLE
	Plant Produced		
	Thickness (mm)	60 MM	76 MM
SQFT PER	Bundle	-	=
JULITER	Unit	-	-
	Bundle	-	-
FCFT PER	Layer	-	-
	Unit	-	-
LNFT PER	Bundle	42.00	-
	Unit	2.00	-
		0	
UNITS PER	Bundle	21.00	6.00
SqFt		-	-
	Unit	68	183
LBS PER	Bundle	1,428	1,098

COLORS	Reflectance	Stock	Stock
Buff	SR n/a SRI n/a	✓	✓
Charcoal	SR n/a SRI n/a	✓	✓





CONTRACTORS

COMMERCIAL



**COPING**609 x 60mm x 355mm
24 x 2 <sup>3</sup>/<sub>6</sub> x 14"
21 units/Bundle



**PILLAR CAP**711 x 76mm x 711mm
28 x 3 x 28"

Note: this unit is tapered at the top

Notes: **SOLD IN FULL PALLETS ONLY** and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

Single Unit



### **APPLICATIONS**













### **APPEARANCE**

Edge Detail - Zero Surface Texture - Weathered Joint Spacing - 2mm

### **TECHNOLOGIES**

### CLASSIC™

Budget-friendly traditional product mix

### ANTIQUED™

Distressed, timeworn finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

	Bundle	-
FCFT PER	Layer	-
	Stone	-

PER BUNDLE	Layers	10.00
PER BUNDLE	Sections	4.00

LNFT PER	Bundle	130.00
LNFIFER	Unit	0.50

	SqFt	-
UNITS PER	Section	65.00
	Bundle	260.00

	Layer	316
LBS PER	Section	790
	Bundle	3,160

COLORS	Reflectance	Stock
Midnight Charcoal	SR12 SRI 9	/
Sandstone	SR41 SRI 46	/
Sierra	SR. n/a SRI n/a	/



CONTRACTORS

75



BRUSSELS FULLNOSE 152.4 x 304.8 x 60mm 6 x 12 x 2 3/8" 260 units/Bundle

Notes: Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

6 x 12 Fullnose CLASSIC



### **APPLICATIONS**













### **APPEARANCE**

Edge Detail - Zero Surface Texture - Smooth Joint Spacing - 2mm

### **TECHNOLOGIES**

### CLASSIC™

Budget-friendly traditional product mix

### **TECHNICAL INFORMATION**

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

	6 x 12
Bundle Type	SINGLE
Plant Produced	CHICAGO
Thickness (mm)	60 MM

	Bundle	-
FCFT PER	Layer	-
	Stone	-

PER BUNDLE	Layers	4.00
PER BUNDLE	Sections	-

LNFT PER	Bundle	104.00
LNFIFER	Unit	0.50

	SqFt	-
UNITS PER	Section	-
	Bundle	208.00

	Layer	698
LBS PER	Section	-
	Bundle	2,791

COLORS	Reflectance	Stock
Midnight Charcoal	SR. n/a SRI n/a	/
Sandstone	SR. n/a SRI n/a	/
Sierra	SR. n/a SRI n/a	/



CONTRACTORS



6 X 12 FULLNOSE 150 x 300 x 60mm 5 % x 11 % x 2 3/6" 208 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Single Unit

# **Ledgestone**<sup>™</sup> Fullnose, Coping & Closed-End Coping



#### **APPLICATIONS**













### **APPEARANCE**

Edge Detail - n/a Surface Texture - Textured

### **TECHNOLOGIES**

### REALA™

Cast from natural stone

### **TECHNICAL INFORMATION**

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		FULLNOSE COPING	STANDARD COPING	STANDARD CLOSED-END	LARGE COPING	LARGE CLOSED-END
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
	Plant Produced	CHICAGO	CHICAGO	CHICAGO	CHICAGO	CHICAGO
	Thickness (mm)	60 MM	70 MM	70 MM	70 MM	70 MM
	Bundle	5.12	5.52	5.52	6.87	6.87
FCFT PER	Layer	0.39	1.38	1.38	1.72	1.72
	Stone	0.39	0.46	0.46	0.57	0.57
PER	Layers	13.00	4.00	4.00	4.00	4.00
BUNDLE	Sections	-	-	-	-	-
LNFT	Bundle	26.00	24.00	24.00	30.00	30.00
PER	Unit	2.00	2.00	2.00	2.50	2.50
	SqFt	2.54	2.18	2.18	1.75	1.75
UNITS PER	Section	-	-	-	-	-
	Bundle	13.00	12.00	12.00	12.00	12.00
	T .					
LBS	Layer	56	193	199	282	279
PER	Section	-	-	-	-	-
	Bundle	723	772	796	1,128	1,116

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock
Buff	n/a	1	1	✓	✓	1
Grey	n/a	/	/	✓	/	/





CONTRACTORS

COMMERCIAL



**FULLNOSE COPING** 610 x 305 x 60mm  $24 \times 12 \times 2 \, ^{3}\!/\!\! s"$ 13 units/Bundle .39 Fc.Ft./Stone

Single Units



STANDARD COPING 610 x 305 x 70mm 24 x 12 x 2 ¾" 12 units/Bundle .46 Fc.Ft./Stone



STANDARD CLOSED-END **COPING** 610 x 305 x 70mm 24 x 12 x 2 3/4" 12 units/Bundle .46 Fc.Ft./Stone



**LARGE COPING** 762 x 343 x 70mm  $30 \times 13 \, 1/_{\! 2} \times 2 \, 3/_{\! 4}"$ 12 units/Bundle .57 Fc.Ft./Stone



LARGE CLOSED-END **COPING** 762 x 343 x 70mm 30 x 13 ½ x 2 ¾" 12 units/Bundle .57 Fc.Ft./Stone

**UNILOCK** 

77

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

# **Ledgestone**<sup>™</sup> Pillar Caps, Steps & Fire Pit Coping



### **APPLICATIONS**









### **APPEARANCE**

Edge Detail - n/a Surface Texture - Textured

### **TECHNOLOGIES**

### REALA™

Cast from natural stone

### **TECHNICAL INFORMATION**

Conforms to ASTM C 1776 Eligible for LEED v4.1 credits

		30" STEP TREAD	48" STEP	72" STEP	24" PILLAR CAP	29" PILLAR CAP	21 1/2" FIRE PIT COPING
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE
Р	lant Produced	CHICAGO	MULTI-PLANT	MULTI-PLANT	CHICAGO	CHICAGO	CHICAGO
Th	nickness (mm)	70 MM	150 MM	150 MM	100 MM	100 MM	65 MM
				· · · · · · · · · · · · · · · · · · ·			
	Bundle	6.87	5.91	8.86	3.28	-	-
FCFT PER	Layer	1.72	1.97	2.95	0.66	-	-
	Stone	0.57	1.97	2.95	0.66	-	-
	I			I			
PER	Layers	4.00	3.00	3.00	5.00	5.00	6.00
BUNDLE	Sections	-	-	-	-	-	-
	Bundle	30.00	12.00	18.00	10.04	_	-
LNFT PER	Unit	2.50	4.00	6.00	2.01	-	-
	SqFt	1.75	0.51	0.34	1.52	-	-
UNITS PER	Section	-	-	-	-	-	-
	Bundle	12.00	3.00	3.00	5.00	5.00	24.00
	1.	_	_				
	Layer	262	556	813	159	206	338
LBS PER	Section	-	-	-	-	-	-
	Bundle	1,049	1,669	2,439	795	1,030	1,688

COLORS	Reflectance	Stock	Stock	Stock	Stock	Stock	Stock
Buff	n/a	1	1	1	1	✓	✓
Grey	n/a	✓	1	/	<b>✓</b>	✓	/





CONTRACTORS

COMMERCIAL

Single Unit



FIRE PIT COPING 254 x 546 x 65mm 10 x 21 ½ x 2 5/6" 24 units/Bundle



**30" STEP TREAD** 762 x 343 x 70mm 30 x 13 x 2 ¾" 12 units/Bundle .57 Fc.Ft./Stone



48" STEP 1220 x 610 x 150mm 48 x 24 x 5 %" 3 units/Bundle 1.97 Fc.Ft./Stone



**72" STEP**1830 x 610 x 150mm
72 x 24 x 5 % 3 units/Bundle
2.95 Fc.Ft./Stone



24" PILLAR CAP 610 x 610 x 100mm 24 x 24 x 3 %" 5 units/Bundle .66 Fc.Ft./Stone



29" PILLAR CAP 740 x 740 x 100mm 29 1/8 x 29 1/8 x 3 1/8" 5 units/Bundle .66 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping and steps are rock faced on three sides. All measurements are nominal. Contact Unilock for more information.

Single Units

# Umbriano<sup>®</sup> Coping





### **APPLICATIONS**













### APPEARANCE

Edge Detail - Chamfered or Rounded Surface Texture - Umbriano Mottled Joint Spacing - 3mm

### **TECHNOLOGIES**

### $\textbf{ENDURACOLOR}^{\text{\tiny{TM}}}$

Refined surface and long-lasting color

### EASYCLEAN™

Factory sealed to provide integral stain resistance

### COLORFUSION™

Subtly mottled colored finish

### TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits

		COPING CHAMFERED	COPING FULLNOSE
	Bundle Type	SINGLE	SINGLE
	Plant Produced	MULTI-PLANT	MULTI-PLANT
	Thickness (mm)	60 MM	60 MM
	Bundle	-	-
FCFT PER	Layer	-	-
	Stone	-	-
PER BUNDLE	Layers	10.00	10.00
T EN BONDEE	Sections	-	-
		4.0-	4.07
LNFT PER	Unit	1.97	1.97
	Bundle	78.74	78.74
	SqFt	_	-
UNITS PER	Section	-	-
	Bundle	40.00	40.00
	Layer	252	252
LBS PER	Section	-	-
	Bundle	2,517	2,517

COLORS	Reflectance	Stock	Stock
French Grey	SR17 SRI 15	/	<b>✓</b>
Midnight Sky	SR17 SRI 15	/	<b>✓</b>
Summer Wheat	SR42 SRI 48	/	/
Winter Marvel	SR17 SRI 15	/	✓



CONTRACTORS



**COPING CHAMFERED** 360 x 600 x 600mm 14 x 24 x 2 3%" 40 units/Bundle



### COPING FULLNOSE

360 x 600 x 60mm 14 x 24 x 2 3/8" 40 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using Unilock Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics.

Single Unit



### **APPLICATIONS**









### APPEARANCE

Edge Detail - n/a

Surface Texture - Standard / Smooth

### **TECHNOLOGIES**

CLASSIC™

Budget-friendly traditional product mix

### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

	Bundle Type	SINGLE
ı	Plant Produced	CHICAGO
Т	hickness (mm)	55 MM

	Bundle	-
FCFT PER	Layer	-
	Stone	-

PER BUNDLE	Layers	9.00
PER DUNDLE	Sections	-

LNFT PER	Bundle	85.50
LNFIPER	Unit	1.58

	SqFt	-
UNITS PER	Section	-
	Bundle	54.00

	Layer	280
LBS PER	Section	-
	Bundle	2,524

COLORS	Reflectance	Stock	
Natural	SR.n/a SRI n/a	/	





CONTRACTORS

COMMERCIAL

Single Units





### **APPLICATIONS**



### **APPEARANCE**

Edge Detail - Zero Surface Texture - Standard Joint Spacing - n/a Void % - n/a

### **TECHNOLOGIES**

### CLASSIC™

Budget-friendly traditional product mix

### ANTIQUED™

Distressed, timeworn finish

### **TECHNICAL INFORMATION**

Conforms to ASTM C 1372 Eligible for LEED v4.1 credits

		SQUARE W/GRILL	SQUARE UNIT	ROUND W/GRILL	ROUND UNIT
	Bundle Type	SINGLE	SINGLE	SINGLE	SINGLE
	Thickness (mm)	300 MM	300 MM	300 MM	300 MM
	Outside	56.00	56.00	52.00	52.00
DIAMETER (inch)	Inside	40.00	40.00	36.00	36.00
(IIICII)	Insert	38.00	38.00	34.00	34.00
LAYER PER UNIT		3.00	3.00	3.00	3.00
UNIT PER LAY	ER	16.00	16.00	18.00	18.00
UNIT PER PALLET		48.00	48.00	54.00	54.00
LBS PER PALLET		1,545	1,525	1,145	1,125

COLORS	Reflectance	Stock	Stock	Stock	Stock
Granite	SR. n/a SRI n/a	-	-	1	/
Sandstone	SR. n/a SRI n/a	1	1	1	<b>/</b>
Sierra	SR n/a SRI n/a	✓	✓	✓	<b>✓</b>

SUNSET FIRE PIT KIT	Square	Round
Granite	-	RS-CON082
Granite w/Grill	-	RS-CON083
Sandstone	RS-CON037	RS-CON031
Sandstone w/ Grill	RS-CON040	RS-CON034
Sierra	RS-CON036	RS-CON030
Sierra w/ Grill	RS-CON039	RS-CON033



CONTRACTORS

COMMERCIAL





**SUNSET ROUND W/GRILL** 1300 x 1300 x 300mm 51 ½ x 51 ½ x 11 1/8"



**SUNSET SQUARE W/GRILL** 1400 x 1400 x 300mm 55 x 55 x 11 %"



SUNSET ROUND UNIT 1300 x 1300 x 300mm 51 ½ x 51 ½ x 11 %"



**SUNSET SQUARE UNIT** 1400 x 1400 x 300mm 55 x 55 x 11 7/8"

## **Unilock Elements**

# **Tuscany Collection**



TUSCANY FIREPLACE
Sandstone with Copthorne® (3 Color Blend)

### **ELEMENT PRODUCT CODES**

Tuscany Collection	Sandstone	Sierra
Fireplace Top	RS-ELE074-1	RS-ELE095-2
Fireplace Bottom	RS-ELE088-1	RS-ELE096-2
Wood box Set	RS-ELE028-1	RS-ELE027-1
Arched Hearth	RS-ELE016-1	RS-ELE017-1



TUSCANY FIREPLACE
Sierra with Copthorne® (3 Color Blend)

### WEIGHTS

### **Tuscany Collection**

Fireplace Top — 2925 lbs Fireplace Bottom — 4225 lbs Wood Boxes — 4005 lbs Arched Hearth — 1170 lbs

### **Barcelona Collection**



BARCELONA FIREPLACE Sierra with Umbriano® (Summer Wheat)

### **ELEMENT PRODUCT CODES**

### **Barcelona Collection**

Sierra
Fireplace RS-ELE214
Wood box Set RS-ELE213
Arched Hearth RS-ELE212


### WEIGHTS:

Barcelona Collection


Fireplace Top — 2725 lbs Fireplace Bottom — 4170 lbs Wood Boxes — 4200 lbs Arched Hearth — 1200 lbs

### **Unilock Elements**

### TYPICAL CROSS SECTION FOR CONCRETE PAD INSTALLATION

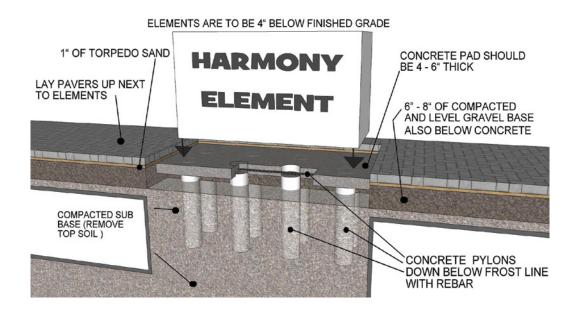

### **TUSCANY & BARCELONA FIREPLACE**

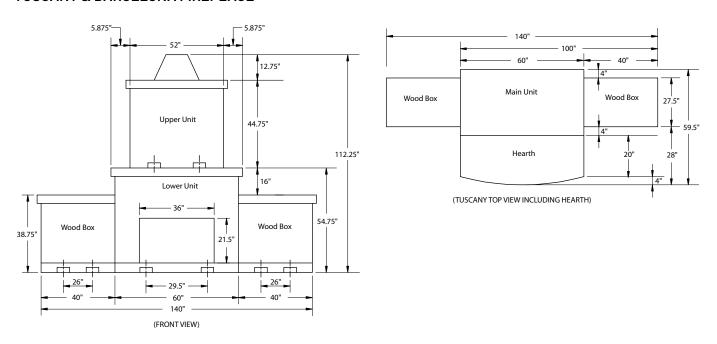

### **GUARANTEE**

The standard Unilock guarantee applies to the units used to construct Unilock Elements. (See Unilock literature for details.) Third party grills and fireboxes carry their respective manufacturer's warranty, and may change without notice.

**Note:** Unilock reserves the right to change model designs, accessories and colors without notice. Unilock will not be responsible for improper use or handling that results in property damage. Some models may not be exactly as shown. Fireplaces come complete with UL-approved stainless steel fireboxes. Check local building codes and regulations prior to ordering and installing Unilock Elements.

## **Cleaning Products**



### PROFESSIONAL GRADE OIL & GREASE REMOVER

RS-CLN001 1 quart; 6/case; 100 cases/skid (600 ea)

- · Removes penetrated petroleum-based stains.
- · Clean-dries from a liquid to a powder.



### PAINT, TAR & RUBBER REMOVER

RS-CLN007 1 quart; 6/case; 120 cases/skid (720 ea)

- · Effectively dissolves paint, tar, rubber or chewing gum.
- · Water-rinsable stones, concrete, and masonry.



### PAVER RESTORER

RS-CLN044 1 gallon; 4/case; 36 cases/skid (144 ea)

- Eco-friendly cleaner removes slurry and polymeric haze.
- · Cleans up to 200 sq. ft./gallon.



#### SUREBOND SURECLEAN

RS-CLN014 1 Gallon; 4/case; 36 cases/skid (27 cases/truckload - HAZMAT) RS-CLN063 5 Gallon (SPECIAL ORDER) 36 ea./skid (25 ea./truckload - HAZMAT)

- Environmentally friendly, non-acid, super concentrated cleaner.
- · Dislodges dirt, grime, tire scuffing and environmental soiling.
- · Cleans up to 250 sq. ft./gallon.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



### SUREBOND EFFLO OFF

RS-CLN0621 gallon; 4/case; 36 cases/skid (27 cases/truckload - HAZMAT) RS-CLN067 5 gallons (SPECIAL ORDER) (25 ea/truckload - HAZMAT)

- · Heavy-duty, non-acid concentrated cleaner.
- · Designed for the removal of efflorescence, mineral and salt deposits.
- · Cleans up to 200 sq. ft./gallon.
- 1,000 lbs. HAZMAT weight restriction applies with this



### SUREBOND STAIN & RUST BUSTER

RS-CLN065 1 quart; 12/case; 36 cases/skid (432 ea)

- Concentrated, evnironmentally friendly spot cleaner.
- · Cleans stains such as moss, mildew, leaf, rust and nongreasy food stains.
- S.R.B. is concentrated; requires dilution prior to use.



### SUREBOND SURE STRIP

RS-CLN031 1 gallon; 4/case; 36 cases/skid (144 ea) RS-CLN032 5 gallons; 36/skid (SPECIAL ORDER)

- · Strips away a variety of sealers and coatings.
- · Fast-acting, works in minutes.
- · Ready to use, no dilution needed.
- Coverage is about 250 Sq. Ft./gallon.

### Adhesive Products



#### SUREBOND SB-10 ADHESIVE

RS-ADH009-1 10 oz; 12/case; 140 cases/skid (1680 ea) RS-ADH015-1 28 oz; 12/case; 60 cases/skid (720 ea)

- · Fast set-up, quick curing.
- Can be applied to wet, damp & frozen block.
- Temeratures ranging from 0 100°F.



### SUREBOND SB-15 ADHESIVE

\* SPECIAL ORDER - FULL CASES ONLY \*

RS-ADH050 10 oz tube: 12/case: 140 cases/skid RS-ADH051 28 oz tube; 12/case; 60 cases/skid

- Rapid set, 70% faster set time.
- · Superior durability including heavy vehicular traffic.
- Temeratures ranging from 10 100°F.
- 1200 psi.



### ALLIANCE XP GATOR BLOCK ADHESIVE

RS-ADH039 10 oz; 12/case; 90 cases/skid (1080 ea) RS-ADH040 28 oz; 12/case; 60 cases/skid (720 ea)

- · Bonds permanently in 24 hours.
- Material may be repositioned for up to 30 minutes.
- Works in termperatures above 32°F.
- 850 psi in 24 hrs (1000 psi in 7 days.



### TECHNISEAL STRUCTURE BOND™ FOAM **ADHESIVE**

RS-ADH048 24 oz; 12/case; 84 cases/skid (1008 ea)

- · Super-strength foam adhesive.
- Most items are bonded in just 8 minutes.
- Works best in temperatures between 0-120°F.
- Yields up to 600 In.ft. with a 3/8" bead.



### TECHNISEAL STRUCTURE BOND™ GUN II

RS-T00L378 1 dispenser gun; 12/case

- Perfect for hard-to-reach applications.
- · Limits excessive spillage or dripping.
- Reusable: Easy clean-up using Gun Cleaner.



### TECHNISEAL STRUCTURE BOND™ GUN **CLEANER**

RS-CLN093 24 oz/canister; 12 canisters/case

· Rapidly dissolves any uncured Structure Bond adhesive residue.



### **TECHNISEAL STICKY STONE**

RS-ADH055 20.3 oz sausage; 15 sausages/case;


- · Professional-grade vertical hardscape adhesive.
- Perfect for outdoor kitchens, fire pits & columns, etc.
- Holds up to 15 lbs.
- Coverage: 1/4" x 1/4" deep area, each sausage will cover 50 linft.
- Recommended to place 1/2" bead every 3".
- · Applies mess-free and easily with gun applicator.



#### STICKY STONE GUN

RS-T00L557 1 dispenser gun kit; 10 kits/case

- Heavy-duty dispenser gun specially designed for Stickystone.
- Each gun kit includes: 6 nozzles, 2 extra pistons & steel hook pull.



## **Sealing Products**



### **BACK TO BLACK SEALER**

RS-SEAL238 1 quart; 3 quarts/case

- Quickly revives and enhances faded, dark limestone.
- Provides stain & water-resistant surface.
- 1 Liter covers up to 400 sqft with one coat depending on surface porosity.
- LIMITED STOCK AVAILABLE



# SUREBOND 8700 WET LOOK JOINT SAND STABILIZER WITH FUNGICIDE

RS-SEAL151 1 gallon; 4/case; 36 cases/skid (27 cases) RS-SEAL152 5 gallons; 36 ea/skid (22 ea.) RS-SEAL176 55 gallons; 4 drums/skid | SPECIAL ORDER (1-55 Gal Drum - HAZMAT Limit per TL)

- Seals & enhances surface while hardening jointing sand.
- Deeply enhances surface with stain-resistant semi-gloss finish.
- Formulated with antifungal to stop growth of mold, fungi and moss.
- Rain safe in 90 minutes; approx. coverage 80-120 sq.ft.
- 1,000 lbs. HAZMAT weight restriction applies with this product.



#### SUREBOND 4000 INVISIBLE PENETRATING

RS-SEAL 0331 gallon | RS-SEAL 0345 gallon

- · Surface Penetrating
- Long Lasting & Durable
- · Water repelant and salt blocker
- · Non-Hazardous and VOC/EPA Compliant



### SUREBOND 1300 JOINT SAND STABILIZING SEALER

RS-SEAL037-2 1 gallon; 4/case; 36 cases/skid (144 ea) RS-SEAL036 5 gallon; 36 ea./skid

RS-SEAL038 55 gallons; 4 drums/skid (SPECIAL ORDER)

- Stabilizes joints, reduces sand washout, weeds & insects.
- Locks in with a clean, natural look & matte finish.
- Formulated with antifungal to protect film from mold, moss & algae.
- Approximate coverage 80 120 sq.ft.



# TECHNISEAL® WL4 PROSERIES WET LOOK WATER REPELLANT

RS-SEAL001 1 gallon; 4/case; 45 cases/skid; (22 cases/truckload - HAZMAT) RS-SEAL073 5 gallons; 48 ea/skid;

- Solvent-based sealer to enhance pavers with wet-look, high-gloss finish.
- Reduces oil & dirt penetration, makes cleaning easier.
- Approximate coverage is 150 sq.ft./gallon (750 sq.ft./5 gallons).
- 1,000 lbs HAZMAT weight restrictions applies with this product.





### **SEK JOINTING SAND**

RS-SAND001-1 - Tan | RS-SAND140 - Grey | RS-SAND186 - Black | RS-SAND148 - Platinum 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Recommended for joints up to 3/4".
- Angular jointing sand, washed, screened & kiln-dried.
- Coverage: 50=75 Sq. Ft./bag with standard 1/4" joints.

### Sand Products continued



#### SEK POLYSWEEP SAND

RS-SAND045 - Tan | RS-SAND046 - Grey | RS-SAND184 - Black | RS-SAND147 - Platinum | RS-SAND232 - Pearl 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Recommended for joints up to 3/4".
- Haze Free Guaranteed Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.



### SEK POLYSWEEP SAND X-TREME WIDE JOINT

RS-SAND111 - Tan | RS-SAND117 - Grey; RS-SAND185 - Black | RS-SAND149 - Platinum 50 lb/bag • 56 bags/skid (2860 lbs/skid)

- Formulated for joints 1/8" up to 4".
- Haze Free Guaranteed Advanced Clear Set Technology.
- Coverage 50-75 Sq.Ft./bag with standard 1/4" joints.



### **TECHNISEAL SMARTSAND**

RS-SAND168 - Prairie Grey | RS-SAND169 - Prairie Tan 50 lb/bag • 56 bags/skid (2860 lbs/skid) Approx. 100-150sq.ft/gallon coverage

- Haze -free, fast-setting polymeric sand.
- Recommended for joints from 1/16" up to 1".
- Minimum Joint Depth is 1.5".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



#### TECHNISEAL HP NEXTGEL

RS-SAND130 - Prairie Grey  $\mid$  RS-SAND131 - Prairie Tan 50 lb/bag  $\, \cdot \, 56 \,$  bags/skid (2860 lbs/skid)

- Dust & haze-free, fast-setting polymeric sand.
- Formulated for heavy-sloped, heavy traffic, high humidity and pool decks.
- For joints from 1/16" to 4", ideal for joints up to 1".
- Coverage: 60-120 Sq.Ft./bag for narrow joints.



### ALLIANCE GATOR SUPER SAND

RS-SAND078 - Beige | RS-SAND080 - Slate Grey 50lb bag / 56 bags per skid

- Advanced haze-free polymeric sand.
- Formulated for pavers, slabs & wet cast pavers up to 1".
- Rain safe 1 hour after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".



### **ALLIANCE SUPER SAND G2**

RS-SAND156 - Beige | RS-SAND157 - Slate Grey 50 lb/bag 56 bags/skid

- Intelligent polymeric sand to neutralize haze and dust.
- Formulated for joints up to 4" for traditional and up to 2" for overlay applications.
- Rapid Set Technology Rain safe 16 minutes after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".



### **ALLIANCE MAXX G2**

RS-SAND158 - Beige | RS-SAND159 - Slate Grey | RS-SAND160 - Black Diamond | RS-SAND161 - Ivory Packaging: •50 lb/bag •56 bags/skid

- Intelligent polymeric sand to neutralize haze and dust.
- Formulated for joints up to 4" for traditional applications & up to 2" for overlay applications.
- Rapid Set Technology Rain safe 16minutes after water activation.
- Coverage: 65-85 Sq.Ft./bag with joints 1/8" to 3/8".

### Sand Products continued



### **ALLIANCE EUROSTONE**

RS-SAND095 - Slate Grey

- Polymeric sand designed for drainage and non-drainage base systems.
- Formulated for joints up to 1.5".
- Works above 32ºF.
- Coverage 65-85 Sq.Ft./bag with joints 1/8" to 3/8\*.



### ALLIANCE GATOR DUST

RS-SAND072 - Beige | RS-SAND073 - Grey 50 lb/bag • 56 bags/skid

- Polymeric stone dust.
- Formulated for joints from 1/2" to 6".
- · Ideal with Gator Base application.
- Coverage: 20-39 Sq.Ft./bag with joints 1" to 2".



### **ALLIANCE GATOR NITRO SAND**

RS-SAND196 - Beige | SAND197 - Grey | SAND198 - Black SAND236 - Silver (LSA)

40 lb bucket • 48 buckets/skid

- Ready to use permeable jointing material.
- · Can be installed in wet or dry weather.
- Formulated for joints from 1/2" to 2".
- Ideal for concrete & wetcast pavers, Natural Stone & Porcelain Tile.
- Coverage: 10-84 Sq.Ft./bucket depending on joint width.

## Permeable Chip Products



### ALLIANCE GATOR AQUA ROCK

RS-AGG032 - 50lb./bag • 56 bags/skid RS-AGG033 2200 lb./Super Sack

- Meets ASTM No. 9 requirement for permeable joint units.
- High-strength granite ideal for bedding course
   gointing material.
- Coverage: 20-25 Sq.Ft./bag | 880-1100 Sq.Ft./ Super Sack.



### **SEK PERM CHIPS**

50lb./bag • 56 bags/skid


RS-AGG035 - Eclipse Black | RS-AGG040 - Stormy Grey RS-AGG037 - Saturn Tan (SPECIAL ORDER/FULL SKID ONLY)

### 2500 lb Super Sack:

RS-AGG036 - Eclipse Black | RS-AGG039 - Saturn Tan RS-AGG041 - Stormy Grey

- High-strength crushed and washed granite meets ASTM No. 9 Stone Specifications for permeable joint filler
- Ideal for permeable paving stone installations, both as a bedding course and as a joint filler
- Coverage: 30-35Sq.Ft./bag | 1500-1750 Sq.Ft./Super Sack

### Geotextile & Fabric Products




### STRATAGRID - SGU60

RS-FAB101

- · Geogrid reinforcement for soil and aggregates
- Engineered to be mechanically & chemically durable in harsh construction and agressive soil environments
- Roll Dimensions: 6.25' wide x 288' length (200 Square Yards)
- 85 lbs/roll

### Geotextiles and Fabric Products



### UNILOCK DRIVEGRID™ SYSTEM

RS-FAB075

- 120' x 12.5' Roll 1,500 Sq. Ft.
- 56 lbs per roll.
- · Sold in full rolls only.



### **GEOTEXTILE FABRIC**

RS-FAB001

- 6 oz. Non-woven multipurpose geotextile fabric.
- Sold in full roll quantities only.
- Roll Dimensions: 15' wide x 300' length (4500 Sq.Ft.)
- 225 lbs/roll.



#### ALLIANCE GATOR GRID 30-30

RS-FAB070 - 4x50'; 15 rolls/case; 4 cases (60 rolls/skid) (FULL CASES ONLY)

RS-FAB072 - 6'x150'; 30 rolls/skid

- Biaxial geogrid, with high molecular weight weight and hightenacity poolyester yarns
- High-tenacity polyester yarns woven in tension and finished with PVC cotaing



### **GATOR FABRIC GF4.4**

RS-FAB044 - 4'x100'; 6 rolls/case; 4 cases (24 rolls)/skid (FULL CASES ONLY)

RS-FAB047 - 6'x300; 16 rolls/skid

- Needle punched non-woven geotextile made of polypropylene fibers
- Non-biodegradable and resistant to most soil chemicals.

### Miscellaneous Items



### **WALL DRAIN PRO**


 $RS-ACC086 - Black \mid RS-ACC123 - Grey \mid RS-ACC122 - Tan \\ 12 units/case; 63 cases/skid (full cases only)$ 


- Simpler, aesthetically pleasing improved water drainage product
- Drain height can be easily modified to use with any block height under 8"



### X & T SLAB SPACERS

RS-ACC237 - X Spacers; 2" x 2"; 250 pcs./bag RS-ACC236 - T Spacers; 2" x 1"; 250pcs./bag






X & T bagged separately



### **Gator Base System**



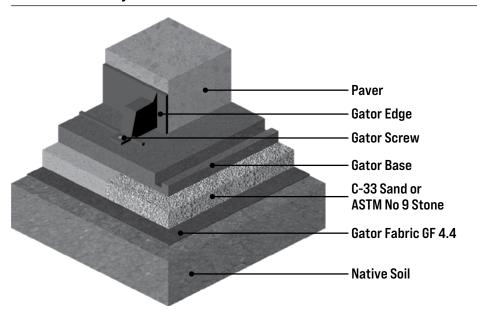

# STEP 1 • EXCAVATION FOR THE GATOR BASE INSTALLATION

The total depth required will be determined by adding the thickness of the sand or chip setting bed (3/4" [19 mm]), GATOR BASE (3/4" [19 mm]), and thickness of the paver, slab, stone, or porcelain tile. Excavation depth is approximately 4" for a 2 3/8" [60 mm] concrete paver. Excavate 6" (15 cm) wider than the perimeter of the paved surface or 12" wider (30 cm) when building a seating wall or fire pit.

### STEP 2 • LEVELING AND COMPACTING OF THE SOIL

The bottom of the excavated area should be uniform and smooth (+/- 3/8" [10 mm] in 10') and slope in the same direction as the finished paver surface Compact the soil using a vibrating plate or hand tamper in confined areas.

# STEP 3 • ADD GATOR FABRIC GF4.4 AND INSTALL SETTING BED

Cover the bottom and sides of the excavated area with Gator Fabric GF4.4. Spread an even layer of sand (ASTM C33 Concrete Sand) or chip (ASTM No. 9 Stone) in a 3/4" [19 mm] thick layer over the Gator Fabric GF4.4. No compaction is needed for the chip stone. However, the sand-setting bed should be compacted using a hand tamper or vibrating plate. It will help to moisten the sand before compaction. The surface should be smooth, the finished paver surface will mirror the grade set in this step.

### STEP 4 • INSTALL THE GATOR BASE


Cover the area with the GATOR BASE panels, 6" (15 cm) wider than the finished paver edge or 12" (30 cm) for a seating wall or fire pit. Lay the GATOR BASE units in an alternating (staggered) pattern - if the Gator Faces line up, the interlocking edges will align perfectly. Gator Base can easily be cut to size using a utility knife.

### STEP 5 • INSTALL PAVERS, BLOCKS and gator edge

Place the pavers or blocks directly on the GATOR BASE. Adding a 1/2" (13 mm) of bedding sand onto the surface of the GATOR BASE is also an accepted method for non-uniform thickness stone. Install the Gator Edge on the GATOR BASE, firmly against the pavers or blocks. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Edge.

STEP 6 • APPLY GATOR MAXX G2 TO PAVER JOINTS

## **Gator Tile System**

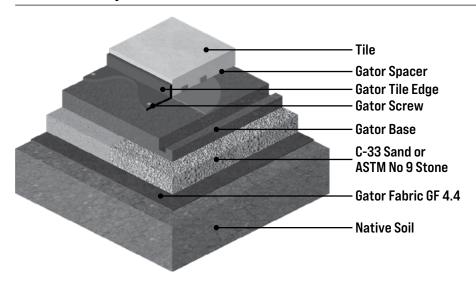

### **FOLLOW STEPS 1 TO 4 OF GATOR BASE SYSTEM**

# STEP 5 • INSTALL GATOR SPACER, GATOR XP GLUE AND TILE

The installation of porcelain tile directly on top of the Gator Base using the GATOR SPACER to provide uniform spacing and unparalleled stability. The GATOR SPACER has been designed to provide the right support, load transfer and a monolithic surface binding all units together with the help of the Gator XP Glue on every quadrants of the Gator Spacer.

### STEP 6 • INSTALL GATOR TILE EDGE

Install the Gator Tile Edge on the GATOR BASE, firmly against the tiles. Use a Gator Base Screw every second edging hole to maximize the lateral support provided by the Gator Tile Edge.

### STEP 7 • APPLY GATOR NITRO TO TILE JOINTS





## **Edging Products**

#### SEK SNAPEDGE

RS-EDGE001 - 8' (96") piece; 24 pcs./bundle; 28 bundles (672 pcs)/skid RS-EDGE017 - Low Profile;6' 8" (80") piece; 24 pcs./bundle; 28 bundles (672 pcs.)/skid

- One—piece edging system that handles both straight & curved installations.
- · Unique and quick snip 'n flex feature.
- Open base design allows root and grass system to grow through.
- Standard Sidewall: 1 %" | Low Profile Sidewall: 1 3/8
- Skid Dimensions: 98"L x 48"W x 50"H 210 lbs./skid

#### RS-EDGE001



### Low Profile - RS-EDGE017





#### SPIKES

RS-EDGE014 - 10" Round Spike; About 150 spikes/case; 48 cases/skid

- · Premium heavy-duty landscape metal spike.
- · SOLD IN FULL CASES ONLY.
- 51 lbs./case; 2,448 lbs./skid



### SEK PERMEDGE

RS-EDGE033 - 8' (96") piece; 64 pcs./skid

- Permeable, spikeless edge restraint that includes attached geogrid.
- One-piece edging system that handles both straight and curved installations.
- Approximate Coverage: 25-30 Ln.Ft./ bucket



### PERMAEDGE PAVER EDGING

RS-EDGE074 - 5 Gallon bucket; 77 lb./bucket

- Quick & easy to use cuts install time by 75%.
- The perfect combination of strength, flexibility and permeability.
- Mix 1 gallon of water to each 5 gallon bucket of PermaEdge.
- · Approximate Coverage: 25-30 Ln.Ft./bucket



### PERMAEDGE PAVER EDGING

RS-EDGE081 - 50 lb. bag; 56 Bags/Pallet

- Quick & easy to use cuts install time by 75%.
- The perfect combination of strength, flexibility and permeability.
- Mix 2/3 gallon of water per bag.
- Approximate Coverage: 16' 18' Ln.Ft. on Dense Base, 12' - 16' Lin. Ft on Open Graded Base.



### **SEK EDGECRETE**

RS-EDGE075 - 50lb bag; 56 bags/skid

- · Paver restraint in a a bag Just Add Water.
- Fiber-reinforced concrete edge restraint.
- Simple to install No spikes needed.
- Approximate coverage: Std. Base 17 Ln.Ft./bag; Permeable & Open Base- 13 Ln.Ft./bag

### Edging Products continued

### ALLIANCE GATOR EDGE RIGID

RS-EDGE055 8' piece; 24 pcs/bundle 28 bundles/pallet (672 pcs/pallet)

- Gator Edge Products are easy to use and quick to install. Offers great lateral support and makes definition easier for alleys, driveways or sidewalks.
- They are made with 100% polypropylene or polyethylene for strength and flexibility.
- Rigid Edging can be transformed to Flex with a simple cut.



### **ALLIANCE GATOR XTREME EDGE**

RS-EDGE076 50 lb bag / 56 bags per skid.

- · The ultimate fiber-reinforced structural edging solution for any hardscape project.
- · Can be used for any traditional, open-graded, permeable, Gator Base or overlay application using concrete pavers or slabs, natural and wet cast
- · Offers permanent continuous lateral support.
- · Approximate Coverage: 20-25 sqft. per bag.

## Stainless Steel Fireplace Insert

#### STAINLESS STEEL FIREPLACE INSERT

36" Unit - RS-FIR033; Order with RS-FIR041 (18" Flue Pipe), RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

42" Unit - FS-FIR034; (LIMITED AVAILABILITY); Order with RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)


- · Outdoor, Wood-burning Fireplace.
- · Insert comes with refractory panels, mesh spark screen and solid steel log grate.
- · 254 lbs./Full Kit





	36	42
A	29"	36"
В	11-3/4"	11-3/4*
C	41"	48"
D	21"	24"
E	35"	42"
F	37*	41"
G	21"	22-1/2"

RIGHT SIDE

GAS LINE









ELECTRICAL

# **Unilock Pedestal System**

### TECHNICAL SPECIFICATIONS


Material	Recycled Polypropylene		
Height Range	11/16" - 37-3/8" (17mm to 950mm)		
Ultimate Compressive Strength <sup>1</sup>	P Series - 20 kN (4,496 lbs)*		
	T Series - 10 kN (2,360 lbs)*		
	M Series - 15 kN (3,372 lbs)*		
Slope correction	0% to 8% @ 1% increment		
Base Diameter	P Series - 6.81" (173 mm)		
	T Series - 6.96" (177 mm)		
	M Series - 8.26" (210 mm)		
Spacer Tab Height	7/16" (11mm)		
Spacer Tab Thickness	1/8" (3mm) [gap between pavers]		
Biological / Chemical	Unaffected by molds and algae		
Resistance	Good resistance to alkali and bitumen		

1Detailed values for individual heights are given in the technical specification

#### MAX PEDESTAL ASSEMBLY OPTIONAL ACCESSORIES FLEMENTS Rubber shim Gap spacers +-----Noise reduction shim. Can also be Gap spacers create spaces between divided into parts. paver tiles with 3 mm width. Self levelling head Self levelling head automatically reduces surface slope up to 7%. Units have graduating heights. Height coupler (use up to 3) Additional Height couplers can be Adjustment ring added to increase pedestal height. for height regulation Adjustment ring allows easy and smooth pedestal height adjustment. Base +------Wide pedestal base for better support. Bases have different heights depending on unit.

T Series are discontinued. Limited quantities available while supplies last. Contact Unilock for more information.

### UNILOCK PEDESTAL HEIGHT CHART

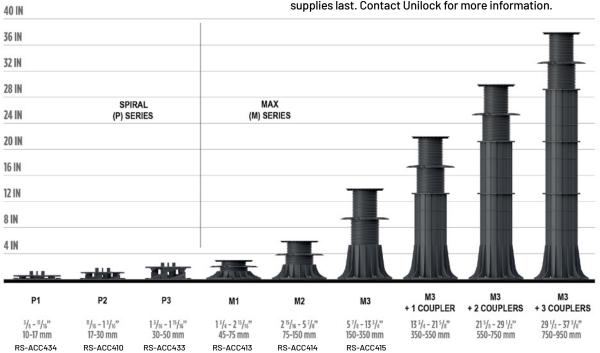

**ACCESSORIES** 

NOTE: These units are created using a combination of of M1, M2 & M3 units. Contact Unilock for more information.

✓ Indicates compatible with Series™, ordered	Moveable Gap Spacer Tabs 1/8" (3MM)	Self-leveling Head 6% MAX	Rubber Shim 1/16" (1.5MM)	Height Coupler 7 %" (200MM)	Slope Corrector 5/8" (16MM)	Drill Driver	Regulation Key	Wall Edge Clip 1/32"(0.7MM) SPECIAL ORDER
separately.  - Indicates not compatible with Series.		RS-ACC417	146 mm 146 mm 145 mm RS-ACC421	200 mm  85 mm  RS-ACC416	220 mm	RS-ACC422	RS-ACC419	RS-ACC450
		1	110 7100 121	No Acc no		110 7100 122	no nee ne	110 7100 100
SPIRAL (P) SERIES	Gap Spacers Included	<b>√</b>	<b>√</b>	_	_	_	_	<b>√</b>
MAX (M) SERIES *	Gap Spacers Included	<b>✓</b>	<b>✓</b>	<b>√</b>	<b>✓</b>	<b>√</b>	<b>√</b>	<b>√</b>

### Sealer Best Practices

- The paver surface should be clean and free from oil, dirt, dust and any loose material. This ensures a uniform result and allows the sealer to better penetrate the surface.
- The pavers should be free of any visible efflorescence.
- If pavers have been sealed before, make sure to reseal with compatible product.
- Surface must be dry (48 hours without precipitation) and warm to the touch (morning).
- · Joint sand must also be dry.
- Make sure lawn sprinklers are shut off.
- Best air temperature is between 50 degrees to 80 degrees with no rain forecasted for the next 24 hours.
- It is best to apply product under constant weather conditions and use the same application method from start to finish.
- The paver joints should be completely filled with dry correctly-graded joint sand. The top level should not exceed the bottom of the chamfer or **1/8" below** the surface on the non-beveled or tumbled paver surface.
- Always test the product on a small hidden area to ensure the results will meet your expectations.
- Always show homeowners samples to ensure expectations.

At this point read all sealer instructions and determine the best sealer for your desired goal. Do you want to retain the original look, enhance the color, or stabilize the sand joint?

- Read application information as each sealer can be applied differently.
- Make sure you have the correct equipment based on type of sealer. Solvent based sealers need solvent resistant sprayers, watering cans or paint trays. Water base sealers can be generally applied using plastic equipment. Example: solvent based sealers come in metal containers and water based sealers come in plastic containers.
- Care should be taken that no excess sealer material is pooled on the surface during application always back roll. When using solvent based sealers make sure roller is solvent resistant or for all paints. Foam rollers work best and are less likely to pull sand from the joints.
- Stabilizing sealers are generally sprayed or flood coated with a watering can, then back rolled.
- Acrylic non-stabilizing sealers can be sprayed, then back rolled or rolled on using a metal paint tray.
- Send your most experienced worker to do sealing projects.

### **Polysand Best Practices**

- Ensure that paver surface has **proper drainage runoff** (Min 1" over 8'). Finished paver height should always be higher than grade to allow proper surface drainage.
- **Do not set pavers in limestone screenings.** This product holds moisture and does not meet the gradation, drainage qualities or strength of coarse concrete sand.
- Make sure payers are **clean of all construction dust**. Residual construction dust will haze payers!
- Compact pavers into setting bed to create proper interlock.
- Read and review all polysand manufacturers methods of application. (Read Directions)
- Don't rush polysand installation.
- Paver area must be completely dry.
- Lay bags of polysand over paver area. Stage bags in areas of coverage. Example: one bag for 60 square feet.
- **Do not over sweep sand.** Sweep sand back and forth within coverage area to fill paver joints.
- Compact sand into joints. This is a must in achieving proper density of the sand joint (repeat 3 times). Compaction is critical to assuring sand strength.
- Do not fill sand above the chamfer of paver. Sand should sit 1/8" below bottom of chamfer.
- Use a fine-bristle broom to remove any excess sand from the paver surface.
- Use a **leaf blower** remove any sand or binder residue.
- Review all watering directions (each manufacturer has different watering instructions.) This is VERY IMPORTANT!
- Always start watering at the bottom of the slope.
- Always start watering in controlled areas per manufacturers recommendations. Example: complete watering in 200 sq. ft. area then
  move on to the next 200 sq. ft. and repeat.
- During final watering of poly sand, clean surface by removing excess water with leaf blower or squeegee depending on paver surface texture. This will remove any leftover binder residue or sand.
- Final thoughts Always be aware of the weather when installing poly sand. (Temperature and setting time ratings differ between products.)
- Refer to all manufacturers websites for installation videos.

### Terms and Conditions of Sale

#### STANDARD TERMS

- 1. All orders are accepted subject to prevailing state or other taxes, and subject to applicable skid charges and the cost of freight applying at the time of shipment. Confirm prices at time of order as they are subject to change.
- 2. The acceptance by the seller of an order shall constitute a binding contract of purchase and sale, in accordance with the terms set out in this agreement.
- 3. These terms and conditions, together with the purchase order, form the complete contract, and there are no representations, warranties, or conditions expressed or implied, affecting this contract, other than as contained herein.
- 4. All sales are made in accordance with the seller's samples, which the purchaser has seen and approved. No guarantee of exact color shades is made.
- 5. Use of any delivered materials by or on behalf of the purchaser shall be deemed to constitute acceptance of the materials by the purchaser.
- 6. Excessive defective material picked up or delivered to the purchaser will be replaced free of charge if a claim is made within five days. Free replacement will be the extent of the seller's warranty. Any such claim will not constitute a reason for delaying payment. All other claims must be submitted within 30 days of purchase.
- 7. Unsuitable or unsatisfactory materials must be available for inspection by the seller to entitle the purchaser to any adjustment or credit. Skid returns will be posted to account next business day.
- 8. No materials may be returned for credit except with the written consent of the seller, whether such materials were ordered in excess of the purchaser's requirement, by mistake, or otherwise. Where the seller agrees to accept the return of goods, these goods are subject to freight charges and a restocking charge of 20% of their value. All goods must be returned in their original packaging. ACCESSORIES, SECTIONS AND OPENED MATERIAL ARE NONRETURNABLE FOR ANY REASON.
- 9. Seller does not accept responsibility for delays in deliveries due to fire, flood, strikes, or any other condition or contingencies beyond its control.
- 10. The purchaser is responsible for installation of the materials on the job site, and the seller has no responsibility in this regard.
- 11. All approved credit accounts are payable within thirty days of invoice. After 30 days, interest will be charged at 1.5%\* per month (A.P.R.19.65%\*), Calculated monthly on the balance owing at the beginning of the period. If purchaser defaults in the payment of any portion of amounts due on this account, the entire remaining unpaid balance shall, at the option of the seller, immediately become due and payable with collection costs incurred.
- 12. Skid deposits are non-refundable with 2 or more broken top boards or one main stringer board. If you have skids loaded onto your vehicle or receive a delivery with skids in this condition, you must have the Unilock representative (loader or truck driver) note the quantity on the shipping document paperwork. The responsibility of the return of empty skids for credit rests with the purchaser. There will be a net usage fee for all skids accepted for return. Skids picked up by Unilock in conjunction with a delivery by a Unilock truck will not be credited until returned to Unilock and sorted and verified by Unilock. Normal delivery charges will apply to requested skid pick-ups which do not coincide with a Unilock delivery to the site.
- 13. A sectioning charge of \$30.00 is applied to all items where bundles are split.

### **GENERAL TERMS**

- 1. All prices are F.O.B. Aurora, IL, Marengo, IL or Elkhorn, WI. Please contact Unilock for all freight rates.
- 2. All C.O.D. orders must be paid by certified check, cash, or prior approved check. Cashier's checks are encouraged over cash due to COVID-19.
- 3. Contact Unilock for shipping schedules, rates, and conditions, and any fuel surcharges.
- 4. Configurations may vary from time to time due to mold design changes.
- 5. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80.00 per hour or fraction thereof. Similarly, delays incurred on partial delivery (1-7 bundles) in excess of one half hour will be billed to the purchaser at the same rate.
- 6. There is a mandatory \$26.00 skid deposit charge for the Standard Four Way Shipping Skids (SKID3842HERM, SKID2640HD & SKID), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.
- 7. There is a mandatory \$30 skid deposit charge for the following Wetcast Product Skids (SKIDPREM1,2,3,4 & 5), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.
- 8. There is a mandatory \$34 skid deposit charge for all Canadian/Elegance Skids & Four Way 48" Solid Top Skids (SKIDLTD & SKIDSOLID48), which are refundable when returned in good condition (a \$2.00 usage fee will be charged). All skid returns will be credited and posted to account the next business day.


#### **CUSTOM ORDERS**

- 1. Custom Orders refer to nonstandard-inventoried items. Deposits of up to 100% of the order value (minimum of 20%) will be required. Minimum quantities apply on custom orders. Custom orders may be subject to a [500] sq.ft. over-run charge. Purchase orders as well as a signed special order release form will be required for custom material. Custom Orders will not be accepted for return.
- 2. All custom produced product must be shipped within 30 days of production. After 30 days all custom produced material will be subject to a storage fee of \$5.00 per pallet per month. Please contact your Territory Manager for more information.

#### CONFIRM ALL PRICES AS THEY ARE SUBJECT TO CHANGE

# Laying Patterns

### ARTLINE™




Artline A - 100% Random

# BEACON HILL™ FLAGSTONE & BRISTOL VALLEY®




Beacon Hill Flagstone/Bristol Valley A - 40% Lg Rectangle, 40% Square, 20% Sm Rectangle




Beacon Hill Flagstone/Bristol Valley B - 40% Lg Rectangle, 40% Square 20% Sm Rectangle

### BEACON HILL FLAGSTONE, BRISTOL VALLEY & UMBRIANO® XL




Beacon Hill Flagstone/Bristol Valley XL C - 67% Random Bundle, 33% XL

### ECO-PRIORA™




Eco-Priora E - 100% Rectangle


### **BRUSSELS BLOCK®**




Brussels P - 67% Standard, 33% Half




Brussels 0 - 67% Standard, 33% Half




Brussels X - 57% XL, 29% Standard, 14% Half



Brussels Y - 57% XL, 29% Standard, 14% Half




Brussels Z - 67% XL, 20% Standard, 13% Half




Brussels AF - 40% XL, 40% Standard, 20% Half

### **COPTHORNE®**




Copthorne A - 100% Standard




Copthorne B - 100% Standard

### **COURTSTONE®**




Courtstone A - 16% Square, 18% Sm Rectangle, 19% Rectangle, 22% Lg Rectangle, 25% XL Rect.

# HOLLANDSTONE™ & HOLLAND PREMIER™




Hollandstone D - 100% 4"x8"




Hollandstone C - 100% 4"x8"

### NATURAL STONE



Natural Stone C - 67% 24" x 24", 33% 12" x 24"




Natural Stone D - 57% 12" x 24", 43% 18" x 24"




Natural Stone F - 34% 24" x 36", 24% 24" x 24", 18% 18" x 24", 24% 12" x 24"

### TRIBECA COBBLE™



Tribeca Cobble - 100% Random Bundle


### WESTPORT™




Westport Random - 34% Large Rectangle, 40% Square, 26% Rectangle

# Laying Patterns

### **ECO-PROMENADE®**




EcoPromenade 3x12 RB A - Running Bond




EcoPromenade 3x12 DHB B-Double Herringbone


### NORDIC COBBLE™



NordicCobble A - 11% Nordic Cobble 89% 12 x 24" Paver




NordicCobble Fan




NordicCobble Circle

### SORENO™




Soreno 16x32 RB A-Running Bond

### **UMBRIANO® RANDOM**




Umbriano Random A - 40% Large Rect., 40% Square, 20% Small Rect.




Umbriano Random B - 40% Large Rect., 40% Square, 20% Small Rect.

### TRE0®




Treo R - 45% Large Rectangle, 35% Square, 20% Small Rectangle




Treo S - 45% Large Rectangle, 35% Square, 20% Small Rectangle

### UMBRIANO®, BEACON HILL FLAGSTONE & BRISTOL VALLEY XL




Beacon Hill Flagstone/Bristol Valley XL G - 50% Random Bundle, 50% XL


### **RICHCLIFF®**




Richcliff A - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff B - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"




Richcliff C - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"



Richcliff D - 53% 12" x 9", 20% 9" x 9", 27% 6" x 9"



Richcliff E - 44.6% Random Bundle, 55.4% Large Rectangle



Richcliff F - 44.6% Random Bundle, 55.4% Large Rectangle


### ARCANA™



Arcana A - 44% 24" x 24", 33% 18" x 24", 23% 12" x 24"




Arcana C - 36% 24" x 24", 27% 18" x 24", 37% 12" x 24"




Arcana F - 67% 24" x 24", 33% 12" x 24",

### SERIES™ 4x8




Series 4x8 HB G-Herringbone



Series 4x8 RB F-Running Bond


### **TOWN HALL®**



Town Hall 4x10 DHB\_B - Double Herringbone

# 2024 Freight Rates

Rates are based on a 0-50 mile radius from Aurora, IL, Marengo, IL & Elkhorn, WI facilities. Please contact the shipping department for all truckload rates and any questions concerning delivery. Approximately 14 bundles or 43,000 pounds per truckload. Delays incurred on delivery in excess of one hour will be billed to the purchaser at \$80 per hour or a fraction thereof. Partial load deliveries in excess of one-half hour will be billed to the purchaser at the same rate. Fuel surcharge will be added to each order per guide below:



Cost of Fuel	Flat Surcharge		
\$2.30 to \$2.79	\$27.00		
\$2.80 to \$3.29	\$42.00		
\$3.30 to \$3.79	\$51.00		
\$3.80 to \$4.29	\$64.00		
\$4.30 to \$4.79	\$78 .00		
\$4.80 to \$5.29	\$93.00		
\$5.30 to \$5.79	\$106.00		

At Least	Less Than	Fuel Surcharge
\$2.30	\$2.79	5%
\$2.80	\$3.29	10%
\$3.30	\$3.79	15%
\$3.80	\$4.29	20%
\$4.30	\$4.79	25%
\$4.80	\$5.29	30%
\$5.30	\$5.79	35%

Fuel Surcharge for 0-50 miles only

Fuel Surcharge for deliveries over 50 miles

NOTE: Rates are based on current economic conditions and are subject to fuel surcharges, which will be based on the U.S. National Average Midwest rate of diesel fuel, calculated weekly. When the average price of fuel rises (or drops), the surcharge will take effect the following Monday. These rates can be located at www.eia.gov/petroleum/gasdiesel/.

### IMPORTANT NOTES

### SPECIAL ORDER PRODUCTS

Products listed as "Special Order" are not currently inventoried and may require additional lead times for manufacturing (or transfer from other Unilock locations). Prior to bidding or quoting projects, confirm Special Order unit pricing and minimum quantity requirements. A signed "Special Order Release Form" must be submitted prior to manufacturing and all material must begin shipping within 30 days of manufacturing date. Any Special Order products remaining at Unilock after 30 days will be subjected to a storage fee of \$5.00 per pallet per month. (Maximum storage is 3 months.) All quantities listed on the Special Order Release Form must ship and be paid in full. Please contact your Territory Manager for more information.

### SPECIAL SAND GUIDANCE

EXTRA CARE must be exercised when using Polymeric Sand on the following products:

Copthorne® II Campo® Richcliff® Series™ Town Hall® Tribeca Cobble Umbriano™ Arcana Courtstone®

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

IMPORTANT COMPACTION NOTICE: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners. Please refer to each individual manufacturer for full instructions prior to install.

### NATURAL STONE INSTALLATION GUIDELINES

A slurry coat, sometimes called a bond or milk sealer coat, is brushed on to the back of each natural stone unit prior to installation in order to limit moisture penetration, prevent staining and aid adhesion.

### OPTIMAL COLOR BLENDING INSTALLATION

Blending colors from multiple (3+) bundles is ideal for the optimal color installaton. DO NOT LAY PALLET TO PALLET!

## IMPORTANT NOTES continued

### **UNILOCK PAVER PATTERNS**

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

### TRANSFERABLE LIFETIME GUARANTEE

Unilock provides a Transferable Lifetime Guarantee\* on the structural integrity of our paving stones, slabs and retaining wall units to the original purchaser of the product for residential use. Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Color matching cannot be guaranteed and replacement labor is not included. Proof of purchase is required.

Excessive defective material (over the industry accepted normal of 2% for non-tumbled unit pavers) delivered to the purchaser will be replaced free of charge if a written claim is made within 5 days of delivery from the manufacturer. Such claims will not constitute reason for delaying payment. All goods shall be deemed accepted if completely installed. Inspect concrete products prior to opening bundle packaging to ensure that shape and color are as ordered. Unsatisfactory material must be available for inspection by Unilock to entitle the purchaser to any adjustment or credit. Inspect all concrete units during installation and set aside any which are chipped or cracked to use for any cut pieces required. The color of concrete products may vary significantly between production lots. Always install concrete units from several bundles simultaneously to ensure proper distribution of color. Prior to final compaction, inspect installed pavers for good color distribution. Relocate certain pavers, if necessary, to achieve desired color blend.

\*Transferable Lifetime Guarantee: Register your project within 60 days of your dated proof of purchase to ensure your Unilock Guarantee is fully transferable! Simply go online at unilock.com and follow instructions. Once processed, you will receive an original Transferable Warranty Certificate for your records.

### PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

#### TRADEMARK & LEGAL INFORMATION

Umbriano\* is a trademark of Metten Stein + Design GmbH & Co KG used under license by Unilock. Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified.

Colors shown in this brochure should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area. Not all products shown are available at all Unilock locations. Log on to www.unilock.com for availability. Measurements throughout this portfolio are nominal.

©2024 Hengestone Holdings, Inc.

# UNILOCK® QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



### LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS - Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. While EasyClean helps to increase a paver's resistance to staining from various substances, it does not make our products stain-proof nor does it resist every kind of stain. The Unilock warranty also does not cover deterioration or damage as a result of

poor design or poor installation practices that are contrary to specifications as laid out by ICPI (Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www. icpi.org and www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

### MAINTENANCE ADVISORY

### 1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance.

To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit Unilock.com to register for your Transferable Lifetime Guarantee.

### 2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts - The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

### **COLOR ADVISORY**

### 1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color. Note: Unilock Natural Stone variations are outside the control of Unilock. Purchasers of natural stone must be willing to accept this inherent variability.

### 2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

### 3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

### 4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

### INSTALLATION ADVISORY

### 1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

### 2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

### 3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

### FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

### **CHICAGO PRODUCT DIRECTORY**

### **UNIT PAVERS**

Product	Page	Finish	Pedestrian	Residential Vehicular	Commercial Vehicular	Environmental	For Borders & Accents
ADA Paver	4	S	~				
Anchorlock™	5	S	~		<b>✓</b>		
Arcana™	6	SM	<b>✓</b>				
Artline™	7	М	~	<b>✓</b>			
Beacon Hill™ Flagstone	10	F	~				
Beacon Hill™ Smooth	12	SM	~				
Bristol Valley®	14	F	<b>✓</b>				
Brussels Block®	16	W	~	<b>✓</b>			<b>~</b>
Copthorne®	17	Т	<b>✓</b>	<b>✓</b>			~
Courtstone®	18	С	~	<b>✓</b>			~
Eco-Line®	19	М	•	•	•	•	~
Eco-Optiloc™	20	M	~	<b>✓</b>	<b>✓</b>	<b>✓</b>	
Eco-Priora™	21	М	<b>✓</b>	<b>✓</b>	<b>✓</b>	•	
Eco-Promenade®	22	M	~	<b>✓</b>	<b>✓</b>	•	
Promenade™ EcoTerra	23	SM	<b>✓</b>	<b>✓</b>			
Granito™	24	S	<b>✓</b>	<b>✓</b>	<b>✓</b>		
Hex™	25	S	~	<b>✓</b>		•	
Hollandstone™	26	S	~	<b>✓</b>	<b>✓</b>		<b>✓</b>
Holland Premier ™	28	S	<b>✓</b>	<b>✓</b>			•
Mattoni™	29	SM	~	<b>✓</b>			•
Natural Stone	30	SM	<b>✓</b>				
Nordic Cobble™	34	WS	~	<b>✓</b>	<b>✓</b>	•	<b>~</b>
Optiloc®	35	М	~	<b>✓</b>	<b>✓</b>		
Porcelain	36	SM	~				
Promenade°	39	М	~	•	•		<b>~</b>
Richcliff®	41	Т	~	<b>✓</b>			<b>~</b>
Series™	42	ws	~	~	~		~
Skyline™	44	S	~				
Soreno™	45	SM	•				
Town Hall®	46	Т	~	<b>✓</b>	<b>✓</b>	•	~
Treo® Smooth	47	SM	~	~		•	~
Tribeca Cobble	48	WS	<b>✓</b>	<b>✓</b>	<b>✓</b>	•	~
Turfstone™	49	S		•	•	•	
Umbriano™	50	SZ	<b>✓</b>	<b>✓</b>	<b>✓</b>	•	•
Westport™	52	Т	<b>~</b>	<b>~</b>			J

### RETAINING WALLS

Product	Page	Finish	Gardens	Retaining Walls	Steps	Seatwalls	Pillars
Brussels Dimensional Stone®	54	W	~		~	~	~
DuraHold®	55	SM		<b>✓</b>	•	<b>✓</b>	
Estate Wall™	56	SP/W	~	<b>✓</b>	•	<b>✓</b>	<b>-</b>
Lineo™ Dimensional Stone	57	SM	~		•	<b>✓</b>	-
Mackinaw <sup>™</sup>	58	SP	~	•		<b>✓</b>	
Olde Quarry™	59	W	~	<b>✓</b>	•	<b>✓</b>	<b>~</b>
Olde Quarry™ Smooth	60	SM	~	<b>✓</b>	•	<b>✓</b>	<b>✓</b>
Pisa™	61	SP	•	<b>✓</b>	•	<b>✓</b>	<b>✓</b>
Pisa <sup>™</sup> Smooth XL	62	SM	~	<b>✓</b>	•	<b>✓</b>	<b>✓</b>
Rivercrest®	63	S	<b>✓</b>	<b>✓</b>	•	<b>✓</b>	•
SienaEdge™	64	SM	•	•	•	•	
SienaStone®	65	SP		<b>✓</b>	•		
U-Cara®	67	М	•	<b>✓</b>	<b>✓</b>	<b>✓</b>	-

Finishes: B=Brushed; C=Cobblestone; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed. This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

# ADD 3D LANDSCAPE DESIGN TO YOUR TOOLBOX







# UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.

SCAN THE QR CODE FOR
MORE INFORMATION OR TO
DOWNLOAD A FREE 30-DAY TRAIL
OF UVISION 3D LANDSCAPE CREATOR.





# Let's

# BUILD YOUR BUSINESS TOGETHER.

CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO CONNECT WITH YOUR LOCAL TERRITORY MANAGER



(508) 278-4536

### CHICAGO

(630) 892-9191

### MILWAUKEE

(262)742-3890



(202) 798-2060

### ONTARIO

(416) 646-9000



