

20TH
ANNIVERSARY

 FIREGEAR PRODUCT GUIDE

KALEA BAY OUTDOOR FIREPLACE



OFP-72LECO-NLED | Stainless Steel Kalea Bay - 72" Wide

FULL LED SPECTRUM

FEATURES

Full spectrum lighting (120VAC Required)

Model Sizes: 36" / 48" / 60" / 72" (all 16" tall opening)

Burner & firebox constructed of weather/corrosion resistant 304 stainless steel.

Ecoflow Electronic Ignition System features built-in safety shutoff in case of loss of flame and auto-relight.

Control Center with each model housed in 304 Stainless Steel Cabinet.

Ships as Natural Gas (NG) or Liquid Propane (LP). Field Convertible to Liquid Propane (LP). *Conversion Kits sold separately.*

Tested & Approved to:
ANSI Z21.97-2017 • CSA 2.41-2017




CONTROL PANEL

On/Off + Low/High + Continuous Pilot
+ Learn + LED On/Off

RGB Dials (3 in total) > Over 16 Million Colors!

TWO DIFFERENT STYLES FOR THE KALEA BAY

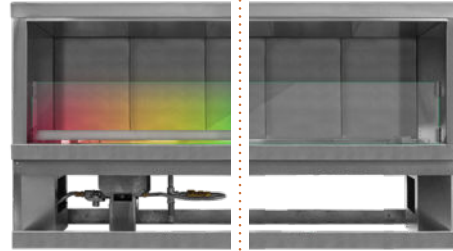

FULLY BATTERY OPERATED

FEATURES

Fully Battery-operated Ignition

Model Sizes: 48" / 60" (all 16" tall opening)

Burner & firebox constructed of weather/corrosion resistant 304 stainless steel.

Ecoflow Electronic Ignition System features built-in safety shutoff in case of loss of flame and auto-relight.

Control Center with each model housed in 304 Stainless Steel Cabinet.


Ships as Natural Gas (NG) or Liquid Propane (LP). Field Convertible to Liquid Propane (LP). *Conversion Kits sold separately.*

Tested & Approved to:
ANSI Z21.97-2017 • CSA 2.41-2017





CONTROL PANEL

On/Off + Low/High
+ Continuous Pilot + Learn

Easy access to the Battery Tray



LED KALEA BAY MODELS



| Model | Firebox Size | Gas Type | BTU Low | BTU High | Conv. Kit | See Through Conv. Kit | Weather Cover |
|-----------------|-----------------------|----------|---------|----------|----------------|-----------------------|---------------|
| OFP-36LECO-NLED | 36" W x 16" H x 16" D | NG | 18,500 | 31,000 | OFP-36LECO-LPK | 78002 | OFP-36COV |
| OFP-48LECO-NLED | 48" W x 16" H x 16" D | NG | 24,500 | 43,500 | OFP-48LECO-LPK | 78004 | OFP-48COV |
| OFP-60LECO-NLED | 60" W x 16" H x 16" D | NG | 36,000 | 50,000 | OFP-60LECO-LPK | 78006 | OFP-60COV |
| OFP-72LECO-NLED | 72" W x 16" H x 16" D | NG | 42,000 | 65,000 | OFP-72LECO-LPK | 78008 | OFP-72COV |
| OFP-36LECO-PLED | 36" W x 16" H x 16" D | LP | 18,500 | 31,000 | OFP-36LECO-LPK | 78002 | OFP-36COV |
| OFP-48LECO-PLED | 48" W x 16" H x 16" D | LP | 24,500 | 43,500 | OFP-48LECO-LPK | 78004 | OFP-48COV |
| OFP-60LECO-PLED | 60" W x 16" H x 16" D | LP | 36,000 | 50,000 | OFP-60LECO-LPK | 78006 | OFP-60COV |
| OFP-72LECO-PLED | 72" W x 16" H x 16" D | LP | 42,000 | 65,000 | OFP-72LECO-LPK | 78008 | OFP-72COV |

BATTERY KALEA BAY MODELS



| Model | Firebox Size | Gas Type | BTU Low | BTU High | Conv. Kit | See Through Conv. Kit | Weather Cover |
|--------------|-----------------------|----------|---------|----------|----------------|-----------------------|---------------|
| OFP-48LECO-N | 48" W x 16" H x 16" D | NG | 24,500 | 43,500 | OFP-48LECO-LPK | 78010 | OFP-48COV |
| OFP-60LECO-N | 60" W x 16" H x 16" D | NG | 36,000 | 50,000 | OFP-60LECO-LPK | 78011 | OFP-60COV |
| OFP-48LECO-P | 48" W x 16" H x 16" D | LP | 24,500 | 43,500 | OFP-48LECO-LPK | 78010 | OFP-48COV |
| OFP-60LECO-P | 60" W x 16" H x 16" D | LP | 36,000 | 50,000 | OFP-60LECO-LPK | 78011 | OFP-60COV |

SEE-THROUGH CONVERSION KITS

Each conversion kit includes a 2-Piece Glass Windshield Kit, Stainless Steel Hood, and LED Tray & Strips (only for LED Models).

| Model | Description |
|-------|--|
| 78002 | For the 36" LED Kalea Bay (NG or LP) |
| 78004 | For the 48" LED Kalea Bay (NG or LP) |
| 78006 | For the 60" LED Kalea Bay (NG or LP) |
| 78008 | For the 72" LED Kalea Bay (NG or LP) |
| 78010 | For the 48" BATTERY Kalea Bay (NG or LP) |
| 78011 | For the 60" BATTERY Kalea Bay (NG or LP) |

WEATHER COVERS

The Kalea Bay Weather Cover is a panel that locks on to the Firebox - it's constructed of 304 Stainless Steel.

| Model | Description |
|-----------|----------------------------------|
| OFP-36COV | For the 36" Kalea Bay (NG or LP) |
| OFP-48COV | For the 48" Kalea Bay (NG or LP) |
| OFP-60COV | For the 60" Kalea Bay (NG or LP) |
| OFP-72COV | For the 72" Kalea Bay (NG or LP) |

OPTIONAL ACCESSORIES

The items listed below are optional, as the Kalea Bay comes standard with a 10" Wire Harness

| Model | Description |
|-----------------|--|
| 77111 | 10' long, 6-pin LED Extension wire harness - for LED Models only |
| 77161 | 10' long, 8-pin Mod Extension wire harness for LED and Non-LED Models |
| VCS-ECOBUEXT120 | 2-pin battery pack extension wire to extend the wire on a battery pack of the NON-LED Kalea Bay. |

Kalea Bay LP Conversion Kits (Both LED & BATTERY models)
36" Kalea Bay > **OFP-36LECO-LPK** 60" Kalea Bay > **OFP-60LECO-LPK**
48" Kalea Bay > **OFP-48LECO-LPK** 72" Kalea Bay > **OFP-72LECO-LPK**

Media for the Kalea Bay
Rock Media, Glass, and/or Log Sets are **NOT INCLUDED** with a Kalea Bay. You can find our full selection of Fire Jewelry on page: **23**



SANCTUARY SERIES


GFRC FIRE TABLES & FIRE BOWLS



SAN176-TPSI-N-CH
Raven color GFRC Enclosure with TPSI Burner System

Fire Tables **SANCTUARY 1**

GFRC Fire Table offered in 56" and 76" lengths (optional weather cover available for purchase)
Available with Pro Brass or Stainless Steel Burner Systems
Colors Available: Slate - Arctic - Chocolate - Raven

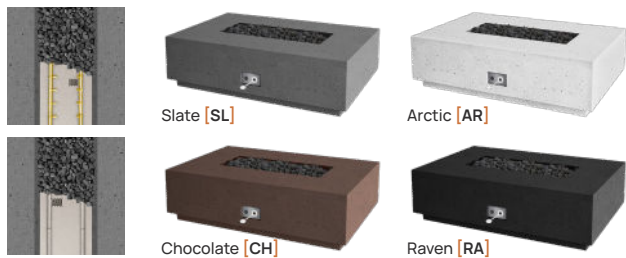


Fire Bowls **SANCTUARY 2 & 3**

GFRC Fire Bowls offered in 29" and 39" diameters (weather cover included)
Available with Pro Brass or Stainless Steel Burner Systems
Colors Available: Slate - Arctic - Chocolate - Raven




Sanctuary 1 - 76 » Pro Series Burner System Pro Brass Sanctuary Series are designed to be NG or LP from the Factory. *We do NOT offer Gas Conversion Kits.*

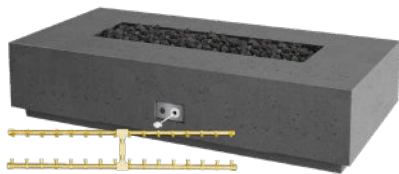


| Model | Ignition | Dimensions | BTU | BTU |
|---------------------|----------|-----------------------|---------|-----|
| SAN176-PSAWS-N-[] | AWS | 76" L x 38" W x 16" H | 150,000 | NG |
| SAN176-PSAWS-P-[] | AWS | 76" L x 38" W x 16" H | 160,000 | LP |
| SAN176-PSTPSI-N-[] | TPSI | 76" L x 38" W x 16" H | 150,000 | NG |
| SAN176-PSTPSI-P-[] | TPSI | 76" L x 38" W x 16" H | 160,000 | LP |
| SAN176-PSMT-N-[] | MT | 76" L x 38" W x 16" H | 150,000 | NG |
| SAN176-PSMT-P-[] | MT | 76" L x 38" W x 16" H | 160,000 | LP |

Sanctuary 1 - 56 » Pro Series Burner System Pro Brass Sanctuary Series are designed to be NG or LP from the Factory. *We do NOT offer Gas Conversion Kits.*



| Model | Ignition | Dimensions | BTU | Gas Type |
|-----------------------|----------|-----------------------|---------|----------|
| SAN1-PS30LHAWS-N-[] | AWS | 56" L x 38" W x 16" H | 80,000 | NG |
| SAN1-PS30LHAWS-P-[] | AWS | 56" L x 38" W x 16" H | 110,000 | LP |
| SAN1-PS30LHTPSI-N-[] | TPSI | 56" L x 38" W x 16" H | 80,000 | NG |
| SAN1-PS30LHTPSI-P-[] | TPSI | 56" L x 38" W x 16" H | 110,000 | LP |
| SAN1-PS30LHMT-N-[] | MT | 56" L x 38" W x 16" H | 80,000 | NG |
| SAN1-PS30LHMT-P-[] | MT | 56" L x 38" W x 16" H | 110,000 | LP |


Sanctuary 2 » Pro Series Burner System Pro Brass Sanctuary Series are designed to be NG or LP from the Factory. *We do NOT offer Gas Conversion Kits.*



| Model | Ignition | Dimensions | BTU | Gas Type |
|----------------------|----------|----------------------|---------|----------|
| SAN2-34DPSAWS-N-[] | AWS | 39" Diameter x 18" H | 145,000 | NG |
| SAN2-34DPSAWS-P-[] | AWS | 39" Diameter x 18" H | 124,000 | LP |
| SAN2-34DPSTPSI-N-[] | TPSI | 39" Diameter x 18" H | 145,000 | NG |
| SAN2-34DPSTPSI-P-[] | TPSI | 39" Diameter x 18" H | 124,000 | LP |
| SAN2-34DPSMT-N-[] | MT | 39" Diameter x 18" H | 145,000 | NG |
| SAN2-34DPSMT-P-[] | MT | 39" Diameter x 18" H | 124,000 | LP |


Sanctuary 3 » Pro Series Burner System

Pro Brass Sanctuary Series are designed to be NG or LP from the Factory. *We do NOT offer Gas Conversion Kits.*



| Model | Ignition | Dimensions | BTU | Gas Type |
|----------------------|----------|----------------------|--------|----------|
| SAN3-26DPSAWS-N-[] | AWS | 29" Diameter x 14" H | 50,000 | NG |
| SAN3-26DPSAWS-P-[] | AWS | 29" Diameter x 14" H | 42,000 | LP |
| SAN3-26DPSTPSI-N-[] | TPSI | 29" Diameter x 14" H | 50,000 | NG |
| SAN3-26DPSTPSI-P-[] | TPSI | 29" Diameter x 14" H | 42,000 | LP |
| SAN3-26DPSMT-N-[] | MT | 29" Diameter x 14" H | 50,000 | NG |
| SAN3-26DPSMT-P-[] | MT | 29" Diameter x 14" H | 42,000 | LP |

Sanctuary 76 » Stainless Steel Burner System

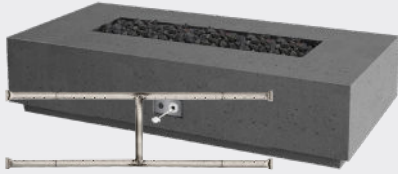

| Model | Ignition | Dimensions | BTU | LP Conv. Kit |
|-------------------|----------|-----------------------|---------|--------------------------|
| SAN176-AWS-N-[] | AWS | 76" L x 38" W x 16" H | 125,000 | OAS-LPK31 + FG-AWS-PBO-P |
| SAN176-TPSI-N-[] | TPSI | 76" L x 38" W x 16" H | 125,000 | TPSI-LPK31 |
| SAN176-TPSI-P-[] | TPSI | 76" L x 38" W x 16" H | 125,000 | Sold as LP >N/A |
| SAN176-MT-N-[] | MT | 76" L x 38" W x 16" H | 125,000 | OAS-LPK31 |

Sanctuary 1 » Stainless Steel Burner System



| Model | Ignition | Dimensions | BTU | LP Conv. Kit |
|---------------------|----------|-----------------------|---------|--------------------------|
| SAN1-30LHAWS-N-[] | AWS | 56" L x 38" W x 16" H | 100,000 | OAS-LPK35 + FG-AWS-PBO-P |
| SAN1-30LHAWS-P-[] | AWS | 56" L x 38" W x 16" H | 100,000 | Sold as LP >N/A |
| SAN1-30LHTPSI-[] | TPSI | 56" L x 38" W x 16" H | 100,000 | TPSI-LPK35 |
| SAN1-30LHTPSI-[]-P | TPSI | 56" L x 38" W x 16" H | 100,000 | Sold as LP >N/A |
| SAN1-30LHMT-N-[] | MT | 56" L x 38" W x 16" H | 100,000 | OAS-LPK35 |

Sanctuary 2 » Stainless Steel Burner System



| Model | Ignition | Dimensions | BTU | LP Conv. Kit |
|----------------------|----------|----------------------|---------|--------------------------|
| SAN2-34DBSAWS-N-[] | AWS | 39" Diameter x 18" H | 125,000 | OAS-LPK31 + FG-AWS-PBO-P |
| SAN2-34DBSAWS-P-[] | AWS | 39" Diameter x 18" H | 125,000 | Sold as LP >N/A |
| SAN2-34DBSTPSI-[] | TPSI | 39" Diameter x 18" H | 125,000 | TPSI-LPK31 |
| SAN2-34DBSTPSI-[]-P | TPSI | 39" Diameter x 18" H | 125,000 | Sold as LP >N/A |
| SAN2-34DBSMT-[] | MT | 39" Diameter x 18" H | 125,000 | OAS-LPK31 |

Sanctuary 3 » Stainless Steel Burner System



| Model | Ignition | Dimensions | BTU | LP Conv. Kit |
|----------------------|----------|----------------------|--------|--------------------------|
| SAN3-26DBSAWS-N-[] | AWS | 30" Diameter x 14" H | 75,000 | OAS-LPK41 + FG-AWS-PBO-P |
| SAN3-26DBSAWS-P-[] | AWS | 30" Diameter x 14" H | 75,000 | Sold as LP >N/A |
| SAN3-26DBSTPSI-[] | TPSI | 30" Diameter x 14" H | 75,000 | TPSI-LPK41 |
| SAN3-26DBSTPSI-[]-P | TPSI | 30" Diameter x 14" H | 75,000 | Sold as LP >N/A |
| SAN3-26DBSMT-[] | MT | 30" Diameter x 14" H | 75,000 | OAS-LPK41 |

LIQUID PROPANE TANK HOUSING



GFRC Enclosure for a Standard Propane Tank

| Model | Dimensions |
|--------------------|-------------------|
| SANCTUARY-LPTE-[] | 20" W x 20 1/2" H |

WEATHER COVER



| Model | Dimensions |
|---------------|----------------------|
| COVER-SANI-76 | For the Sanctuary 76 |
| COVER-SANI | For the Sanctuary 1 |
| COVER-SAN2 | For the Sanctuary 2 |
| COVER-SAN3 | For the Sanctuary 3 |

Media for the Sanctuary Series
Rock Media, Glass, and/or Log Sets are **NOT INCLUDED** with the Sanctuary Series.
You can find our full selection of Fire Jewelry on page: **23**

LUME SMOKE-LESS FIRE PIT

LUME INSERT » Smoke-Less Fire Pit Insert




Image Shown
LUME-34R > inside paver blocks

- Unique design for less smoke
- Insert into SRW Block, Bricks, or other Non-Combustible Material

Transform your ordinary paver fire pit into an extraordinary smokeless sanctuary with our **LUME Insert** > A Metal Smokeless Fire Pit insert. Enjoy the mesmerizing dance of flames without the annoyance of smoke, and create unforgettable moments in your backyard oasis. Upgrade your outdoor experience with ease, style, and the ultimate comfort of a smoke-free ambiance.

| Model | Rim Outer Diam. | Rim Inner Diam. | Base Outer Diam. | Height | Weight | Fits Openings |
|----------|-----------------|-----------------|------------------|--------|---------|---------------|
| LUME-29R | 34" | 26" | 29" | 12" | 21 lbs. | 29" - 32" |
| LUME-34R | 39" | 31" | 34" | 12" | 25 lbs. | 34" - 37" |
| LUME-36R | 41" | 34" | 36" | 12" | 26 lbs. | 36" - 39" |



**OPTIONAL
STAINLESS
STEEL LIDS**

MODELS > LID-LUME-29R
LID-LUME-34R
LID-LUME-36R

LUME DOUBLE WALL INSERT » Smoke-Less Fire Pit Insert

NOTE > Not available in all markets - please check with your Firegear Distributor for availability.



Stainless Steel

Black High Temp
Painted Carbon Steel

Features

- Round or Square Double Wall Insert
- Flat lid included
- Available in 24" or 30" (round only) diameters
- Stainless Steel or Black high temperature painted carbon steel

| Model Number | Shape | Overall Dimensions | Rim Outer Diam. | Rim Inner Diam. | Base Outer Diam. | Height | Weight | Fits Opening |
|--------------|--------|--------------------|-----------------|-----------------|------------------|---------|----------|--------------|
| LUME-24R-SS | Round | 35" W x 12.062" H | 35" | 22" | 25.1" | 12.062" | 111 lbs. | 27" - 33" |
| LUME-30R-SS | Round | 41" W x 12.06" H | 41" | 28" | 31.62" | 12.05" | 143 lbs. | 32" - 39" |
| LUME-24R-BK | Round | 35" W x 12.062" H | 35" | 22" | 25.1" | 12.062" | 113 lbs. | 27" - 33" |
| LUME-30R-BK | Round | 41" W x 12.06" H | 41" | 28" | 31.62" | 12.05" | 146 lbs. | 32" - 39" |
| LUME-24SQ-SS | Square | 35" W x 12.19" H | 35" | 24" | 25.1" | 12.19" | 135 lbs. | 27" - 33" |
| LUME-24SQ-BK | Square | 35" W x 12.19" H | 35" | 24" | 25.1" | 12.19" | 147 lbs. | 27" - 33" |

LUME SURROUND » Smoke-Less Fire Pit + GFRC Enclosure

NOTE > Not available in all markets - please check with your Firegear Distributor for availability.



INCLUDED LID: LID-LUME-MS-A
Stainless steel protected lid for the Lume Surround.



Image Shown
LUME-SUR1-SL

Introducing the **LUME Surround**, the ultimate combination of style and functionality. Experience the magic of a smokeless fire pit enclosed within a stunning GFRC bowl, creating an exquisite centerpiece for your outdoor living space.

**Color
OPTIONS**



Slate
SL



Raven
RA

| Model | Color | Overall Dimensions | Base Width | Interior Diameter |
|--------------|-------|--------------------|------------|-------------------|
| LUME-SUR1-RA | Slate | 42" W x 18" H | 20" W | 23 1/2" W |
| LUME-SUR1-SL | Raven | 42" W x 18" H | 20" W | 23 1/2" W |

OPTIONAL COVER: COV-SUR1 > 100% water resistant, UV-Protected to prevent fading, custom fitted and features a soft flannel backing, spring cinch lock.

IGNITION SYSTEMS OVERVIEW + A LA CARTE



Ignition System Overview »

To get a detailed overview of the **MT / TPSI / AWS** Ignition Systems & how they function, please scan the **QR Code**.

AWS Single Fire Feature Components



- Used for a single fire feature
- Can only be installed in fire features that are greater than 10 feet away from a pool or spa.
- All components can be housed underneath the burner.

| Model | Description |
|--------------------|--|
| FG-AWS30VDC-GOEK-N | Includes: 290K BTU Capacity 30VDC Valve System for Natural Gas, 30" Pilot Assembly, Heat Shield, Wire Leads, Hardware Bag, GOE-30VDC Power Supply, On/Off Weatherproof Rocker Switch and Stainless Steel Mounting Plate - 290K BTU NG (replaces part # FG-AWS30VDC-RCK) |
| FG-AWS30VDC-GOEK-P | Includes: 290K BTU Capacity 30VDC Valve System for Liquid Propane, 30" Pilot Assembly, Heat Shield, Wire Leads, Hardware Bag, GOE-30VDC Power Supply, On/Off Weatherproof Rocker Switch and Stainless Steel Mounting Plate - 290K BTU LP (replaces part # FG-AWS30VDC-RCK) |
| AWS-FACEPLATE | Stainless Steel Faceplate (only) for AWS Valve Systems for mounting Key Valve and ON/OFF Weatherproof Switch |

AWS Multiple Fire Feature Components



- One kit per fire feature. One power supply (sold separately) for every 4 fire features.
- Used when running 1 – 4 fire features. Also used when running a single or multiple fire features within 5 feet of a pool / spa.

| Model | Description |
|--------------------|---|
| FG-AWS30VDC-HC-K-N | NEW HIGHER BTU: 715K BTU Capacity 30VDC Valve System, High Capacity Natural Gas Valve System - 3/4 FIP Inlet, 3/4 FIP Outlet, 30" Pilot Assembly, Mounting Plate for High Capacity Key Valve (3/4" IPS straight Valve with Key) and On/Off Weatherproof Rocker Switch, Heat Shield, Mounting Hardware, Wire 10' AWS Power Wire to Valve, T300-9898-34 (5/8" OD, 1/2" ID Tranquiline Gas Flex Connector, 3/4" Stainless Steel Close Nipple, 5/8" Flare x 3/4" MIP Steel Adapter (Tapped 1/2 FIP), Power Supply and Orifice Not Included - 715K BTU NG |
| FG-AWS30VDC-HC-K-P | NEW HIGHER BTU: 715K BTU Capacity 30VDC Valve System, High Capacity Natural Gas Valve System - 3/4 FIP Inlet, 3/4 FIP Outlet, 30" Pilot Assembly, Mounting Plate for High Capacity Key Valve (3/4" IPS straight Valve with Key) and On/Off Weatherproof Rocker Switch, Heat Shield, Mounting Hardware, Wire 10' AWS Power Wire to Valve, T300-9898-34 (5/8" OD, 1/2" ID Tranquiline Gas Flex Connector, 3/4" Stainless Steel Close Nipple, 5/8" Flare x 3/4" MIP Steel Adapter (Tapped 1/2 FIP), Power Supply and Orifice Not Included - 715K BTU LP |
| FG-AWS30VDC-K-N | 290K BTU Capacity 30VDC Valve System for Natural Gas - 1/2 FIP Inlet, 1/2 FIP Outlet, 30" Pilot Assembly, Mounting Plate for High Capacity Key Valve (3/4" IPS straight Valve with Key) and On/Off Weatherproof Rocker Switch, Heat Shield, Mounting Hardware, Wire 10' AWS Power Wire to Valve, T200-9898-46 (1/2" OD, 3/8" ID Tranquiline Gas Flex Connector, Stainless Steel Coupler, 1/2" Flare x 1/2" MIP Steel Adapter (Tapped 1/2 FIP), Power Supply and Orifice Not Included - 290K BTU NG |
| FG-AWS30VDC-K-P | 290K BTU Capacity 30VDC Valve System for Liquid Propane - 1/2 FIP Inlet, 1/2 FIP Outlet, 30" Pilot Assembly, Mounting Plate for High Capacity Key Valve (3/4" IPS straight Valve with Key) and On/Off Weatherproof Rocker Switch, Heat Shield, Mounting Hardware, Wire 10' AWS Power Wire to Valve, T200-9898-46 (1/2" OD, 3/8" ID Tranquiline Gas Flex Connector, Stainless Steel Coupler, 1/2" Flare x 1/2" MIP Steel Adapter (Tapped 1/2 FIP), Power Supply and Orifice Not Included - 290K BTU LP |
| FG-AWS30VDC-RCK | 290K BTU Capacity 30VDC Valve System for Natural Gas - 1/2 FIP Inlet, 1/2 FIP Outlet, 30" Pilot Assembly, Heat Shield, Mounting Hardware, FG-1420-AOD On/Off remote kit with weatherproof enclosure, GOE-30VDC Power Supply, Orifice Not Included - 290K BTU NG |
| FG-AWS-PS-30V320 | 30VDC, 320W Power Supply - POOL CERTIFIED - built into NEMA Approved Enclosure - for use with single installation or up to four fire features, max distance run of 500' - Replaces FG-PS-30V320 |
| AWS-FACEPLATE | Stainless Steel Faceplate (only) for AWS Valve Systems for mounting Key Valve and ON/OFF Weatherproof Switch |

AWS Ignition Accessories



GEO-30VDC



FG-AWS-PS-30V320



FG-EMER-STOP
Electrical Emergency Stop for 120VAC or 30VDC Appliances, housed in Weatherproof J-Box and Weatherproof Cover



FG-TIMER-2HR
120VAC Two (2) Hour Mechanical Timer, housed in Weatherproof J-Box and Weatherproof Cover
30v Systems ONLY



FG-WS-OD
120VAC Wired Wall Switch housed in Weatherproof J-Box and Weatherproof Cover
30v Systems ONLY



FG-1420-AOD
1420-A (On/Off/Remote) with 110 Receiver. With weatherproof J-Box and weatherproof cover


PRO SERIES BURNERS

BURNERS & BURNER KITS

Each Burner & Burner Kit is designed to be Natural Gas or Propane from the Factory

Firegear does **NOT** offer Gas Conversion Kits for Pro Series Burners

Snowflake » Burner Only



| Model | Size | BTU |
|-----------------|------|---------|
| FG-PSBR-SF11-NG | 11" | 50,000 |
| FG-PSBR-SF18-NG | 18" | 145,000 |
| FG-PSBR-SF25-NG | 25" | 260,000 |
| FG-PSBR-SF32-NG | 32" | 426,000 |
| FG-PSBR-SF11-LP | 11" | 42,000 |
| FG-PSBR-SF18-LP | 18" | 124,000 |
| FG-PSBR-SF25-LP | 25" | 240,000 |
| FG-PSBR-SF32-LP | 32" | 402,000 |

Snowflake » Burner Kit



| Model | Pan Size | BTU |
|------------------|----------|---------|
| FG-PSBR-SF11-NGK | 11" | 50,000 |
| FG-PSBR-SF18-NGK | 18" | 145,000 |
| FG-PSBR-SF25-NGK | 25" | 260,000 |
| FG-PSBR-SF32-NGK | 32" | 426,000 |
| FG-PSBR-SF11-LPK | 11" | 42,000 |
| FG-PSBR-SF18-LPK | 18" | 124,000 |
| FG-PSBR-SF25-LPK | 25" | 240,000 |
| FG-PSBR-SF32-LPK | 32" | 402,000 |

Spur » Burner Only



| Model | Size | BTU |
|-----------------|------|---------|
| FG-PSBR-BS10-NG | 10" | 80,000 |
| FG-PSBR-BS14-NG | 14" | 125,000 |
| FG-PSBR-BS10-LP | 10" | 95,000 |
| FG-PSBR-BS14-LP | 14" | 160,000 |

Spur » Burner Kit



| Model | Pan Size | BTU |
|------------------|----------|---------|
| FG-PSBR-BS10-NGK | 10" | 80,000 |
| FG-PSBR-BS14-NGK | 14" | 125,000 |
| FG-PSBR-BS10-LPK | 10" | 95,000 |
| FG-PSBR-BS14-LPK | 14" | 160,000 |

H Burner » Burner Only



| Model | Size | BTU |
|----------------|-------------|---------|
| FG-PSBR-H24-NG | 24" x 6.75" | 80,000 |
| FG-PSBR-H30-NG | 30" x 6.75" | 95,000 |
| FG-PSBR-H40-NG | 40" x 6.75" | 120,000 |
| FG-PSBR-H50-NG | 50" x 6.75" | 160,000 |
| FG-PSBR-H60-NG | 60" x 6.75" | 180,000 |
| FG-PSBR-H80-NG | 80" x 6.75" | 250,000 |
| FG-PSBR-H24-LP | 24" x 6.75" | 110,000 |
| FG-PSBR-H30-LP | 30" x 6.75" | 115,000 |
| FG-PSBR-H40-LP | 40" x 6.75" | 150,000 |
| FG-PSBR-H50-LP | 50" x 6.75" | 175,000 |
| FG-PSBR-H60-LP | 60" x 6.75" | 200,000 |
| FG-PSBR-H80-LP | 80" x 6.75" | 240,000 |

H Burner » Burner Kit



| Model | Pan Size | BTU |
|-----------------|-------------|---------|
| FG-PSBR-H24-NGK | 24" x 6.75" | 80,000 |
| FG-PSBR-H30-NGK | 30" x 6.75" | 95,000 |
| FG-PSBR-H40-NGK | 40" x 6.75" | 120,000 |
| FG-PSBR-H50-NGK | 50" x 6.75" | 160,000 |
| FG-PSBR-H60-NGK | 60" x 6.75" | 180,000 |
| FG-PSBR-H80-NGK | 80" x 6.75" | 250,000 |
| FG-PSBR-H24-LPK | 24" x 6.75" | 110,000 |
| FG-PSBR-H30-LPK | 30" x 6.75" | 115,000 |
| FG-PSBR-H40-LPK | 40" x 6.75" | 150,000 |
| FG-PSBR-H50-LPK | 50" x 6.75" | 175,000 |
| FG-PSBR-H60-LPK | 60" x 6.75" | 200,000 |
| FG-PSBR-H80-LPK | 80" x 6.75" | 240,000 |

T Burner » Burner Only



| Model | Size | BTU |
|----------------|------|---------|
| FG-PSBR-T24-NG | 24" | 50,000 |
| FG-PSBR-T38-NG | 38" | 90,000 |
| FG-PSBR-T44-NG | 44" | 100,000 |
| FG-PSBR-T56-NG | 56" | 135,000 |
| FG-PSBR-T68-NG | 68" | 140,000 |
| FG-PSBR-T86-NG | 86" | 145,000 |
| FG-PSBR-T90-NG | 90" | 165,000 |
| FG-PSBR-T24-LP | 24" | 60,000 |
| FG-PSBR-T38-LP | 38" | 95,000 |
| FG-PSBR-T44-LP | 44" | 110,000 |
| FG-PSBR-T56-LP | 56" | 140,000 |
| FG-PSBR-T68-LP | 68" | 170,000 |
| FG-PSBR-T86-LP | 86" | 215,000 |
| FG-PSBR-T90-LP | 90" | 225,000 |

T Burner » Burner Kit




| Model | Pan Size | BTU |
|-----------------|----------|---------|
| FG-PSBR-T24-NGK | 24" | 50,000 |
| FG-PSBR-T38-NGK | 38" | 90,000 |
| FG-PSBR-T44-NGK | 44" | 100,000 |
| FG-PSBR-T56-NGK | 56" | 135,000 |
| FG-PSBR-T68-NGK | 68" | 140,000 |
| FG-PSBR-T86-NGK | 86" | 145,000 |
| FG-PSBR-T90-NGK | 90" | 165,000 |
| FG-PSBR-T24-LPK | 24" | 60,000 |
| FG-PSBR-T38-LPK | 38" | 95,000 |
| FG-PSBR-T44-LPK | 44" | 110,000 |
| FG-PSBR-T56-LPK | 56" | 140,000 |
| FG-PSBR-T68-LPK | 68" | 170,000 |
| FG-PSBR-T86-LPK | 86" | 215,000 |
| FG-PSBR-T90-LPK | 90" | 225,000 |

STAINLESS STEEL BURNERS

BURNERS & BURNER KITS

All Stainless Steel Burners & Burner Kits ship as Natural Gas

Burning Spur » Burner Only



| Model | Size | BTU |
|--------|------|---------|
| DBS-12 | 12" | 50,000 |
| DBS-16 | 16" | 75,000 |
| DBS-22 | 22" | 125,000 |
| DBS-31 | 31" | 175,000 |
| DBS-36 | 36" | 250,000 |

Burning Spur » Burner Kit



| Model | Pan Size | BTU |
|---------|----------|---------|
| DBS-12K | 12" | 50,000 |
| DBS-16K | 16" | 75,000 |
| DBS-22K | 22" | 125,000 |
| DBS-31K | 31" | 175,000 |
| DBS-36K | 36" | 250,000 |

Fire Ring » Burner Only



WHILE SUPPLIES LAST!

| Model | Size | BTU |
|------------|------|---------|
| FG-FR-18SS | 18" | 75,000 |
| FG-FR-24SS | 24" | 125,000 |
| FG-FR-30SS | 30" | 250,000 |
| FG-FR-36SS | 36" | 250,000 |
| FG-FR-48SS | 48" | 250,000 |

Fire Ring » Burner Kit



WHILE SUPPLIES LAST!

| Model | Pan Size | BTU |
|-------------|----------|---------|
| FG-FR-18SSK | 18" | 75,000 |
| FG-FR-24SSK | 24" | 125,000 |
| FG-FR-30SSK | 30" | 250,000 |
| FG-FR-36SSK | 36" | 250,000 |
| FG-FR-48SSK | 48" | 250,000 |

H Burner » Burner Only



| Model | Size | BTU |
|-------------|-----------|---------|
| FG-H-2110SS | 21" x 10" | 75,000 |
| FG-H-2406SS | 24" x 6" | 75,000 |
| FG-H-2710SS | 27" x 10" | 100,000 |
| FG-H-3006SS | 30" x 6" | 100,000 |
| FG-H-3310SS | 33" x 10" | 125,000 |
| FG-H-3606SS | 36" x 6" | 125,000 |
| FG-H-4510SS | 45" x 10" | 150,000 |
| FG-H-4806SS | 48" x 6" | 175,000 |
| FG-H-5710SS | 57" x 10" | 175,000 |
| FG-H-6910SS | 69" x 10" | 200,000 |
| FG-H-8110SS | 81" x 10" | 225,000 |
| FG-H-9310SS | 93" x 10" | 250,000 |

H Burner » Burner Kit



| Model | Pan Size | BTU |
|--------------|-----------|---------|
| FG-H-2110SSK | 21" x 10" | 75,000 |
| FG-H-2406SSK | 24" x 6" | 75,000 |
| FG-H-2710SSK | 27" x 10" | 100,000 |
| FG-H-3006SSK | 30" x 6" | 100,000 |
| FG-H-3310SSK | 33" x 10" | 125,000 |
| FG-H-3606SSK | 36" x 6" | 125,000 |
| FG-H-4510SSK | 45" x 10" | 150,000 |
| FG-H-4806SSK | 48" x 6" | 175,000 |
| FG-H-5710SSK | 57" x 10" | 175,000 |
| FG-H-6910SSK | 69" x 10" | 200,000 |
| FG-H-8110SSK | 81" x 10" | 225,000 |
| FG-H-9310SSK | 93" x 10" | 250,000 |

T Burner » Burner Only



| Model | Size | BTU |
|-----------|------|---------|
| FG-T-21SS | 21" | 50,000 |
| FG-T-27SS | 27" | 50,000 |
| FG-T-33SS | 33" | 75,000 |
| FG-T-45SS | 45" | 100,000 |
| FG-T-57SS | 57" | 125,000 |
| FG-T-69SS | 69" | 150,000 |
| FG-T-81SS | 81" | 175,000 |
| FG-T-93SS | 93" | 200,000 |

T Burner » Burner Kit



| Model | Pan Size | BTU |
|------------|----------|---------|
| FG-T-21SSK | 21" | 50,000 |
| FG-T-27SSK | 27" | 50,000 |
| FG-T-33SSK | 33" | 75,000 |
| FG-T-45SSK | 45" | 100,000 |
| FG-T-57SSK | 57" | 125,000 |
| FG-T-69SSK | 69" | 150,000 |
| FG-T-81SSK | 81" | 175,000 |
| FG-T-93SSK | 93" | 200,000 |

PRO SERIES ROUND

BURNER SYSTEMS

Each Pro Series Burner System is designed to be Natural Gas or Propane from the Factory

Firegear does **NOT** offer Gas Conversion Kits for Pro Series Burner Systems

Round » Snowflake » Drop-In » AWS



Image Shown
PB-33RPSSF25AWS-N

| Model | Pan Size | BTU |
|--------------------|----------|---------|
| FPB-19RPSSF11AWS-N | 19" | 50,000 |
| FPB-25RPSSF18AWS-N | 25" | 145,000 |
| FPB-29RPSSF18AWS-N | 29" | 145,000 |
| FPB-33RPSSF25AWS-N | 33" | 260,000 |
| FPB-19RPSSF11AWS-P | 19" | 42,000 |
| FPB-25RPSSF18AWS-P | 25" | 124,000 |
| FPB-29RPSSF18AWS-P | 29" | 124,000 |
| FPB-33RPSSF25AWS-P | 33" | 240,000 |

Round » Snowflake » Flat » AWS




Image Shown
FPB-34DPSSF25AWS-N

| Model | Pan Size | BTU |
|--------------------|----------|---------|
| FPB-26DPSSF18AWS-N | 26" | 145,000 |
| FPB-29DPSSF18AWS-N | 29" | 145,000 |
| FPB-34DPSSF25AWS-N | 34" | 260,000 |
| FPB-39DPSSF32AWS-N | 39" | 426,000 |
| FPB-44DPSSF32AWS-N | 44" | 426,000 |
| FPB-26DPSSF18AWS-P | 26" | 124,000 |
| FPB-29DPSSF18AWS-P | 29" | 124,000 |
| FPB-34DPSSF25AWS-P | 34" | 240,000 |
| FPB-39DPSSF32AWS-P | 39" | 402,000 |
| FPB-44DPSSF32AWS-P | 44" | 402,000 |

Round » Snowflake » Drop-In » TPSI



Image Shown
FPB-29RPSSF18TPSI-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-19RPSSF11TPSI-N | 19" | 50,000 |
| FPB-25RPSSF18TPSI-N | 25" | 145,000 |
| FPB-29RPSSF18TPSI-N | 29" | 145,000 |
| FPB-19RPSSF11TPSI-P | 19" | 42,000 |
| FPB-25RPSSF18TPSI-P | 25" | 124,000 |
| FPB-29RPSSF18TPSI-P | 29" | 124,000 |

Round » Snowflake » Flat » TPSI




Image Shown
FPB-29DPSSF18TPSI-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-26DPSSF18TPSI-N | 26" | 145,000 |
| FPB-29DPSSF18TPSI-N | 29" | 145,000 |
| FPB-26DPSSF18TPSI-P | 26" | 124,000 |
| FPB-29DPSSF18TPSI-P | 29" | 124,000 |

Round » Snowflake » Drop-In » MT



Image Shown
FPB-33RPSSF25MT-N

| Model | Pan Size | BTU |
|-------------------|----------|---------|
| FPB-19RPSSF11MT-N | 19" | 50,000 |
| FPB-25RPSSF18MT-N | 25" | 145,000 |
| FPB-29RPSSF18MT-N | 29" | 145,000 |
| FPB-33RPSSF25MT-N | 33" | 260,000 |
| FPB-19RPSSF11MT-P | 19" | 42,000 |
| FPB-25RPSSF18MT-P | 25" | 124,000 |
| FPB-29RPSSF18MT-P | 29" | 124,000 |
| FPB-33RPSSF25MT-P | 33" | 240,000 |

Round » Snowflake » Flat » MT



Image Shown
FPB-34DPSSF25MT-N

| Model | Pan Size | BTU |
|-------------------|----------|---------|
| FPB-26DPSSF18MT-N | 26" | 145,000 |
| FPB-29DPSSF18MT-N | 29" | 145,000 |
| FPB-34DPSSF25MT-N | 34" | 260,000 |
| FPB-39DPSSF32MT-N | 39" | 426,000 |
| FPB-44DPSSF32MT-N | 44" | 426,000 |
| FPB-26DPSSF18MT-P | 26" | 124,000 |
| FPB-29DPSSF18MT-P | 29" | 124,000 |
| FPB-34DPSSF25MT-P | 34" | 240,000 |
| FPB-39DPSSF32MT-P | 39" | 402,000 |
| FPB-44DPSSF32MT-P | 44" | 402,000 |

Round » Spur » Drop-In » AWS



Image Shown
FPB-19RPSBR14AWS-N

| Model | Pan Size | BTU |
|--------------------|----------|---------|
| FPB-19RPSBR14AWS-N | 19" | 125,000 |
| FPB-19RPSBR14AWS-P | 19" | 160,000 |

Round » Spur » Drop-In » TPSI



Image Shown
FPB-19RPSBR14TPSI-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-19RPSBR14TPSI-N | 19" | 125,000 |
| FPB-19RPSBR14TPSI-P | 19" | 160,000 |

Round » Spur » Drop-In » MT



Image Shown
FPB-19RPSBR14MT-N

| Model | Pan Size | BTU |
|-------------------|----------|---------|
| FPB-19RPSBR14MT-N | 19" | 125,000 |
| FPB-19RPSBR14MT-P | 19" | 160,000 |

PRO SERIES SQUARE

BURNER SYSTEMS

Each Pro Series Burner System is designed to be Natural Gas or Propane from the Factory

Firegear does **NOT** offer Gas Conversion Kits for Pro Series Burner Systems

Square » Snowflake » Drop-In » AWS



Image Shown
FPB-32SPSSF25AWS-N

| Model | Pan Size | BTU |
|--------------------|----------|---------|
| FPB-20SPSSF11AWS-N | 20" | 50,000 |
| FPB-26SPSSF18AWS-N | 26" | 145,000 |
| FPB-32SPSSF25AWS-N | 32" | 260,000 |
| FPB-38SPSSF32AWS-N | 38" | 426,000 |
| FPB-20SPSSF11AWS-P | 20" | 42,000 |
| FPB-26SPSSF18AWS-P | 26" | 124,000 |
| FPB-32SPSSF25AWS-P | 32" | 240,000 |
| FPB-38SPSSF32AWS-P | 38" | 402,000 |

Square » Snowflake » Flat » AWS



Image Shown
FPB-34SFPSSF25AWS-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-25SFPSSF18AWS-N | 25" | 145,000 |
| FPB-30SFPSSF25AWS-N | 30" | 260,000 |
| FPB-34SFPSSF25AWS-N | 34" | 260,000 |
| FPB-46SFPSSF32AWS-N | 46" | 426,000 |
| FPB-25SFPSSF18AWS-P | 25" | 124,000 |
| FPB-30SFPSSF25AWS-P | 30" | 240,000 |
| FPB-34SFPSSF25AWS-P | 34" | 240,000 |
| FPB-46SFPSSF32AWS-P | 46" | 402,000 |

Square » Snowflake » Drop-In » TPSI




Image Shown
FPB-26SPSSF18TPSI-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-20SPSSF11TPSI-N | 20" | 50,000 |
| FPB-26SPSSF18TPSI-N | 26" | 145,000 |
| FPB-20SPSSF11TPSI-P | 20" | 42,000 |
| FPB-26SPSSF18TPSI-P | 26" | 124,000 |

Square » Snowflake » Flat » TPSI




Image Shown
FPB-25SFPSSF18TPSI-N

| Model | Pan Size | BTU |
|----------------------|----------|---------|
| FPB-25SFPSSF18TPSI-N | 25" | 145,000 |
| FPB-25SFPSSF18TPSI-P | 25" | 124,000 |

Square » Snowflake » Drop-In » MT



Image Shown
FPB-32SPSSF25MT-N

| Model | Pan Size | BTU |
|-------------------|----------|---------|
| FPB-20SPSSF11MT-N | 20" | 50,000 |
| FPB-26SPSSF18MT-N | 26" | 145,000 |
| FPB-32SPSSF25MT-N | 32" | 260,000 |
| FPB-38SPSSF32MT-N | 38" | 426,000 |
| FPB-20SPSSF11MT-P | 20" | 42,000 |
| FPB-26SPSSF18MT-P | 26" | 124,000 |
| FPB-32SPSSF25MT-P | 32" | 240,000 |
| FPB-38SPSSF32MT-P | 38" | 402,000 |

Square » Snowflake » Flat » MT




Image Shown
FPB-34SFPSSF25MT-N

| Model | Pan Size | BTU |
|--------------------|----------|---------|
| FPB-25SFPSSF18MT-N | 25" | 145,000 |
| FPB-30SFPSSF25MT-N | 30" | 260,000 |
| FPB-34SFPSSF25MT-N | 34" | 260,000 |
| FPB-46SFPSSF32MT-N | 46" | 426,000 |
| FPB-25SFPSSF18MT-P | 25" | 145,000 |
| FPB-30SFPSSF25MT-P | 30" | 260,000 |
| FPB-34SFPSSF25MT-P | 34" | 260,000 |
| FPB-46SFPSSF32MT-P | 46" | 402,000 |

Square » Spur » Drop-In » AWS



Image Shown
FPB-20SPSBR14AWS-N

| Model | Pan Size | BTU |
|--------------------|----------|---------|
| FPB-20SPSBR14AWS-N | 20" | 125,000 |
| FPB-20SPSBR14AWS-P | 20" | 160,000 |

Square » Spur » Drop-In » TPSI




Image Shown
FPB-20SPSBR14TPSI-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-20SPSBR14TPSI-N | 20" | 125,000 |
| FPB-20SPSBR14TPSI-P | 20" | 160,000 |

Square » Spur » Drop-In » MT




Image Shown
FPB-20SPSBR14MT-N

| Model | Pan Size | BTU |
|-------------------|----------|---------|
| FPB-20SPSBR14MT-N | 20" | 125,000 |
| FPB-20SPSBR14MT-P | 20" | 160,000 |

PRO SERIES LINEAR

BURNER SYSTEMS

Linear » H Burner » Flat » AWS



| Model | Pan Size | BTU |
|--------------------|-----------|---------|
| LOF-3010PS246AWS-N | 30" x 10" | 80,000 |
| LOF-3610PS306AWS-N | 36" x 10" | 95,000 |
| LOF-4810PS406AWS-N | 48" x 10" | 120,000 |
| LOF-6010PS506AWS-N | 60" x 10" | 160,000 |
| LOF-7210PS606AWS-N | 72" x 10" | 180,000 |
| LOF-9610PS806AWS-N | 96" x 10" | 250,000 |
| LOF-3010PS246AWS-P | 30" x 10" | 110,000 |
| LOF-3610PS306AWS-P | 36" x 10" | 115,000 |
| LOF-4810PS406AWS-P | 48" x 10" | 150,000 |
| LOF-6010PS506AWS-P | 60" x 10" | 175,000 |
| LOF-7210PS606AWS-P | 72" x 10" | 200,000 |
| LOF-9610PS806AWS-P | 96" x 10" | 240,000 |

Linear » H Burner » Flat » TPSI



| Model | Pan Size | BTU |
|---------------------|-----------|---------|
| LOF-3010PS246TPSI-N | 30" x 10" | 80,000 |
| LOF-3610PS306TPSI-N | 36" x 10" | 95,000 |
| LOF-4810PS406TPSI-N | 48" x 10" | 120,000 |
| LOF-6010PS506TPSI-N | 60" x 10" | 160,000 |
| LOF-3010PS246TPSI-P | 30" x 10" | 110,000 |
| LOF-3610PS306TPSI-P | 36" x 10" | 115,000 |
| LOF-4810PS406TPSI-P | 48" x 10" | 150,000 |
| LOF-6010PS506TPSI-P | 60" x 10" | 175,000 |

Linear » H Burner » Flat » MT



| Model | Pan Size | BTU |
|-------------------|-----------|---------|
| LOF-3010PS246MT-N | 30" x 10" | 80,000 |
| LOF-3610PS306MT-N | 36" x 10" | 95,000 |
| LOF-4810PS406MT-N | 48" x 10" | 120,000 |
| LOF-6010PS506MT-N | 60" x 10" | 160,000 |
| LOF-7210PS606MT-N | 72" x 10" | 180,000 |
| LOF-9610PS806MT-N | 96" x 10" | 250,000 |
| LOF-3010PS246MT-P | 30" x 10" | 110,000 |
| LOF-3610PS306MT-P | 36" x 10" | 115,000 |
| LOF-4810PS406MT-P | 48" x 10" | 150,000 |
| LOF-6010PS506MT-P | 60" x 10" | 175,000 |
| LOF-7210PS606MT-P | 72" x 10" | 200,000 |
| LOF-9610PS806MT-P | 96" x 10" | 240,000 |

Want to see the
PRO SERIES BURNER
in **ACTION?**

Scan the QR code below to watch the video
about the Pro Series Burner System!



FG-PSBR-SF32-NG | Showing how the Pro Series burns

PRO SERIES LINEAR

BURNER SYSTEMS

Linear » T Burner » Drop-In » AWS



| Model | Pan Size | BTU |
|--------------------|----------|---------|
| LOF-3006PS24TAWS-N | 30" x 6" | 50,000 |
| LOF-4206PS38TAWS-N | 42" x 6" | 90,000 |
| LOF-4806PS44TAWS-N | 48" x 6" | 100,000 |
| LOF-6006PS56TAWS-N | 60" x 6" | 135,000 |
| LOF-7206PS68TAWS-N | 72" x 6" | 140,000 |
| LOF-3006PS24TAWS-P | 30" x 6" | 60,000 |
| LOF-4206PS38TAWS-P | 42" x 6" | 95,000 |
| LOF-4806PS44TAWS-P | 48" x 6" | 110,000 |
| LOF-6006PS56TAWS-P | 60" x 6" | 140,000 |
| LOF-7206PS68TAWS-P | 72" x 6" | 170,000 |

Linear » T Burner » Flat » AWS



| Model | Pan Size | BTU |
|---------------------|----------|---------|
| LOF-3008FPS24TAWS-N | 30" x 8" | 50,000 |
| LOF-4208FPS38TAWS-N | 42" x 8" | 90,000 |
| LOF-4808FPS44TAWS-N | 48" x 8" | 100,000 |
| LOF-6008FPS56TAWS-N | 60" x 8" | 135,000 |
| LOF-7208FPS68TAWS-N | 72" x 8" | 140,000 |
| LOF-3008FPS24TAWS-P | 30" x 8" | 60,000 |
| LOF-4208FPS38TAWS-P | 42" x 8" | 95,000 |
| LOF-4808FPS44TAWS-P | 48" x 8" | 110,000 |
| LOF-6008FPS56TAWS-P | 60" x 8" | 140,000 |
| LOF-7208FPS68TAWS-P | 72" x 8" | 170,000 |

Linear » T Burner » Drop-In » TPSI



| Model | Pan Size | BTU |
|---------------------|----------|---------|
| LOF-3006PS24TTPSI-N | 30" x 6" | 50,000 |
| LOF-4206PS38TTPSI-N | 42" x 6" | 90,000 |
| LOF-4806PS44TTPSI-N | 48" x 6" | 100,000 |
| LOF-6006PS56TTPSI-N | 60" x 6" | 135,000 |
| LOF-7206PS68TTPSI-N | 72" x 6" | 140,000 |
| LOF-3006PS24TTPSI-P | 30" x 6" | 60,000 |
| LOF-4206PS38TTPSI-P | 42" x 6" | 95,000 |
| LOF-4806PS44TTPSI-P | 48" x 6" | 110,000 |
| LOF-6006PS56TTPSI-P | 60" x 6" | 140,000 |
| LOF-7206PS68TTPSI-P | 72" x 6" | 170,000 |

Linear » T Burner » Flat » TPSI



| Model | Pan Size | BTU |
|----------------------|----------|---------|
| LOF-3008FPS24TTPSI-N | 30" x 8" | 50,000 |
| LOF-4208FPS38TTPSI-N | 42" x 8" | 90,000 |
| LOF-4808FPS44TTPSI-N | 48" x 8" | 100,000 |
| LOF-6008FPS56TTPSI-N | 60" x 8" | 135,000 |
| LOF-7208FPS68TTPSI-N | 72" x 8" | 140,000 |
| LOF-3008FPS24TTPSI-P | 30" x 8" | 60,000 |
| LOF-4208FPS38TTPSI-P | 42" x 8" | 95,000 |
| LOF-4808FPS44TTPSI-P | 48" x 8" | 110,000 |
| LOF-6008FPS56TTPSI-P | 60" x 8" | 140,000 |
| LOF-7208FPS68TTPSI-P | 72" x 8" | 170,000 |

Linear » T Burner » Drop-In » MT



| Model | Pan Size | BTU |
|-------------------|----------|---------|
| LOF-3006PS24TMT-N | 30" x 6" | 50,000 |
| LOF-4206PS38TMT-N | 42" x 6" | 90,000 |
| LOF-4806PS44TMT-N | 48" x 6" | 100,000 |
| LOF-6006PS56TMT-N | 60" x 6" | 135,000 |
| LOF-7206PS68TMT-N | 72" x 6" | 140,000 |
| LOF-3006PS24TMT-P | 30" x 6" | 60,000 |
| LOF-4206PS38TMT-P | 42" x 6" | 95,000 |
| LOF-4806PS44TMT-P | 48" x 6" | 110,000 |
| LOF-6006PS56TMT-P | 60" x 6" | 140,000 |
| LOF-7206PS68TMT-P | 72" x 6" | 170,000 |

Linear » T Burner » Flat » MT



| Model | Pan Size | BTU |
|--------------------|----------|---------|
| LOF-3008FPS24TMT-N | 30" x 8" | 50,000 |
| LOF-4208FPS38TMT-N | 42" x 8" | 90,000 |
| LOF-4808FPS44TMT-N | 48" x 8" | 100,000 |
| LOF-6008FPS56TMT-N | 60" x 8" | 135,000 |
| LOF-7208FPS68TMT-N | 72" x 8" | 140,000 |
| LOF-3008FPS24TMT-P | 30" x 8" | 60,000 |
| LOF-4208FPS38TMT-P | 42" x 8" | 95,000 |
| LOF-4808FPS44TMT-P | 48" x 8" | 110,000 |
| LOF-6008FPS56TMT-P | 60" x 8" | 140,000 |
| LOF-7208FPS68TMT-P | 72" x 8" | 170,000 |

STAINLESS STEEL ROUND

BURNER SYSTEMS

AWS & TPSI
 Natural Gas (N) or Propane (P) from the factory
MT
 Only sold as Natural Gas (N)
 Natural Gas to Propane Conversion Kits available

Round » Drop-In » AWS



Image Shown
 FPB-33RBSAWS-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-25RBSAWS-N or P | 25" | 125,000 |
| FPB-29RBSAWS-N or P | 29" | 125,000 |
| FPB-33RBSAWS-N or P | 33" | 175,000 |

Round » Flat » AWS



Image Shown
 FPB-39DBSAWS-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-26DBSAWS-N or P | 26" | 125,000 |
| FPB-29DBSAWS-N or P | 29" | 125,000 |
| FPB-34DBSAWS-N or P | 34" | 175,000 |
| FPB-39DBSAWS-N or P | 39" | 250,000 |
| FPB-44DBSAWS-N or P | 44" | 250,000 |

Round » Drop-In » TPSI



Image Shown
 FPB-33RBS31TPSI-N

| Model | Pan Size | BTU |
|------------------------|----------|---------|
| FPB-19RBS16TPSI-N or P | 19" | 75,000 |
| FPB-25RBS22TPSI-N or P | 25" | 125,000 |
| FPB-29RBS22TPSI-N or P | 29" | 125,000 |
| FPB-33RBS31TPSI-N or P | 33" | 150,000 |

Round » Flat » TPSI



Image Shown
 FPB-39DBS31TPSI-N

| Model | Pan Size | BTU |
|------------------------|----------|---------|
| FPB-26DBS22TPSI-N or P | 26" | 125,000 |
| FPB-29DBS22TPSI-N or P | 29" | 125,000 |
| FPB-34DBS31TPSI-N or P | 34" | 150,000 |
| FPB-39DBS31TPSI-N or P | 39" | 150,000 |

Round » Drop-In » MT



Image Shown
 FPB-33RBS31MT-N

| Model | Pan Size | BTU |
|-----------------|----------|---------|
| FPB-19RBSMT-N | 19" | 75,000 |
| FPB-25RBS22MT-N | 25" | 125,000 |
| FPB-29RBS22MT-N | 29" | 125,000 |
| FPB-33RBS31MT-N | 33" | 175,000 |

Round » Flat » MT



Image Shown
 FPB-39DBS36MT-N

| Model | Pan Size | BTU |
|-----------------|----------|---------|
| FPB-26DBS22MT-N | 26" | 125,000 |
| FPB-29DBS22MT-N | 29" | 125,000 |
| FPB-34DBS31MT-N | 34" | 175,000 |
| FPB-39DBS36MT-N | 39" | 250,000 |
| FPB-44DBS36MT-N | 44" | 250,000 |



FPB-44DBS36MT-N | Round Flat Match Throw Burner System
 inside a custom brick surround

STAINLESS STEEL SQUARE

BURNER SYSTEMS

AWS & TPSI
 Natural Gas (N) or Propane (P) from the factory
MT
 Only sold as Natural Gas (N)
 Natural Gas to Propane Conversion Kits available

Square » Drop-In » AWS



Image Shown
 FPB-38SBSAWS-N

| Model | Pan Size | BTU |
|---------------------|----------|---------|
| FPB-20SBSAWS-N or P | 20" | 75,000 |
| FPB-26SBSAWS-N or P | 26" | 125,000 |
| FPB-32SBSAWS-N or P | 32" | 175,000 |
| FPB-38SBSAWS-N or P | 38" | 250,000 |

Square » Flat » AWS



Image Shown
 FPB-34SFBSAWS-N

| Model | Pan Size | BTU |
|----------------------|----------|---------|
| FPB-25SFBSAWS-N or P | 25" | 125,000 |
| FPB-30SFBSAWS-N or P | 30" | 125,000 |
| FPB-34SFBSAWS-N or P | 34" | 175,000 |
| FPB-46SFBSAWS-N or P | 46" | 250,000 |

Square » Drop-In » TPSI



Image Shown
 FPB-32SBS31TPSI-N

| Model | Pan Size | BTU |
|------------------------|----------|---------|
| FPB-20SBS16TPSI-N or P | 20" | 75,000 |
| FPB-26SBS22TPSI-N or P | 26" | 125,000 |
| FPB-32SBS31TPSI-N or P | 32" | 150,000 |

Square » Flat » TPSI



Image Shown
 FPB-34SFBS31TPSI-N

| Model | Pan Size | BTU |
|-------------------------|----------|---------|
| FPB-25SFBS22TPSI-N or P | 25" | 125,000 |
| FPB-30SFBS22TPSI-N or P | 30" | 125,000 |
| FPB-34SFBS31TPSI-N or P | 34" | 150,000 |

Square » Drop-In » MT



Image Shown
 FPB-38SBS36MT-N

| Model | Pan Size | BTU |
|-----------------|----------|---------|
| FPB-20SBSMT-N | 20" | 75,000 |
| FPB-26SBS22MT-N | 26" | 125,000 |
| FPB-32SBS31MT-N | 32" | 175,000 |
| FPB-38SBS36MT-N | 38" | 250,000 |

Square » Flat » MT



Image Shown
 FPB-46SFBS36MT-N

| Model | Pan Size | BTU |
|------------------|----------|---------|
| FPB-25SFBS22MT-N | 25" | 125,000 |
| FPB-30SFBS22MT-N | 30" | 125,000 |
| FPB-34SFBS31MT-N | 34" | 175,000 |
| FPB-46SFBS36MT-N | 46" | 250,000 |



Square Drop-In Match Throw Burner System | FPB-26SBS22MT-N
 resting on large pieces of slate.

STAINLESS STEEL

BURNER SYSTEMS

AWS & TPSI
 Natural Gas (N) or Propane (P) from the factory
MT
 Only sold as Natural Gas (N)
Natural Gas to Propane Conversion Kits available

Linear » H Burner » Drop-In » AWS



| Model | Pan Size | BTU |
|---------------------|-----------|---------|
| LOF-2412HAWS-N or P | 24" x 12" | 75,000 |
| LOF-3012HAWS-N or P | 30" x 12" | 100,000 |
| LOF-3614HAWS-N or P | 36" x 14" | 125,000 |
| LOF-4214HAWS-N or P | 42" x 14" | 150,000 |
| LOF-4814HAWS-N or P | 48" x 14" | 150,000 |
| LOF-6016HAWS-N or P | 60" x 16" | 175,000 |
| LOF-7216HAWS-N or P | 72" x 16" | 200,000 |
| LOF-8416HAWS-N or P | 84" x 16" | 225,000 |
| LOF-9616HAWS-N or P | 96" x 16" | 250,000 |

Linear » H Burner » Flat » AWS



| Model | Pan Size | BTU |
|----------------------|-----------|---------|
| LOF-2412FHAWS-N or P | 24" x 12" | 75,000 |
| LOF-3014FHAWS-N or P | 30" x 14" | 100,000 |
| LOF-3614FHAWS-N or P | 36" x 14" | 100,000 |
| LOF-4814FHAWS-N or P | 48" x 14" | 150,000 |
| LOF-6016FHAWS-N or P | 60" x 16" | 175,000 |
| LOF-7216FHAWS-N or P | 72" x 16" | 200,000 |
| LOF-8416FHAWS-N or P | 84" x 16" | 225,000 |
| LOF-9616FHAWS-N or P | 96" x 16" | 250,000 |

Linear » H Burner » Drop-In » TPSI



| Model | Pan Size | BTU |
|----------------------|-----------|---------|
| LOF-2412HTPSI-N or P | 24" x 12" | 75,000 |
| LOF-3012HTPSI-N or P | 30" x 12" | 75,000 |
| LOF-3614HTPSI-N or P | 36" x 14" | 125,000 |
| LOF-4214HTPSI-N or P | 42" x 14" | 125,000 |
| LOF-4814HTPSI-N or P | 48" x 14" | 150,000 |

Linear » H Burner » Flat » TPSI



| Model | Pan Size | BTU |
|-----------------------|-----------|---------|
| LOF-2412FHTPSI-N or P | 24" x 12" | 75,000 |
| LOF-3014FHTPSI-N or P | 30" x 14" | 75,000 |
| LOF-3614FHTPSI-N or P | 36" x 14" | 125,000 |
| LOF-4814FHTPSI-N or P | 48" x 14" | 150,000 |

Linear » H Burner » Drop-In » MT



| Model | Pan Size | BTU |
|---------------|-----------|---------|
| LOF-2412HMT-N | 24" x 12" | 75,000 |
| LOF-3012HMT-N | 30" x 12" | 100,000 |
| LOF-3614HMT-N | 36" x 14" | 125,000 |
| LOF-4214HMT-N | 42" x 14" | 125,000 |
| LOF-4814HMT-N | 48" x 14" | 150,000 |
| LOF-6016HMT-N | 60" x 16" | 175,000 |
| LOF-7216HMT-N | 72" x 16" | 200,000 |
| LOF-8416HMT-N | 84" x 16" | 225,000 |
| LOF-9616HMT-N | 96" x 16" | 250,000 |

Linear » H Burner » Flat » MT



| Model | Pan Size | BTU |
|----------------|-------------------|---------|
| LOF-2412FHMT-N | 24" x 12" | 75,000 |
| LOF-3014FHMT-N | 30" x 14" | 100,000 |
| LOF-3313FHMT-N | 32 3/4" x 12 3/4" | 100,000 |
| LOF-3614FHMT-N | 36" x 14" | 125,000 |
| LOF-4814FHMT-N | 48" x 14" | 150,000 |
| LOF-5113FHMT-N | 50 3/4" x 12 3/4" | 125,000 |
| LOF-6016FHMT-N | 60" x 16" | 175,000 |
| LOF-7216FHMT-N | 72" x 16" | 200,000 |
| LOF-8416FHMT-N | 84" x 16" | 225,000 |
| LOF-9616FHMT-N | 96" x 16" | 250,000 |

STAINLESS STEEL

BURNER SYSTEMS

AWS & TPSI
Natural Gas (N) or Propane (P) from the factory

MT
Only sold as Natural Gas (N)
Natural Gas to Propane Conversion Kits available

Linear » T Burner » Drop-In » AWS



| Model | Pan Size | BTU |
|---------------------|----------|---------|
| LOF-2406TAWS-N or P | 24" x 6" | 50,000 |
| LOF-3006TAWS-N or P | 30" x 6" | 50,000 |
| LOF-3606TAWS-N or P | 36" x 6" | 75,000 |
| LOF-4806TAWS-N or P | 48" x 6" | 100,000 |
| LOF-6006TAWS-N or P | 60" x 6" | 125,000 |
| LOF-7206TAWS-N or P | 72" x 6" | 150,000 |
| LOF-8406TAWS-N or P | 84" x 6" | 175,000 |
| LOF-9606TAWS-N or P | 96" x 6" | 200,000 |

Linear » T Burner » Flat » AWS



| Model | Pan Size | BTU |
|----------------------|----------|---------|
| LOF-2408FTAWS-N or P | 24" x 8" | 50,000 |
| LOF-3008FTAWS-N or P | 30" x 8" | 50,000 |
| LOF-3608FTAWS-N or P | 36" x 8" | 75,000 |
| LOF-4808FTAWS-N or P | 48" x 8" | 100,000 |
| LOF-6008FTAWS-N or P | 60" x 8" | 125,000 |
| LOF-7208FTAWS-N or P | 72" x 8" | 150,000 |
| LOF-8408FTAWS-N or P | 84" x 8" | 175,000 |
| LOF-9608FTAWS-N or P | 96" x 8" | 200,000 |

Linear » T Burner » Drop-In » TPSI



| Model | Pan Size | BTU |
|----------------------|----------|---------|
| LOF-2406TTPSI-N or P | 24" x 6" | 50,000 |
| LOF-3006TTPSI-N or P | 30" x 6" | 50,000 |
| LOF-3606TTPSI-N or P | 36" x 6" | 75,000 |
| LOF-4806TTPSI-N or P | 48" x 6" | 100,000 |
| LOF-6006TTPSI-N or P | 60" x 6" | 125,000 |
| LOF-7206TTPSI-N or P | 72" x 6" | 150,000 |

Linear » T Burner » Flat » TPSI



| Model | Pan Size | BTU |
|-----------------------|----------|---------|
| LOF-2408FTTPSI-N or P | 24" x 8" | 50,000 |
| LOF-3008FTTPSI-N or P | 30" x 8" | 50,000 |
| LOF-3608FTTPSI-N or P | 36" x 8" | 75,000 |
| LOF-4808FTTPSI-N or P | 48" x 8" | 100,000 |
| LOF-6008FTTPSI-N or P | 60" x 8" | 125,000 |
| LOF-7208FTTPSI-N or P | 72" x 8" | 150,000 |

Linear » T Burner » Drop-In » MT



| Model | Pan Size | BTU |
|---------------|----------|---------|
| LOF-2406TMT-N | 24" x 6" | 50,000 |
| LOF-3006TMT-N | 30" x 6" | 50,000 |
| LOF-3606TMT-N | 36" x 6" | 75,000 |
| LOF-4806TMT-N | 48" x 6" | 100,000 |
| LOF-6006TMT-N | 60" x 6" | 125,000 |
| LOF-7206TMT-N | 72" x 6" | 150,000 |
| LOF-8406TMT-N | 84" x 6" | 175,000 |
| LOF-9606TMT-N | 96" x 6" | 200,000 |

Linear » T Burner » Flat » MT



| Model | Pan Size | BTU |
|----------------|----------|---------|
| LOF-2408FTMT-N | 24" x 8" | 50,000 |
| LOF-3008FTMT-N | 30" x 8" | 50,000 |
| LOF-3608FTMT-N | 36" x 8" | 75,000 |
| LOF-4808FTMT-N | 48" x 8" | 100,000 |
| LOF-6008FTMT-N | 60" x 8" | 125,000 |
| LOF-7208FTMT-N | 72" x 8" | 150,000 |
| LOF-8408FTMT-N | 84" x 8" | 175,000 |
| LOF-9608FTMT-N | 96" x 8" | 200,000 |

PRO SERIES SRW/PAVER KITS ALL-IN-ONE SOLUTION

One model number - each package provides the all-in-one solution for upgrading to a gas fire pit.

All models are sold as Natural Gas or Liquid Propane from the factory.

Round >> Flat >> TPSI PRO SERIES SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | Gas |
|---------------------|------------|---------------------|---------------|---------------|--------------|------------|-----|
| FPB-29DPS18TPSIN-PK | 29" to 33" | FPB-29DPSSF18TPSI-N | FLEXFRAME-SS3 | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-40 | NG |
| FPB-29DPS18TPSIP-PK | 29" to 33" | FPB-29DPSSF18TPSI-P | FLEXFRAME-SS3 | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-40 | LP |

Round >> Flat >> MT PRO SERIES SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | Gas |
|--------------------|------------|-------------------|---------------|---------------|--------------|-------------------------|-----|
| FPB-26DPS18MTN-PK | 26" to 29" | FPB-26DPSSF18MT-N | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x3) | NG |
| FPB-29DPS18MTN-PK | 29" to 33" | FPB-29DPSSF18MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 | NG |
| FPB-29DPS18MTN-PK6 | 29" to 33" | FPB-29DPSSF18MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-6 | FG-LAVA-40 | NG |
| FPB-34DPS25MTN-PK | 34" to 39" | FPB-34DPSSF25MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | NG |
| FPB-34DPS25MTN-PK6 | 34" to 39" | FPB-34DPSSF25MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-6 | FG-LAVA-40 + FG-LAVA-10 | NG |
| FPB-39DPS32MTN-PK | 39" to 42" | FPB-39DPSSF32MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | NG |
| FPB-39DPS32MTN-PK6 | 39" to 42" | FPB-39DPSSF32MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-6 | FG-LAVA-40 + FG-LAVA-10 | NG |
| FPB-26DPS18MTP-PK | 26" to 29" | FPB-26DPSSF18MT-P | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x3) | LP |
| FPB-29DPS18MTP-PK | 29" to 33" | FPB-29DPSSF18MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 | LP |
| FPB-29DPS18MTP-PK6 | 29" to 33" | FPB-29DPSSF18MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-6 | FG-LAVA-40 | LP |
| FPB-34DPS25MTP-PK | 34" to 39" | FPB-34DPSSF25MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | LP |
| FPB-34DPS25MTP-PK6 | 34" to 39" | FPB-34DPSSF25MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-6 | FG-LAVA-40 + FG-LAVA-10 | LP |
| FPB-39DPS32MTP-PK | 39" to 42" | FPB-39DPSSF32MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | LP |
| FPB-39DPS32MTP-PK6 | 39" to 42" | FPB-39DPSSF32MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-6 | FG-LAVA-40 + FG-LAVA-10 | LP |

Square >> Flat >> TPSI PRO SERIES SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | Gas |
|----------------------|------------|---------------------|--------------|---------------|--------------|-----------------|-----|
| FPB-25SFPS18TPSIN-PK | 25" to 30" | FPB-25SFPSF18TPSI-N | FLEXFRAME-SS | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-10 (x3) | NG |
| FPB-25SFPS18TPSIP-PK | 25" to 30" | FPB-25SFPSF18TPSI-P | FLEXFRAME-SS | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-10 (x3) | LP |

Square >> Flat >> MT PRO SERIES SRW/PAVER KITS




| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | Gas |
|--------------------|------------|-------------------|---------------|---------------|--------------|-------------------------|-----|
| FPB-25SFPS18MTN-PK | 25" to 30" | FPB-25SFPSF18MT-N | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x3) | NG |
| FPB-30SFPS25MTN-PK | 30" to 35" | FPB-30SFPSF25MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 | NG |
| FPB-34SFPS25MTN-PK | 34" to 39" | FPB-34SFPSF25MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | NG |
| FPB-25SFPS18MTP-PK | 25" to 30" | FPB-25SFPSF18MT-P | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x3) | LP |
| FPB-30SFPS25MTP-PK | 30" to 35" | FPB-30SFPSF25MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 | LP |
| FPB-34SFPS25MTP-PK | 34" to 39" | FPB-34SFPSF25MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | LP |

Square » Drop-In » MT PRO SERIES SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | Gas |
|-------------------|------------|-------------------|--------------|---------------|--------------|-----------------|-----|
| FPB-20SPS14MTN-PK | 20" to 25" | FPB-20SPSBR14MT-N | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x2) | NG |
| FPB-20SPS14MTP-PK | 20" to 25" | FPB-20SPSBR14MT-P | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x2) | LP |

Linear » Flat » TPSI PRO SERIES SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | Gas |
|-----------------------|----------------------------|-------------------|---------------|---------------|--------------|------------------------------|-----|
| LOF-3010PS246TPSIN-PK | 30" to 35" L, 10" to 15" W | LOF-3010PS246MT-N | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | LAVA-10 (x3) | NG |
| LOF-3610PS306TPSIN-PK | 36" to 41" L, 10" to 15" W | LOF-3610PS306MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | LAVA-40 | NG |
| LOF-4810PS406TPSIN-PK | 48" to 53" L, 10" to 15" W | LOF-4810PS406MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | NG |
| LOF-3010PS246TPSIP-PK | 30" to 35" L, 10" to 15" W | LOF-6010PS506MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 (x2) | NG |
| LOF-3610PS306TPSIP-PK | 36" to 41" L, 10" to 15" W | LOF-3010PS246MT-P | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | LAVA-10 (x3) | LP |
| LOF-4810PS406TPSIP-PK | 48" to 53" L, 10" to 15" W | LOF-3010PS246MT-P | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | LAVA-10 (x3) | LP |

Linear » Flat » MT PRO SERIES SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | Gas |
|---------------------|----------------------------|-------------------|---------------|---------------|--------------|-------------------|-----|
| LOF-3010PS246MTN-PK | 30" to 35" L, 10" to 15" W | LOF-3010PS246MT-N | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | LAVA-10 (x3) | NG |
| LOF-3610PS306MTN-PK | 36" to 41" L, 10" to 15" W | LOF-3610PS306MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | LAVA-40 | NG |
| LOF-4810PS406MTN-PK | 48" to 53" L, 10" to 15" W | LOF-4810PS406MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | LAVA-40 + 10 | NG |
| LOF-6010PS506MTN-PK | 60" to 65" L, 10" to 15" W | LOF-6010PS506MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | LAVA-40 + 10 (x2) | NG |
| LOF-3010PS246MTP-PK | 30" to 35" L, 10" to 15" W | LOF-3010PS246MT-P | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | LAVA-10 (x3) | LP |
| LOF-3610PS306MTP-PK | 36" to 41" L, 10" to 15" W | LOF-3610PS306MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | LAVA-40 | LP |
| LOF-4810PS406MTP-PK | 48" to 53" L, 10" to 15" W | LOF-4810PS406MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | LAVA-40 + 10 | LP |
| LOF-6010PS506MTP-PK | 60" to 65" L, 10" to 15" W | LOF-6010PS506MT-P | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | LAVA-40 + 10 (x2) | LP |

STAINLESS STEEL SRW/PAVER KITS ALL-IN-ONE SOLUTION

One model number - each package provides the all-in-one solution for upgrading to a gas fire pit.

All models are sold as Natural Gas. You can purchase a NG to LP Conversion Kit.

Round » Flat » TPSI STAINLESS STEEL SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | LP Conv. Kit |
|-------------------|------------|-------------------|---------------|---------------|--------------|-------------------------|--------------|
| FPB-29D22TPSIN-PK | 29" to 32" | FPB-29DBS22TPSI-N | FLEXFRAME-SS3 | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-40 | OAS-LPK31 |
| FPB-34D31TPSIN-PK | 34" to 37" | FPB-34DBS31TPSI-N | FLEXFRAME-SS3 | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK26 |
| FPB-39D31TPSIN-PK | 39" to 42" | FPB-39DBS31TPSI-N | FLEXFRAME-SS3 | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK26 |

Round » Flat » MT STAINLESS STEEL SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | LP Conv. Kit |
|-------------------|------------|-----------------|---------------|---------------|--------------|------------------------------|--------------|
| FPB-26D22MTN-PK | 26" to 29" | FPB-26DBS22MT-N | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x3) | OAS-LPK31 |
| FPB-29D22MTN-PK | 29" to 32" | FPB-29DBS22MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 | OAS-LPK31 |
| FPB-34D31MTN-PK | 34" to 37" | FPB-34DBS31MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK26 |
| FPB-34D31MTN-PK2 | 34" to 37" | FPB-34DBS31MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-6 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK26 |
| FPB-39DBS36MTN-PK | 39" to 42" | FPB-39DBS36MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK12 |
| FPB-44DBS36MTN-PK | 44" to 47" | FPB-44DBS36MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 (x2) | OAS-LPK12 |

Square » Flat » TPSI STAINLESS STEEL SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | LP Conv. Kit |
|--------------------|------------|--------------------|---------------|---------------|--------------|-------------------------|--------------|
| FPB-25SF22TPSIN-PK | 25" to 28" | FPB-25SFBS22TPSI-N | FLEXFRAME-SS | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-10 (x3) | OAS-LPK31 |
| FPB-30SF22TPSIN-PK | 30" to 33" | FPB-30SFBS22TPSI-N | FLEXFRAME-SS3 | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-40 | OAS-LPK31 |
| FPB-34SF31TPSIN-PK | 34" to 37" | FPB-34SFBS31TPSI-N | FLEXFRAME-SS3 | PAVER-CP-TPSI | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK26 |

Square » Flat » MT STAINLESS STEEL SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | LP Conv. Kit |
|------------------|------------|------------------|---------------|---------------|--------------|-------------------------|--------------|
| FPB-25SF22MTN-PK | 25" to 28" | FPB-25SFBS22MT-N | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x3) | OAS-LPK31 |
| FPB-30SF22MTN-PK | 30" to 33" | FPB-30SFBS22MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 | OAS-LPK31 |
| FPB-34SF31MTN-PK | 34" to 37" | FPB-34SFBS31MT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK26 |

Square » Drop-In » MT STAINLESS STEEL SRW/PAVER KITS




| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | LP Conv. Kit |
|-------------------|------------|-----------------|--------------|---------------|--------------|-----------------|--------------|
| FPB-20SBS16MTN-PK | 20" to 23" | FPB-20SBS16MT-N | FLEXFRAME-SS | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-10 (x2) | OAS-LPK41 |

Linear » Flat » TPSI STAINLESS STEEL SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | LP Conv. Kit |
|--------------------|----------------------------|-------------------|--------------|----------------|--------------|------------|--------------|
| LOF-3014FHTPSIN-PK | 30" to 34" L, 14" to 18" W | LOF-3014FHT-PSI-N | FLEXFRAME-SS | PAVER-CP-TP-SI | PAVER-VENT-4 | FG-LAVA-40 | OAS-LPK35 |




| | | | | | | | |
|--------------------|----------------------------|-------------------|---------------|----------------|--------------|------------------------------|-----------|
| LOF-3614FHTPSIN-PK | 36" to 40" L, 14" to 18" W | LOF-3614FHT-PSI-N | FLEXFRAME-SS3 | PAVER-CP-TP-SI | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK31 |
| LOF-4814FHTPSIN-PK | 48" to 52" L, 14" to 18" W | LOF-4814FHT-PSI-N | FLEXFRAME-SS3 | PAVER-CP-TP-SI | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 (x2) | OAS-LPK29 |

Linear » Flat » MT STAINLESS STEEL SRW/PAVER KITS



| Model | Fits | Burner System | Flexframe | Control Panel | Vent Kit | Media | LP Conv. Kit |
|------------------|----------------------------|----------------|---------------|---------------|--------------|------------|--------------|
| LOF-3014FHMTN-PK | 30" to 34" L, 14" to 18" W | LOF-3014FHMT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 | OAS-LPK35 |




| | | | | | | | |
|------------------|----------------------------|----------------|---------------|-------------|--------------|------------------------------|-----------|
| LOF-3614FHMTN-PK | 36" to 40" L, 14" to 18" W | LOF-3614FHMT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 | OAS-LPK31 |
| LOF-4814FHMTN-PK | 48" to 52" L, 14" to 18" W | LOF-4814FHMT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 (x2) | OAS-LPK29 |
| LOF-6016FHMTN-PK | 60" to 64" L, 16" to 20" W | LOF-6016FHMT-N | FLEXFRAME-SS3 | PAVER-CP-MT | PAVER-VENT-4 | FG-LAVA-40 + FG-LAVA-10 (x3) | OAS-LPK26 |

SRW/PAVER FIRE PIT ACCESSORIES

FLEXFRAME » Bridge the gap!



Allows you the flexibility to fill the gap between the fire pit structure and the pan. You can easily remove the burner without disturbing the structure. Flexible and easy to adapt for round, square, and rectangular fire pits.



FLEXFRAME-PRO3

Pro Series - Wider Version of the FLEXFRAME. Designed for Larger Round, Square and Linear Burner Systems - Constructed of 16 Gauge 304 Stainless Steel

(3) 44" pieces per package



FLEXFRAME-SS3

Constructed of 16 Gauge 304 Stainless Steel. Engineered to protect against outdoor elements including salt water environments

(3) 44" pieces per package



FLEXFRAME-SS

Constructed of 16 Gauge 304 Stainless Steel. Engineered to protect against outdoor elements including salt water environments

(2) 44" pieces per package

SRW/PAVER VENT KITS



PAVER-VENT-4-LNTS

Stainless steel SRW vent kit with lintel. Each vent provides 18 square inches of ventilation.

INCLUDES >

Two (2) 3 5/8"H x 8"W vents with mounting plate, extension plate extends overall size up to 10"W

Two (2) Tapcon® concrete anchors and vent mounting hardware with spacers

Two (2) Lintels 12"L x 3"W (16 gauge galvanized steel)



PAVER-VENT-6-LNTS

Stainless steel SRW vent kit with lintel. Each vent provides 18 square inches of ventilation.

INCLUDES >

Two (2) 5 5/8"H x 8"W vents with mounting plate, extension plate extends overall size up to 10"W

Two (2) Tapcon® concrete anchors and vent mounting hardware with spacers


Two (2) Lintels 12"L x 3"W (16 gauge galvanized steel)

CONTROL PANELS



House the components of your burner system seamlessly within your SRW/Paver blocks.

Components of burner system are not included in the Control Panel Enclosure - they are located in the burner system or SRW/Paver Kit you purchased.



PAVER-CP-AWS

For use when building fire pit enclosures with SRW block and a AWS burner system.

INCLUDES >

SRW bracket kit and extender

Lintel - 12" L x 3" W

Screws and fittings

Tapcon® concrete anchors



PAVER-CP-TPSI

For use when building fire pit enclosures with SRW block and a TPSI burner system.

INCLUDES >

SRW bracket kit and extender

Lintel - 12" L x 3" W

Screws and fittings

Tapcon® concrete anchors



PAVER-CP-MT-MSI

For use when building fire pit enclosures with SRW block and a MT burner system.

INCLUDES >

SRW bracket kit and extender


Lintel - 12" L x 3" W

Battery operated piezo igniter

Ignition Hood

Screws and fittings

Tapcon® concrete anchors



PAVER-CP-MT

For use when building fire pit enclosures with SRW block and a MT burner system.

INCLUDES >

SRW bracket kit and extender

Lintel - 12" L x 3" W

Screws and fittings

Tapcon® concrete anchors

SPARK IGNITION



MSI-BSMT1

Manual spark ignition kit for FPB "MT" Match Throw Systems featuring the burning spur.

COMPATIBLE WITH



CONVERSION KITS

FOR FIREGEAR PRODUCTS

MT Conversion Kits

| Model | Ignition | BTU |
|-----------|----------|---------|
| OAS-LPK47 | MT | 50,000 |
| OAS-LPK41 | MT | 75,000 |
| OAS-LPK35 | MT | 100,000 |
| OAS-LPK31 | MT | 125,000 |
| OAS-LPK29 | MT | 150,000 |
| OAS-LPK26 | MT | 175,000 |
| OAS-LPK22 | MT | 200,000 |
| OAS-LPK19 | MT | 225,000 |
| OAS-LPK12 | MT | 250,000 |

TPSI Conversion Kits

| Model | Ignition | BTU |
|------------|----------|---------|
| TPSI-LPK47 | TPSI | 50,000 |
| TPSI-LPK41 | TPSI | 75,000 |
| TPSI-LPK35 | TPSI | 100,000 |
| TPSI-LPK31 | TPSI | 125,000 |
| TPSI-LPK29 | TPSI | 150,000 |

AWS Conversion Kits



This is the Pilot Burner Orifice for AWS products. In order to convert from NG to LP, you would use this in addition to a **MT Conversion Kit** (listed on the left side of the page).


| Model | Description |
|--------------|---|
| FG-AWS-PBO-P | Pilot Burner Orifice for FG-AWS30VDC-GOEK and FG-AWS30VDC-K (AWS Standard Capacity 30VDC Valve) Conversion from NG to LP |
| FG-AWS-PBO-N | Pilot Burner Orifice for FG-AWS30VDC-GOEK and FG-AWS30VDC-K (AWS Standard Capacity 30VDC Valve) Conversion from LP to NG |

We offer a Pilot Burner Orifice if you wish to convert from LP to NG. **We do not currently sell the LP to NG orifice kits.**

JEWELRY FOR YOUR FIRE FEATURE

ROCK MEDIA



Lava Rock 
 Each rock is approximately 1" to 2" in diameter
 FG-LAVA-10 10 lbs.
 FG-LAVA-40 1 cubic foot (approx 30 - 40 lbs.)



Lava Stones
 Each stone is approximately 1" to 2" in diameter
 FG-LS50 50 lbs.

BROKEN GLASS >> approx 1/2" - 1" in size



Black
GL-BLACK-10



Copper
GL-COPPER-10



Crystal
GL-CRYSTAL-10



Dark Blue
GL-DARKBLUE-10



Light Blue
GL-LIGHTBLUE-10



Seabreeze
GL-SEABREEZE-10

REFLECTIVE GLASS >> approx 1/2" - 1" in size



Black
GRL-BLACK-10



Bronze
GRL-BRONZE-10



Cobalt
GRL-COBALT-10



Copper
GRL-COPPER-10



Silver
GRL-SILVER-10

SOLD IN
10LB JUGS



STEEL LOG SETS



Ironwood Steel (7)
L-IW-SM



Ironwood Steel (11)
L-IW-MED



Ironwood Steel (14)
L-IW-LG



Ironwood Steel (14)
L-IW-XL



Twig Set (4)
L-IW-TWIG810



Twig Set (5)
L-IW-TWIG1214

CONCRETE LOG SETS



Sedona (19)
L-SEDONA



Spit Fire (17)
L-SF



Birch (5)
L-BR-3048



Birch (6)
L-BR-6084



Driftwood (5)
L-DW-3048



Driftwood (6)
L-DW-6084




New Oak (5)
L-NO-3048



New Oak (6)
L-NO-6084

CONCRETE TWIG SETS



Black Reflective Glass in the Kalea Bay | GRL-BLACK-10 

ACCESSORIES FOR FIREGEAR PRODUCTS

GLASS WINDSHIELDS

| Round | | Square | | Linear | |
|---------|---------------------|----------|------------------|----------|------------------------------|
| Model | Dimensions | Model | Dimensions | Model | Dimensions |
| GWS-23R | 23" Diameter x 8" H | GWS-2424 | 24" W x 7 1/2" H | GWS-2911 | 29 1/2" L x 11 1/2" W x 6" H |
| GWS-32R | 32" Diameter x 8" H | GWS-3030 | 30" W x 7 1/2" H | GWS-2917 | 29 1/2" L x 17" W x 6" H |
| GWS-36R | 36" Diameter x 8" H | GWS-3838 | 38" W x 7 1/2" H | GWS-3511 | 35 1/2" L x 11 1/2" W x 6" H |
| GWS-38R | 38" Diameter x 8" H | GWS-4242 | 42" W x 7 1/2" H | GWS-3517 | 35 1/2" L x 17" W x 6" H |
| GWS-48R | 48" Diameter x 8" H | | | GWS-4111 | 41 1/2" L x 11 1/2" W x 6" H |
| GWS-60R | 60" Diameter x 8" H | | | GWS-4119 | 41" L x 19" W x 6" H |

STAINLESS STEEL LIDS



| Round | | | Square | | | Linear > H | | |
|----------|-----------------------|----------------|---------|------------------|----------------|-------------|---------------------------------|-------------|
| Model | Dimensions | Fits Models | Model | Dimensions | Fits Models | Model | Dimensions | Fits Models |
| LID-19R2 | 22" Diameter x 2.5" H | FPB-19R Series | LID-20S | 22" W x 1 1/2" H | FPB-20S Series | LID-LOF2412 | 26 3/4" L x 14 3/4" W x 27/8" H | LOF2412 |
| LID-25R2 | 28" Diameter x 2.5" H | FPB-25R Series | LID-26S | 28" W x 1 1/2" H | FPB-26S Series | LID-LOF3012 | 32 3/4" L x 14 3/4" W x 27/8" H | LOF3012 |
| LID-29R2 | 32" Diameter x 2.5" H | FPB-29R Series | LID-32S | 32" W x 1 1/2" H | FPB-32S Series | LID-LOF3614 | 38 3/4" L x 16 3/4" W x 27/8" H | LOF3614 |
| LID-33R2 | 36" Diameter x 2.5" H | FPB-33R Series | LID-38S | 38" W x 1 1/2" H | FPB-38S Series | LID-LOF4214 | 44 3/4" L x 16 3/4" W x 27/8" H | LOF4214 |

GAS VALVE ACCESSORIES



KEY-PC-12
12" polished chrome key for key valve



KV-PC-12
High capacity straight key valve with polished chrome key cover and 12" key (350,000 BTU @ 1/2 PSI)



VENT-KIT-6X12SS
Includes 2 stainless steel 6" tall x 12" wide vents. Each vent provides 18 square inches of cross ventilation.



| Model | Dimensions | Fits Models |
|-------------|--------------------------------|-------------|
| LID-LOF2406 | 26 3/4" L x 8 3/4" W x 27/8" H | LOF2406 |
| LID-LOF3006 | 32 3/4" L x 8 3/4" W x 27/8" H | LOF3006 |
| LID-LOF3606 | 38 3/4" L x 8 3/4" W x 27/8" H | LOF3606 |
| LID-LOF4806 | 50 3/4" L x 8 3/4" W x 27/8" H | LOF4806 |
| LID-LOF6006 | 62 3/4" L x 8 3/4" W x 27/8" H | LOF6006 |
| LID-LOF7206 | 74 3/4" L x 8 3/4" W x 27/8" H | LOF7206 |
| LID-LOF8406 | 86 3/4" L x 8 3/4" W x 27/8" H | LOF8406 |
| LID-LOF9606 | 98 3/4" L x 8 3/4" W x 27/8" H | LOF9606 |

PROPANE ACCESSORIES



FG-12QDK
Quick Disconnect Kit for use with Natural Gas or Liquid Propane - 12" (144"), 3/8" I.D.



FG-32LPHRK
32" Liquid Propane Hose and Regulator Kit, Rated at 85,375 BTU @10" W.C. CSA-AGA/CGA Approved.



FG-60LPHRK
60" Liquid Propane Hose and Regulator Kit, Rated at 130K BTU @10" W.C. CSA-AGA/CGA Approved.



FG-LPQDK
LP quick disconnect kit - includes 12" (144") 1/2" OD, 3/8" ID, gray PVC hose with quick disconnect fitting.



FG-LPRK
100K BTU Liquid Propane Regulator, 3/8" MPT Adapter and Acme Quick Connect. CSA-AGA/CGA approved.

FLEXLINES



T200-9898-10
1/2" OD (3/8" ID) x 10", with 1/2" OD FLARE NUTS

T200-9898-16
1/2" OD (3/8" ID) x 16", with 1/2" OD FLARE NUTS

T200-9898-22
1/2" OD (3/8" ID) x 22", with 1/2" OD FLARE NUTS

T200-9898-28
1/2" OD (3/8" ID) x 28", with 1/2" OD FLARE NUTS

T200-9898-34
1/2" OD (3/8" ID) x 34", with 1/2" OD FLARE NUTS

T200-9898-46
1/2" OD (3/8" ID) x 46", with 1/2" OD FLARE NUTS

FITTINGS



U1-6C-S
Steel Gas Flare Fitting,
3/8" OD Flare x 3/8" MIP
(tapped 1/8" FIP)



U1-6D-S
Steel Gas Flare Fitting,
3/8" OD Flare x 1/2" MIP
(tapped 3/8" FIP)



U1-8C-S
Steel Gas Flare Fitting,
1/2" OD Flare x 3/8" MIP
(tapped 1/4" FIP)



U1-8D-S
Steel Gas Flare Fitting,
1/2" OD Flare x 1/2" MIP
(tapped 3/8" FIP)



U3-6D-S
Steel Gas Flare Fitting,
3/8" OD Flare x 1/2" MIP



U3-8D-S
Steel Gas Flare Fitting,
1/2" OD Flare x 1/2" FIP

ESTOP TIMER



ESTOP1-0H

Unique all mechanical gas shut-off timer with built-in emergency stop - no power required
High Btu capacity
Safest gas timer available in the industry
Available in 1 hour models
Innovative multi-port design provides installation flexibility
1/2" NPT inlets and outlets (side and back)
Six (6) mounting holes (front and side) for secure installation
Natural gas (NG) or Liquid Propane (LP) - no conversion necessary
Dial has UV Protection



ESTOP-CP-KIT
Control panel designed to house ESTOP1-0H timer.



ESTOP-LC-KIT
Locking Cabinet designed to house ESTOP1-0H timer (Removable Lock)



ESTOP-RM-KIT
Surface mount enclosure designed to house ESTOP1-0H timer.

REPLACEMENT KITS

FG-AWS-SVC-KIT

FG-TP : Thermopile - for primary pilot assembly
FG-HSI : Hot Surface Ignition - for pilot burner assembly
FG-AWS-CONTROLLER : Main Controller Module

TPSI-SVC-KIT-N

Universal FP Connection Kit for TPSI Units. Includes:
Copreci High Capacity Valve
48" PSE-495 Pilot Assy
Control Knob/Nut
(2) Straight Inlet/Outlet Fittings (U1-8D-S)
Natural Gas

TPSI-SVC-KIT-P

Universal FP Connection Kit for TPSI Units. Includes:
Copreci High Capacity Valve
48" PSE-495 Pilot Assy
Control Knob/Nut
(2) Straight Inlet/Outlet Fittings (U1-8D-S)
Propane Gas

DISCONTINUED MODEL REPLACEMENT KITS

FG-TMSI-PILOT-SVC-KIT

FG-IGNIT-ASSY-PI: Igniter Assembly
FG-SPARK-IGN: Spark Igniter Assembly
FG-GASVALVE-2: Gas Valve (piloted)
FG-CONTROL-KNOB: Control Knob

FG-TFS-SVC-KIT

VCS-5000MODTC : Module
AF-4000BP12 : Battery Pack w/12' wire
TFS-IGNIT-ASSEMBLY : Igniter Assembly
ST3-100-1027 : Mesh Screen cover for Ignition Hood
ST3-113-1028 : Stainless Thread Cutting Screws (8)

FG-LTFS-SVC-KIT

PILOTO-23300-206 : Pilot Assembly
VCS-5000MODTC : Module
AF-4000BP12 : Battery Pack w/12' wire

FG-TMSI-SVC-KIT

TMS-TC-ASSEMBLY : Thermocouple/Rainshield Replacement Kit
ST3-080-1009 : Copreci Manual Gas Valve
ST3-110-1005 : Mounting Nut for Copreci Valve
ST3-050-1024 : Manual Gas Valve Knob for Copreci Valve
3042-RB : Manual Spark Ignitor Module with Red Button
PIEZO23WH : 23" Piezo Extension wire
PIEZO48WH : 48" Piezo Extension wire
ST3-100-1027 : Mesh Screen Cover (for ignition hood)
ST3-113-1028 : Stainless Thread Cutting Screws

AWS IGNITION REPLACEMENT PARTS



FG-AWS-PS-30V320
30VDC, 320W Power Supply



GOE-30VDC
30 VDC power supply for single fire feature



FG-PBA
FG-AWS pilot burner assembly (30" long) - For **NG**



FG-PBA-P
FG-AWS pilot burner assembly (30" long) - For **LP**



FG-TIMER-2HR
Two (2) hour mechanical timer.



FG-1420-AOD
1420-A (On/Off/Remote) with 110 Receiver.



FG-EMER-STOP
Electronic emergency stop for 120VAC or 30 VDC.



FG-FD2HW
120 min mechanical timer (no enclosure)



FG-ICB
AWS Ignition control box



FG-HEATSHIELD
AWS heat shield

HOW MUCH MEDIA?

KALEA BAY

| Model | Glass Only |
|---------------|------------|
| 36" Kalea Bay | 15 lbs |
| 48" Kalea Bay | 20 lbs |
| 60" Kalea Bay | 25 lbs |
| 72" Kalea Bay | 25 lbs |

SANCTUARY 1 & 76

| Model | Glass Only | Lava Rock Only | Lava Stones Only |
|----------|------------|----------------|------------------|
| Sanct 1 | 30 lbs | 20 lbs | 35 lbs |
| Sanct 76 | 40 lbs | 30 lbs | 45 lbs |

SANCTUARY 2 & 3

| Model | Glass Only | Lava Rock Only | Glass Only |
|---------|------------|----------------|------------|
| Sanct 2 | 120 lbs | 30 lbs | 30 lbs |
| Sanct 3 | 70 lbs | 15 lbs | 20 lbs |

ROUND FIRE PITS

| ID of Fire Pit | Lava Rock Only | Lava Rock as a Base | Glass on top of Lava Rock | Lava Stones on top of Lava Rock | Glass Only |
|----------------|----------------|---------------------|---------------------------|---------------------------------|------------|
| 16" | 10 lbs | 5 lbs | 10 lbs | 10 lbs | 30 lbs |
| 19" | 10 lbs | 10 lbs | 20 lbs | 15 lbs | 40 lbs |
| 25" | 15 lbs | 15 lbs | 30 lbs | 20 lbs | 70 lbs |
| 29" | 20 lbs | 20 lbs | 40 lbs | 25 lbs | 90 lbs |
| 33" | 25 lbs | 25 lbs | 50 lbs | 30 lbs | 110 lbs |
| 34" | 30 lbs | 25 lbs | 60 lbs | 30 lbs | 120 lbs |
| 44" | 45 lbs | 35 lbs | 70 lbs | 50 lbs | 200 lbs |

SQUARE FIRE PITS

| ID of Fire Pit | Lava Rock Only | Lava Rock as a Base | Glass on top of Lava Rock | Lava Stones on top of Lava Rock | Glass Only |
|----------------|----------------|---------------------|---------------------------|---------------------------------|------------|
| 20" | 10 lbs | 10 lbs | 20 lbs | 15 lbs | 50 lbs |
| 26" | 15 lbs | 15 lbs | 30 lbs | 20 lbs | 90 lbs |
| 32" | 25 lbs | 25 lbs | 50 lbs | 30 lbs | 130 lbs |
| 38" | 30 lbs | 30 lbs | 60 lbs | 35 lbs | 190 lbs |

STAINLESS STEEL > H DROP-IN

| Pan Size | Lava Rock | Glass | Lava Stones |
|----------|-----------|---------|-------------|
| 24 x 12 | 20 lbs | 40 lbs | 20 lbs |
| 30 x 12 | 20 lbs | 50 lbs | 20 lbs |
| 36 x 14 | 30 lbs | 70 lbs | 30 lbs |
| 48 x 14 | 40 lbs | 90 lbs | 40 lbs |
| 60 x 16 | 50 lbs | 130 lbs | 50 lbs |
| 72 x 16 | 60 lbs | 150 lbs | 60 lbs |
| 84 x 16 | 70 lbs | 180 lbs | 70 lbs |
| 96 x 16 | 80 lbs | 200 lbs | 80 lbs |

STAINLESS STEEL > H FLAT

| Pan Size | Lava Rock | Glass | Lava Stones |
|----------|-----------|---------|-------------|
| 24 x 14 | 20 lbs | 50 lbs | 20 lbs |
| 30 x 14 | 20 lbs | 60 lbs | 20 lbs |
| 36 x 14 | 30 lbs | 70 lbs | 30 lbs |
| 48 x 14 | 40 lbs | 90 lbs | 40 lbs |
| 60 x 16 | 50 lbs | 130 lbs | 50 lbs |
| 42 x 16 | 60 lbs | 150 lbs | 60 lbs |
| 84 x 16 | 70 lbs | 180 lbs | 70 lbs |
| 96 x 16 | 80 lbs | 200 lbs | 80 lbs |

PRO SERIES > H FLAT

| Pan Size | Lava Rock | Glass | Lava Stones |
|----------|-----------|---------|-------------|
| 30 x 10 | 20 lbs | 40 lbs | 20 lbs |
| 36 x 10 | 20 lbs | 50 lbs | 20 lbs |
| 48 x 10 | 30 lbs | 60 lbs | 30 lbs |
| 60 x 10 | 40 lbs | 80 lbs | 40 lbs |
| 72 x 10 | 50 lbs | 100 lbs | 50 lbs |
| 96 x 10 | 60 lbs | 130 lbs | 60 lbs |

STAINLESS STEEL > T DROP-IN


| Pan Size | Lava Rock | Glass | Lava Stones |
|----------|-----------|--------|-------------|
| 24 x 6 | 10 lbs | 20 lbs | 10 lbs |
| 30 x 6 | 10 lbs | 30 lbs | 10 lbs |
| 36 x 6 | 10 lbs | 30 lbs | 10 lbs |
| 48 x 6 | 20 lbs | 40 lbs | 20 lbs |
| 60 x 6 | 20 lbs | 50 lbs | 20 lbs |
| 72 x 6 | 20 lbs | 60 lbs | 20 lbs |
| 84 x 6 | 30 lbs | 70 lbs | 30 lbs |
| 96 x 6 | 30 lbs | 80 lbs | 30 lbs |

STAINLESS STEEL > T FLAT

| Pan Size | Lava Rock | Glass | Lava Stones |
|----------|-----------|---------|-------------|
| 24 x 8 | 10 lbs | 30 lbs | 10 lbs |
| 30 x 8 | 20 lbs | 30 lbs | 20 lbs |
| 36 x 8 | 20 lbs | 40 lbs | 20 lbs |
| 48 x 8 | 20 lbs | 50 lbs | 20 lbs |
| 60 x 8 | 30 lbs | 60 lbs | 30 lbs |
| 72 x 8 | 30 lbs | 80 lbs | 30 lbs |
| 84 x 8 | 40 lbs | 90 lbs | 40 lbs |
| 96 x 8 | 40 lbs | 100 lbs | 40 lbs |


Lava Rock ONLY

When using lava rock, use enough to cover entire burner. Do not over-fill. Just use enough to hide the burner from view.

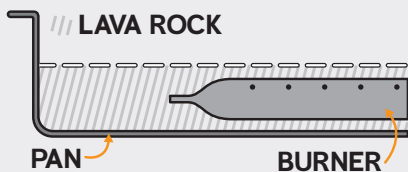


Lava Rock UNDER Glass

In order to use glass, you must lay down a layer of lava rock. Fill the pan with lava rock until it is level with the top of the burner. Then take your glass and lay it on top of the lava rock and burner. The glass should only be 3/4" to 1" thick, or just enough to cover the burner.

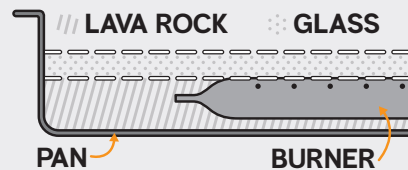

Lava Rock UNDER Stones

In order to use lava stones, you must lay down a layer of lava rock. Fill the pan with lava rock until it is level with the top of the burner. Then take your lava stones and lay it on top of the lava rock and burner. The lava stones should only be one layer thick, just enough to cover the burner.

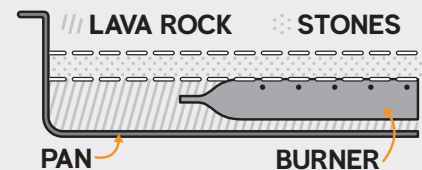

GAS PIPE SIZING CHART

⌵ NATURAL GAS (NG)

| Pipe Length (ft.) | 1/2" | 3/4" | 1" | 1 - 1 1/4" | 1 - 1 1/2" | 2" | 2 - 2 1/2" | 3" | 4" |
|-------------------|------|------|-----|------------|------------|------|------------|------|------|
| 10 | 108 | 230 | 387 | 793 | 1237 | 2259 | 3640 | 6434 | - |
| 20 | 75 | 160 | 280 | 569 | 877 | 1610 | 2613 | 5236 | 9521 |
| 30 | 61 | 129 | 224 | 471 | 719 | 1335 | 2165 | 4107 | 7859 |
| 40 | 52 | 110 | 196 | 401 | 635 | 1143 | 1867 | 3258 | 6795 |
| 50 | 46 | 98 | 177 | 364 | 560 | 1041 | 1680 | 2936 | 6142 |
| 60 | 42 | 89 | 159 | 336 | 513 | 957 | 1559 | 2684 | 5647 |
| 70 | 38 | 82 | 149 | 317 | 476 | 896 | 1447 | 2492 | 5250 |
| 80 | 36 | 76 | 140 | 239 | 443 | 840 | 1353 | 2315 | 4900 |
| 90 | 33 | 71 | 133 | 275 | 420 | 793 | 1288 | 2203 | 4667 |
| 100 | 32 | 68 | 126 | 266 | 411 | 775 | 1246 | 2128 | 4518 |
| 125 | 28 | 60 | 117 | 243 | 369 | 700 | 1143 | 1904 | 4065 |
| 150 | 25 | 54 | 105 | 215 | 327 | 625 | 1008 | 1689 | 3645 |
| 175 | 23 | 50 | 93 | 196 | 303 | 583 | 993 | 1554 | 3370 |
| 200 | 22 | 47 | 84 | 182 | 280 | 541 | 877 | 1437 | 3160 |
| 300 | 17 | 37 | 70 | 145 | 224 | 439 | 686 | 1139 | 2539 |

Natural Gas (NG) flow is given in thousands of BTU/hr. One cubic foot of NG gas - 1000 BTU.

Nominal pressure at the burner for Natural Gas is 3.5" of water column. (Typical machine supply 5" - 7").

Pipe length must include additional length for all fittings. Add approximately 5 feet of pipe per fitting.

Natural Gas Example: A machine with a burner that requires 440,000 BTU would need a 1 - 1/4" pipe for a 20' long run.

⌵ LIQUID PROPANE (LP)

| Pipe Length (ft.) | 1/2" | 3/4" | 1" | 1 - 1 1/4" | 1 - 1 1/2" | 2" | 2 - 2 1/2" | 3" | 4" |
|-------------------|------|------|------|------------|------------|------|------------|-------|-------|
| 10 | 275 | 567 | 1071 | 2205 | 3307 | 6221 | 10140 | 17990 | 35710 |
| 20 | 189 | 393 | 732 | 1496 | 2299 | 4331 | 7046 | 12510 | 25520 |
| 30 | 152 | 315 | 590 | 1212 | 1858 | 3465 | 5695 | 10110 | 20620 |
| 40 | 129 | 267 | 504 | 1039 | 1559 | 2992 | 4778 | 8481 | 17300 |
| 50 | 114 | 237 | 448 | 913 | 1417 | 2646 | 4343 | 7708 | 15730 |
| 60 | 103 | 217 | 409 | 834 | 1275 | 2394 | 3908 | 6936 | 14150 |
| 70 | 89 | 185 | 346 | 724 | 1086 | 2047 | 3329 | 5908 | 12050 |
| 80 | 78 | 162 | 307 | 630 | 976 | 1811 | 2991 | 5309 | 10830 |
| 90 | 69 | 146 | 275 | 567 | 866 | 1606 | 2654 | 4711 | 9613 |
| 100 | 63 | 132 | 252 | 511 | 787 | 1496 | 2412 | 4281 | 8736 |
| 125 | 54 | 112 | 209 | 439 | 665 | 1282 | 2083 | 3618 | 7382 |
| 150 | 48 | 100 | 185 | 390 | 590 | 1138 | 1808 | 3210 | 6549 |
| 175 | 43 | 90 | 168 | 353 | 534 | 1030 | 1637 | 2905 | 5927 |
| 200 | 40 | 83 | 155 | 325 | 491 | 947 | 1505 | 2671 | 5450 |
| 300 | 37 | 77 | 144 | 303 | 458 | 887 | 1404 | 2492 | 5084 |

Liquid Propane (LP) flow is given in thousands of BTU/hr. One cubic foot of NG gas - 2516 BTU.

This chart refers to low pressure LP, after regulation, standard nominal pressure at the burner for Liquid Propane Gas is 11" of water column

Pipe length must include additional length for all fittings. Add approximately 5 feet of pipe per fitting.

Liquid Propane Example: A machine with a burner that requires 440,000 BTU would need a 1" pipe for a 20' long run.

NOTE: The sizing charts above list the specific pipe sizes required for the amount of BTU's for a new gas line installations. If you are using an existing gas line you must take into consideration the existing gas line capacities to ensure you will have proper pressure.

This chart is for reference only, we recommend you consult with a Licensed Plumber/Gas Fitter or NFPA54 (National Fuel Gas Code - current edition) for more details.

HIGH ELEVATION INSTALLATION

This appliance is listed for elevations from 0 - 4500ft in Canada and the United States. If elevation exceeds 4500ft it may be necessary to decrease the input rating by changing the existing burner orifice to a smaller size. Input should be reduced 4% for each 1000ft beyond the 4500ft above sea level.

Check with your local utility for assistance in determining the proper orifice in your location. In some cases the heating value may already be reduced and downsizing the orifice may not be necessary.



THE BEST ROOM IN THE HOUSE
ISN'T IN THE HOUSE AT ALL



Tech & Sales | 800.966.8126

firegearoutdoors.com

14520 Delta Ln - Suite 105 | Huntington Beach | California, 92647

POP-FG-BROCHURE ver. 061024